

DM74AS157/DM74AS158 Quad 1 of 2 Line Data Selector/Multiplexer

General Description


These data selectors/multiplexers contain inverters and drivers to supply full on-chip data selection to the four output gates. A separate **STROBE** input is provided. A 4-bit word is selected from one of two sources and is routed to the four outputs. The AS157 presents true data whereas the AS158 presents inverted data to minimize propagation delay time.

Features

- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and V_{CC} range
- Advanced oxide-isolated, ion-implanted Schottky TTL process

- Functionally and pin for pin compatible with Schottky, low power Schottky, and advanced low power Schottky TTL counterpart
- Improved AC performance over Schottky, low power Schottky, and advanced low power Schottky counterparts
- Expand any data input point
- Multiplex dual data buses
- General four functions of two variables (one variable is common)
- Source programmable counters

Connection Diagram

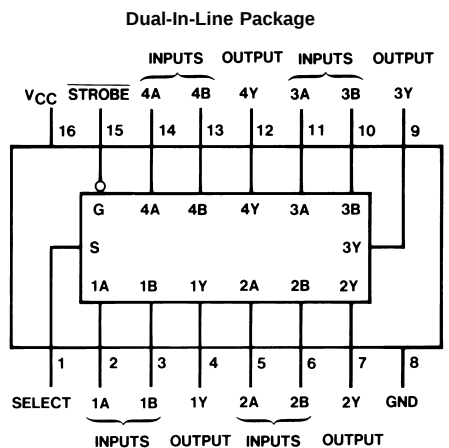

Function Table

Inputs				Output Y	
STROBE	Select	A	B	AS157	AS158
H	X	X	X	L	H
L	L	L	X	L	H
L	L	H	X	H	L
L	H	X	L	L	H
L	H	X	H	H	L

H = High Level, L = Low Level, X = Don't Care

Absolute Maximum Ratings (Note 1)

Supply Voltage
Input Voltage
Operating Free Air Temperature

7V
7V

Range
Storage Temperature Range
Typical θ_{JA}
N Package

0°C to +70°C
-65°C to +150°C
75.0 °C/W

Recommended Operating Conditions

Symbol	Parameter	DM74AS157, 158			Units
		Min	Nom	Max	
V_{CC}	Supply Voltage	4.5	5	5.5	V
V_{IH}	High Level Input Voltage	2			V
V_{IL}	Low Level Input Voltage			0.8	V
I_{OH}	High Level Output Current			-2	mA
I_{OL}	Low Level Output Current			20	mA
T_A	Free Air Operating Temperature	0		70	°C

Note 1: The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

Electrical Characteristics

over recommended operating free air temperature range. All typical values are measured at $V_{CC} = 5V$, $T_A = 25^\circ C$.

Symbol	Parameter	Conditions	Min	Typ	Max	Units
V_{IK}	Input Clamp Voltage	$V_{CC} = 4.5V$, $I_I = -18\text{ mA}$			-1.2	V
V_{OH}	High Level Output Voltage	$V_{CC} = 4.5V$ to $5.5V$, $I_{OH} = -2\text{ mA}$	$V_{CC} - 2$			V
V_{OL}	Low Level Output Voltage	$V_{CC} = 4.5V$, $I_{OL} = 20\text{ mA}$		0.35	0.5	V
I_I	Input Current at Max Input Voltage	$V_{CC} = 5.5V$, $V_{IH} = 7V$	Select		0.2	mA
			All Others		0.1	
I_{IH}	High Level Input Current	$V_{CC} = 5.5V$, $V_{IH} = 2.7V$	Select		40	μA
			All Others		20	
I_{IL}	Low Level Input Current	$V_{CC} = 5.5V$, $V_{IL} = 0.4V$	Select		-1	mA
			All Others		-0.5	
I_O (Note 3)	Output Drive Current	$V_{CC} = 5.5V$, $V_O = 2.25V$	-30		-112	mA
I_{CC}	Supply Current	$V_{CC} = 5.5V$	'AS157		17.5	mA
			'AS158		15.6	mA

Note 2: The output conditions have been chosen to produce a current that closely approximates one half of the true short circuit current, I_{OS} .

'AS157 Switching Characteristics

over recommended operating free air temperature range (Note 3)

Symbol	Parameter	Conditions	From (Input)	To (Output)	DM74AS157		Units
					Min	Max	
t _{PLH}	Propagation Delay Time, Low to High Level Output	V _{CC} = 4.5V to 5.5V, C _L = 50 pF, R _L = 500Ω	Data	Y	1	6	ns
t _{PHL}	Propagation Delay Time, High to Low Level Output		Data	Y	1	5.5	ns
t _{PLH}	Propagation Delay Time, Low to High Level Output		STROBE	Y	2	10.5	ns
t _{PHL}	Propagation Delay Time, High to Low Level Output		STROBE	Y	2	7.5	ns
t _{PLH}	Propagation Delay Time, Low to High Level Output		Select	Y	2	11	ns
t _{PHL}	Propagation Delay Time, High to Low Level Output		Select	Y	2	10	ns



'AS158 Switching Characteristics

over recommended operating free air temperature range (Note 3)


Symbol	Parameter	Conditions	From (Input)	To (Output)	DM74AS158		Units
					Min	Max	
t _{PLH}	Propagation Delay Time, Low to High Level Output	V _{CC} = 4.5V to 5.5V, C _L = 50 pF, R _L = 500Ω	Data	Y	1	5	ns
t _{PHL}	Propagation Delay Time, High to Low Level Output		Data	Y	1	4.5	ns
t _{PLH}	Propagation Delay Time, Low to High Level Output		STROBE	Y	2	6.5	ns
t _{PHL}	Propagation Delay Time, High to Low Level Output		STROBE	Y	2	10	ns
t _{PLH}	Propagation Delay Time, Low to High Level Output		Select	Y	2	9.5	ns
t _{PHL}	Propagation Delay Time, High to Low Level Output		Select	Y	2	10.5	ns

Note 3: See Section 1 for test waveforms and output load.


Logic Diagrams

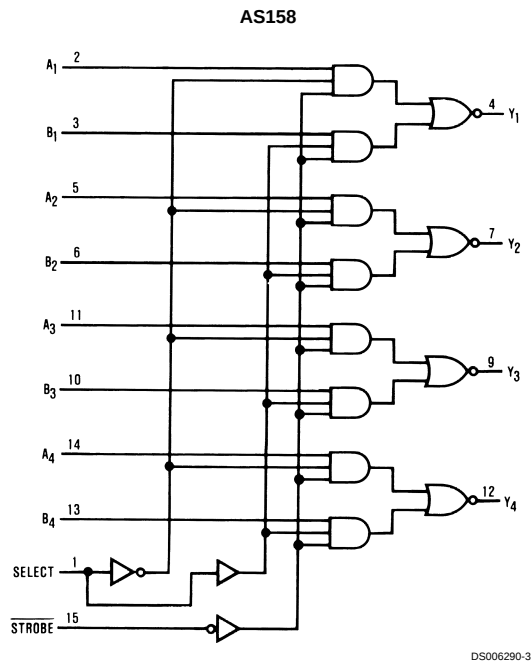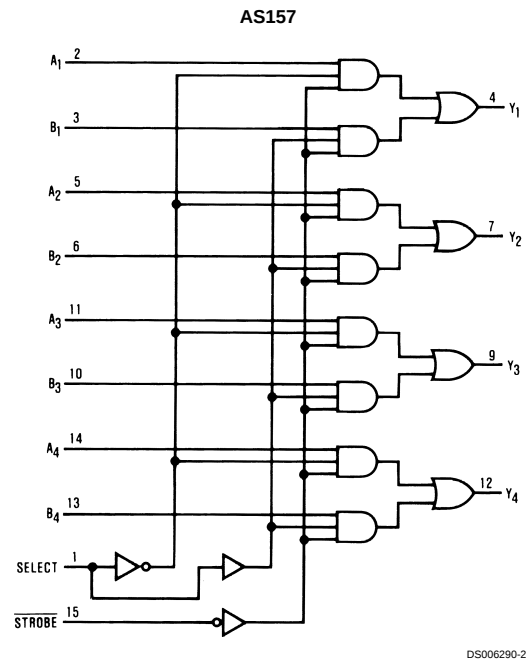

Physical Dimensions inches (millimeters) unless otherwise noted

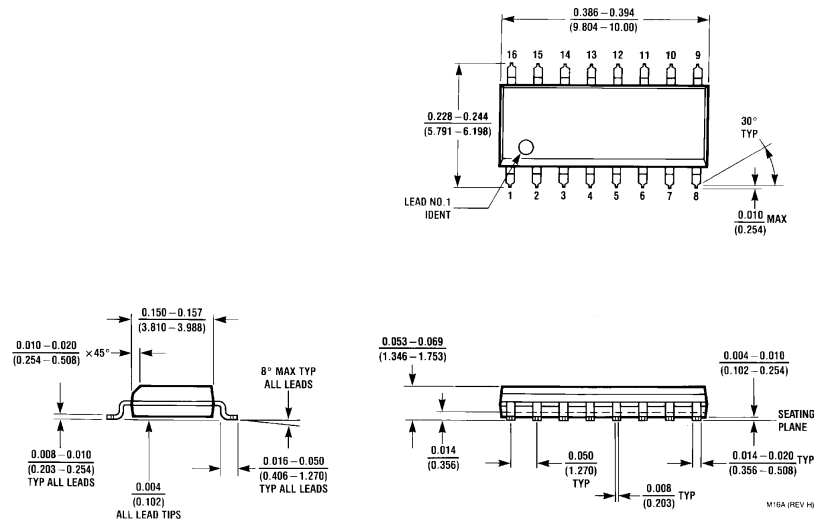

**16-Lead (0.150" Wide) Molded
Small Outline Package, JEDEC**
Order Number DM74AS157M or DM74AS158M
Package Number M16A

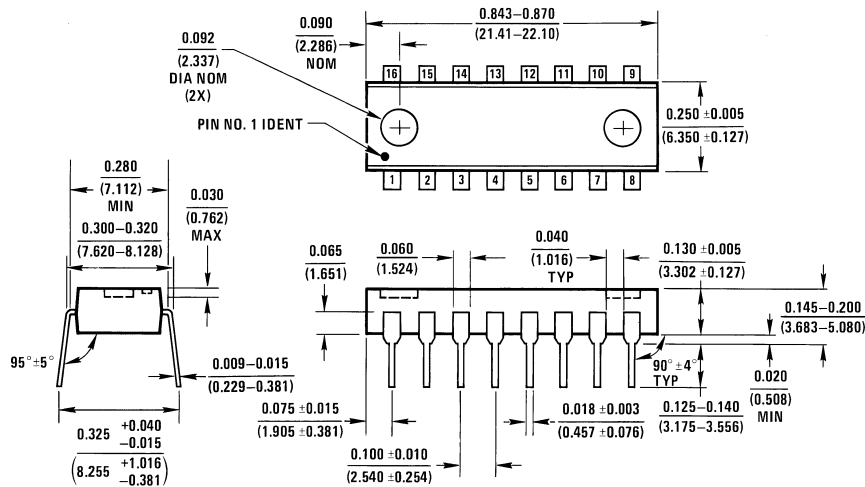

Molded Dual-In-Line Package (N)
Order Number DM74AS157N or DM74AS158N
Package Number N16A

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.

2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

Fairchild Semiconductor
Corporation
Americas
Customer Response Center
Tel: 1-888-522-5372

www.fairchildsemi.com

Fairchild Semiconductor
Europe
Fax: +49 (0) 1 80-530 85 86
Email: europe.support@nsc.com
Deutsch Tel: +49 (0) 8 141-35-0
English Tel: +44 (0) 1 793-85-68-56
Italy Tel: +39 (0) 2 57 5631

Fairchild Semiconductor
Hong Kong Ltd.
13th Floor, Straight Block,
Ocean Centre, 5 Canton Rd.
Tsimshatsui, Kowloon
Hong Kong
Tel: +852 2737-7200
Fax: +852 2314-0061

National Semiconductor
Japan Ltd.
Tel: 81-3-5620-6175
Fax: 81-3-5620-6179