

## DM74AS280 9-Bit Parity Generator/Checker

### General Description


These universal, 9-bit parity generators/checkers utilize advanced Schottky high performance circuitry and feature odd/even outputs to facilitate operation of either odd or even parity applications. The word length capability is easily expanded by cascading.

The AS280 can be used to upgrade the performance of most systems utilizing the '180 parity generator/checker. Although the AS280 is implemented without expander inputs, the corresponding function is provided by the availability of an input at pin 4 and no internal connection at pin 3. This permits the AS280 to be substituted for the '180 in existing designs to produce identical function even if 'AS280s are mixed with existing '180s.

### Features

- Generates either odd or even parity for nine data lines
- Inputs are buffered to lower the drive requirements
- Can be used to upgrade existing systems using MSI parity circuits
- Cascadable for N-bits
- Advanced oxide-isolated, ion-implanted Schottky TTL process
- Switching specifications at 50 pF
- Switching specifications guaranteed over full temperature and  $V_{CC}$  range

### Connection Diagram

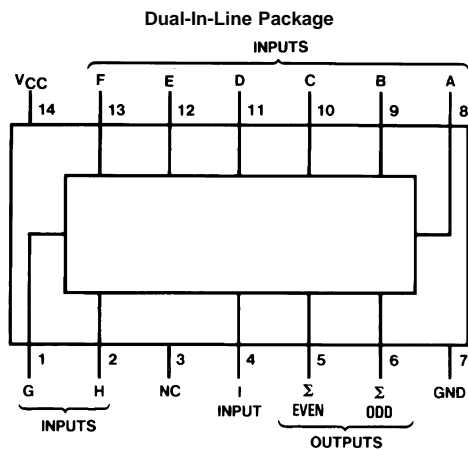

DS006303-1

Order Number DM74AS280M  
or DM74AS280N  
See Package Number M14A or N14A

### Function Table

| Number of Inputs (A thru I) that are High | Outputs       |              |
|---|---------------|--------------|
|   | $\Sigma$ Even | $\Sigma$ Odd |
| 0, 2, 4, 6, 8                             | H             | L            |
| 1, 3, 5, 7, 9                             | L             | H            |

L = Low State  
H = High State

**Absolute Maximum Ratings** (Note 1)

|                                      |              |
|--------------------------------------|--------------|
| Supply Voltage                       | 7V           |
| Input Voltage                        | 7V           |
| Operating Free Air Temperature Range | 0°C to +70°C |

Storage Temperature Range

-65°C to +150°C

Typical  $\theta_{JA}$ 

N Package

77.0°C/W

M Package

108.0°C/W

**Recommended Operating Conditions**

| Symbol   | Parameter                      | Min | Typ | Max | Units |
|----------|--------------------------------|-----|-----|-----|-------|
| $V_{CC}$ | Supply Voltage                 | 4.5 | 5   | 5.5 | V     |
| $V_{IH}$ | High Level Input Voltage       | 2   |     |     | V     |
| $V_{IL}$ | Low Level Input Voltage        |     |     | 0.8 | V     |
| $I_{OH}$ | High Level Output Current      |     |     | -2  | mA    |
| $I_{OL}$ | Low Level Output Current       |     |     | 20  | mA    |
| $T_A$    | Free-Air Operating Temperature | 0   |     | 70  | °C    |

**Note 1:** The "Absolute Maximum Ratings" are those values beyond which the safety of the device cannot be guaranteed. The device should not be operated at these limits. The parametric values defined in the "Electrical Characteristics" table are not guaranteed at the absolute maximum ratings. The "Recommended Operating Conditions" table will define the conditions for actual device operation.

**Electrical Characteristics**

Over recommended free-air temperature range. All typical values are measured at  $V_{CC} = 5V$ ,  $T_A = 25^\circ C$ .

| Symbol   | Parameter                         | Conditions                                   | Min          | Typ  | Max  | Units   |
|----------|-----------------------------------|--|--------------|------|------|---------|
| $V_{IK}$ | Input Clamp Voltage               | $V_{CC} = 4.5V$ , $I_I = -18 mA$             |              |      | -1.2 | V       |
| $V_{OH}$ | High Level Output Voltage         | $I_{OH} = -2 mA$ , $V_{CC} = 4.5V$ to $5.5V$ | $V_{CC} - 2$ |      |      | V       |
| $V_{OL}$ | Low Level Output Voltage          | $V_{CC} = 4.5V$ , $I_{OL} = Max$             |              | 0.35 | 0.5  | V       |
| $I_I$    | Input Current @ Max Input Voltage | $V_{CC} = 5.5V$ , $V_{IH} = 7V$              |              |      | 0.1  | mA      |
| $I_{IH}$ | High Level Input Current          | $V_{CC} = 5.5V$ , $V_{IH} = 2.7V$            |              |      | 20   | $\mu A$ |
| $I_{IL}$ | Low Level Input Current           | $V_{CC} = 5.5V$ , $V_{IL} = 0.4V$            |              |      | -0.5 | mA      |
| $I_O$    | Output Drive Current              | $V_{CC} = 5.5V$ , $V_O = 2.25V$              | -30          |      | -112 | mA      |
| $I_{CC}$ | Supply Current                    | $V_{CC} = 5.5V$                              |              | 25   | 40   | mA      |


**Switching Characteristics**

over recommended operating free air temperature range (Note 2)

| Symbol    | Parameter  | Conditions  | From | To            | Min | Max  | Units |
|-----------|--|---|------|---------------|-----|------|-------|
| $t_{PLH}$ | Propagation Delay Time, Low to High Level Output | $V_{CC} = 4.5V$ to $5.5V$ ,<br>$C_L = 50 pF$ ,<br>$R_L = 500\Omega$ | Data | $\Sigma Even$ | 3   | 12   | ns    |
| $t_{PHL}$ | Propagation Delay Time, High to Low Level Output |   |      |               | 3   | 11   | ns    |
| $t_{PLH}$ | Propagation Delay Time, Low to High Level Output |   | Data | $\Sigma Odd$  | 3   | 12   | ns    |
| $t_{PHL}$ | Propagation Delay Time, High to Low Level Output |   |      |               | 3   | 11.5 | ns    |

**Note 2:** See Section 5 for test waveforms and output load.

## Logic Diagram

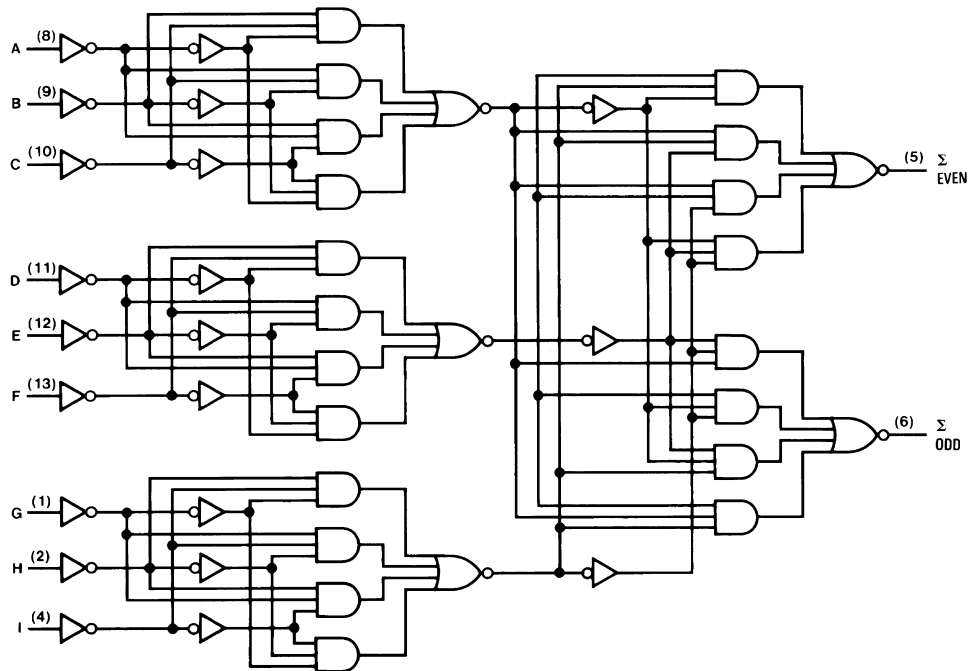

DS006303-2


## Typical Applications

Three AS280s can be used to implement a 25-line parity generator/checker.


As an alternative, the outputs of two or three parity generators/checkers can be decoded with a 2-input (AS86) or 3-input (S135) exclusive-OR gate for 18 or 27-line parity applications.

Longer word lengths can be implemented by cascading AS280s. As shown in *Figure 2*, parity can be generated for word lengths up to 81 bits.

**Typical Applications** (Continued)



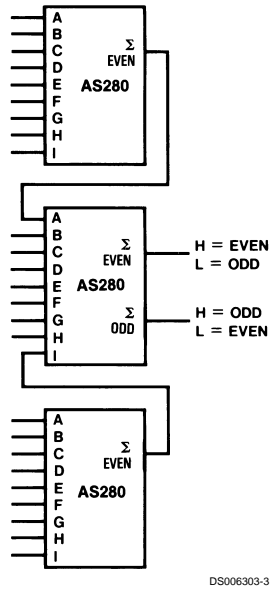


**FIGURE 1. 25-Line Parity/Generator Checker**

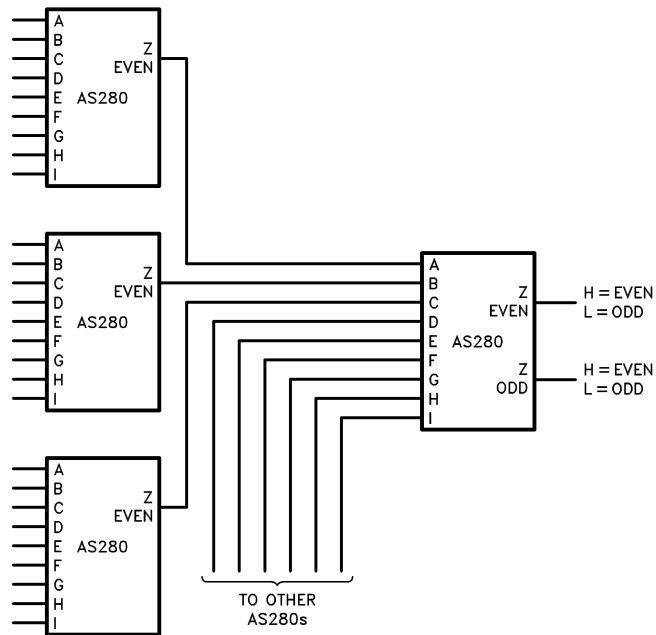





**FIGURE 2. 81-Line Parity/Generator Checker**

**Physical Dimensions** inches (millimeters) unless otherwise noted

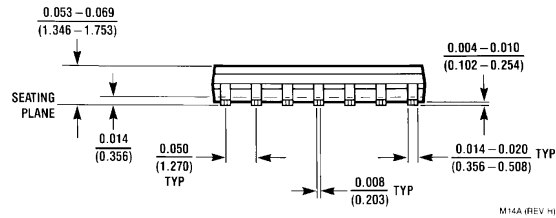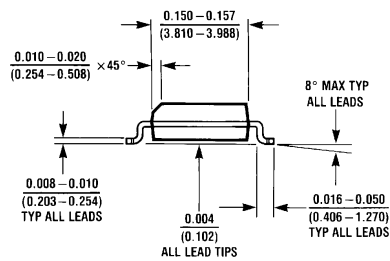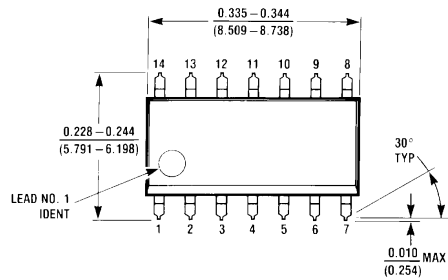

M14A (REV H)

**S.O. Package (M)**  
**Order Number DM74AS280M**  
**Package Number M14A**

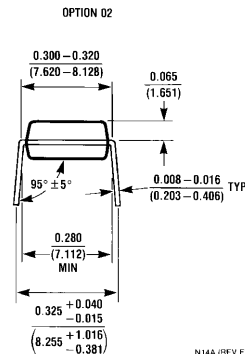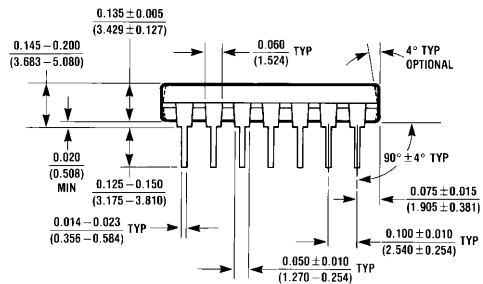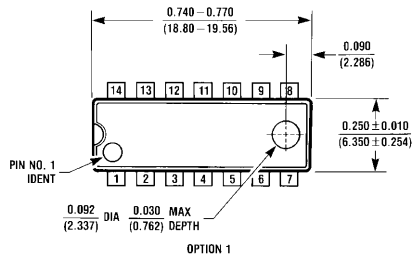

N14A (REV F)

**Molded Dual-In-Line Package (N)**  
**Order Number DM74AS280N**  
**Package Number N14A**

**LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

**Fairchild Semiconductor Corporation Americas**  
Customer Response Center  
Tel: 1-888-522-5372

**Fairchild Semiconductor Europe**  
Fax: +49 (0) 1 80-530 85 86  
Email: europe.support@nsc.com  
Deutsch Tel: +49 (0) 8 141-35-0  
English Tel: +44 (0) 1 793-85-68-56  
Italy Tel: +39 (0) 2 57 5631

**Fairchild Semiconductor Hong Kong Ltd.**  
13th Floor, Straight Block,  
Ocean Centre, 5 Canton Rd.  
Tsimshatsui, Kowloon  
Hong Kong  
Tel: +852 2737-7200  
Fax: +852 2314-0061

**National Semiconductor Japan Ltd.**  
Tel: 81-3-5620-6175  
Fax: 81-3-5620-6179

[www.fairchildsemi.com](http://www.fairchildsemi.com)