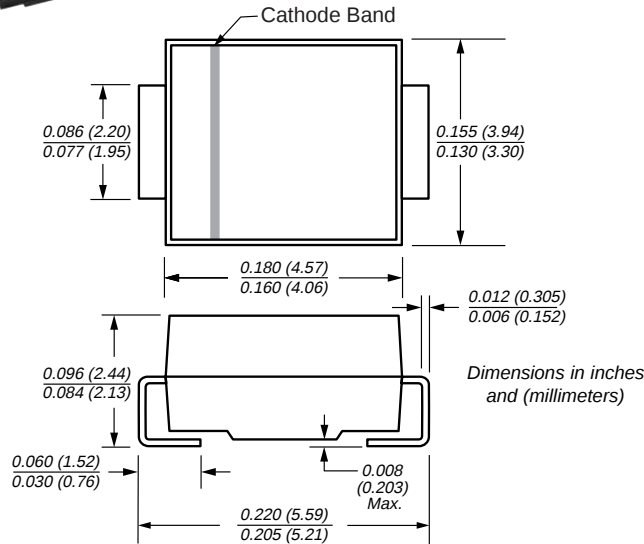
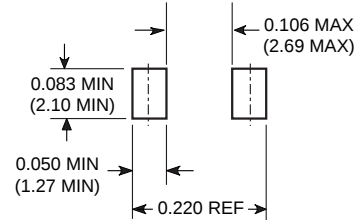



DO-214AA (SMB)

Reverse Voltage 50 to 200 V
Forward Current 2.0 A
Reverse Recovery Time 20 ns
Mounting Pad Layout


Mechanical Data

Case: JEDEC DO-214AA molded plastic body

Terminals: Solder plated, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Weight: 0.003 ounce, 0.093 grams

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- Ideally suited for use in very high frequency switching power supplies, inverters and as free wheeling diodes
- Ultrafast recovery time for high efficiency
- Excellent high temperature switching
- Glass passivated junction
- High temperature soldering guaranteed: 250°C/10 seconds, at terminals

Maximum Ratings & Thermal Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Parameter	Symbol	ES2A	ES2B	ES2C	ES2D	Unit
Device marking code		EA	EB	EC	ED	
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	150	200	V
Maximum RMS voltage	V_{RMS}	35	70	105	140	V
Maximum DC blocking voltage	V_{DC}	50	100	150	200	V
Maximum average forward rectified current at $T_L = 110^\circ\text{C}$	$I_{F(AV)}$	2.0				A
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at $T_L = 110^\circ\text{C}$	I_{FSM}	50				A
Maximum thermal resistance ⁽¹⁾	$R_{\theta JA}$ $R_{\theta JL}$	75 20				°C/W
Operating junction and storage temperature range	T_J, T_{STG}	-55 to +150				°C

Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Maximum instantaneous forward voltage at 2.0A ⁽²⁾	V_F	0.90	V
Maximum DC reverse current $T_A = 25^\circ\text{C}$ at rated DC blocking voltage $T_A = 100^\circ\text{C}$	I_R	10 350	μA
Max. reverse recovery time $I_F = 0.5\text{A}$, $I_R = 1.0\text{A}$, $I_{rr} = 0.25\text{A}$	t_{rr}	20	ns
Maximum reverse recovery time $T_J = 25^\circ\text{C}$ $I_F = 2.0\text{A}$, $V_R = 30\text{V}$, $di/dt = 50\text{A}/\mu\text{s}$, $I_r = 10\%$ I_{RM} $T_J = 100^\circ\text{C}$	t_{rr}	30 50	ns
Maximum stored charge $T_J = 25^\circ\text{C}$ $I_F = 2.0\text{A}$, $V_R = 30\text{V}$, $di/dt = 50\text{A}/\mu\text{s}$, $I_r = 10\%$ I_{RM} $T_J = 100^\circ\text{C}$	Q_{rr}	10 25	nC
Typical junction capacitance at 4.0V, 1MHz	C_J	18	pF


Notes: (1) Units mounted on P.C.B. 5.0 x 5.0mm (0.013mm thick) land areas

(2) Pulse test: 300 μs pulse width, 1% duty cycle


Surface Mount Ultrafast Plastic Rectifiers

Ratings and Characteristic Curves (T_A = 25°C unless otherwise noted)


**Fig. 1 – Maximum Forward Current
Derating Curve**

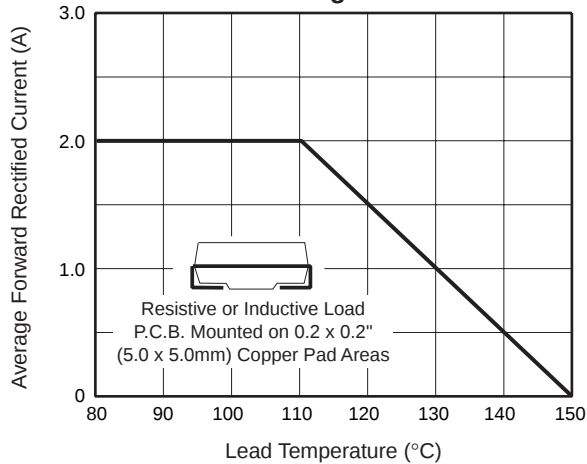

**Fig. 2 – Maximum Non-Repetitive Peak
Forward Surge Current**

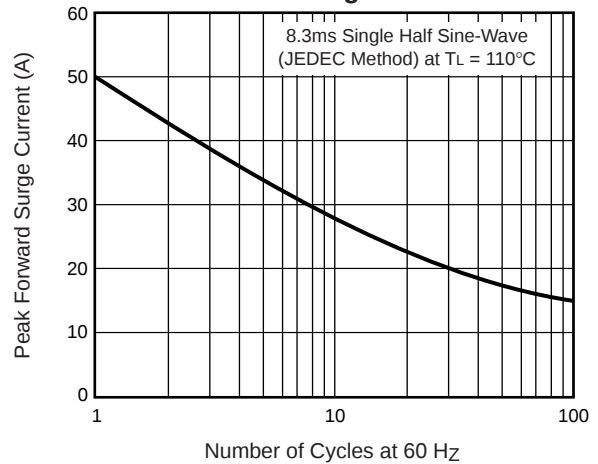

**Fig. 3 – Typical Instantaneous
Forward Characteristics**

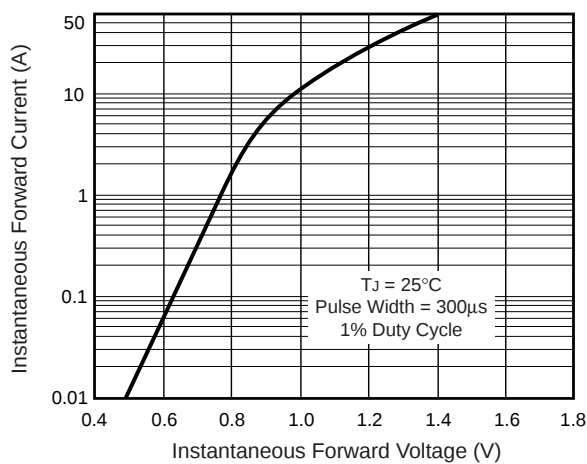

**Fig. 4 – Typical Reverse Leakage
Characteristics**

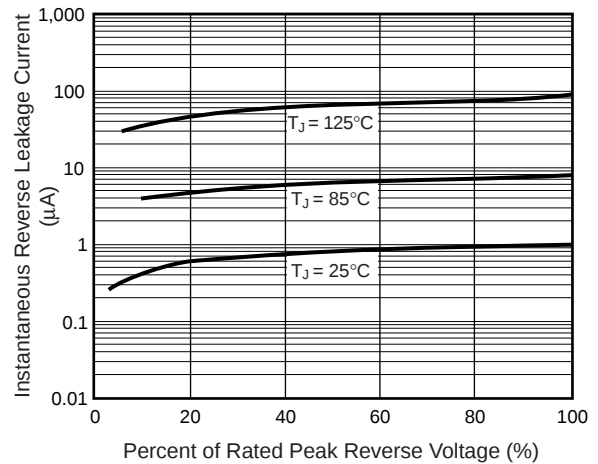


Fig. 5 – Typical Junction Capacitance

