

### Subminiature Relay that Switches up to 5 A

- Subminiature: 20 (L) x 10 (W) x 10 (H) mm.
- Low power consumption: 200 mW.
- Unique moving loop armature reduces relay size, magnetic interference, and contact bounce time.
- Single- and double-winding latching types also available.



### Ordering Information

Contact form	Terminal type	Single-side stable	Single winding latching	Double-winding latching
SPST-NO	Straight PCB	G6B-1114P-US	G6BU-1114P-US	G6BK-1114P-US
	Self-clinching PCB	G6B-1114C-US	G6BU-1114C-US	G6BK-1114C-US
SPST-NO + SPST-NC	Straight PCB	G6B-2114P-US	---	---
	Self-clinching PCB	G6B-2114C-US	---	---
DPST-NO	Straight PCB	G6B-2214P-US	---	---
	Self-clinching PCB	G6B-2214C-US	---	---
DPST-NC	Straight PCB	G6B-2014P-US	---	---
	Self-clinching PCB	G6B-2014C-US	---	---

**Note:** When ordering, add the rated coil voltage to the model number.  
Example: G6B-1114P-US 12 VDC

Rated coil voltage

#### Model Number Legend:

G6B -  -     -   VDC  
 1 2 3 4 5 6 7

#### 1. Relay Function

None: Single-side stable  
 U: Single-winding latching  
 K: Double-winding latching

#### 2. Contact Form

21: SPST-NO + SPST-NC  
 22: DPST-NO  
 20: DPST-NC  
 11: SPST-NO

#### 3. Contact Type

1: Single button  
 7: High-capacity

#### 4. Enclosure Rating

4: Plastic-sealed

#### 5. Terminals

P: Straight PCB  
 C: Self-clinching PCB

#### 6. Approved Standards

US: UL/CSA certified

#### 7. Rated Coil Voltage

5, 6, 12, 24 VDC

## ■ Accessories (Order Separately)

### Back Connecting Sockets

Applicable relay	Back connecting socket*
G6B(U)-1114P-US	P6B-04P
G6BK-1114P-US	P6B-06P
G6B-2□□4P-US-P6B	P6B-26P
G6B-1174P-US	P6B-04P

\*Not applicable to the self-clinching type.

Removal Tool	P6B-Y1
Hold-down Clips	P6B-C2

## Specifications

### ■ Coil Ratings

#### Single-side Stable Type

Item	SPST-NO					SPST-NO + SPST-NC, DPST-NO, DPST-NC				
	3	5	6	12	24	3	5	6	12	24
Rated voltage (VDC)	3	5	6	12	24	3	5	6	12	24
Rated current (mA)	67	40	33.3	16.7	8.3	100	60	50	25	12.5
Coil resistance ( $\Omega$ )	45	125	180	720	2,880	30	83.3	120	480	1,920
Coil inductance (H) (ref. value)	Armature OFF	0.20	0.28	0.31	1.2	4.9	---	---	---	---
	Armature ON	0.18	0.26	0.28	1.1	4.1	---	---	---	---
Must operate voltage	70% max. of rated voltage					80% max. of rated voltage				
Must release voltage	10% min. of rated voltage									
Max. voltage	130% of rated voltage					110% of rated voltage				
Power consumption	Approx. 200 mW					Approx. 300 mW				

#### Single-winding Latching Type

Rated voltage	3 VDC	5 VDC	6 VDC	12 VDC	24 VDC
Rated current	67 mA	40 mA	33.3 mA	16.7 mA	8.3 mA
Coil resistance	45 $\Omega$	125 $\Omega$	180 $\Omega$	720 $\Omega$	2,880 $\Omega$
Coil inductance (H) (ref. value)	Armature OFF	0.20	0.28	0.31	1.2
	Armature ON	0.18	0.26	0.28	1.1
Must operate voltage	70% max. of rated voltage				
Must release voltage	70% min. of rated voltage				
Max. voltage	130% of rated voltage				
Power consumption	Approx. 200 mW				

#### Double-winding Latching Type

Rated voltage	3 VDC	5 VDC	6 VDC	12 VDC	24 VDC	
Set coil	Rated current	93.2 mA	56 mA	46.8 mA	23.3 mA	
	Coil resistance	32.2 $\Omega$	89.2 $\Omega$	128.5 $\Omega$	515 $\Omega$	
	Coil inductance (H) (ref. value)	Armature OFF	0.11	0.15	0.18	0.52
		Armature ON	0.11	0.15	0.18	0.52
Reset coil	Rated current	93.2 mA	56 mA	46.8 mA	23.3 mA	
	Coil resistance	32.2 $\Omega$	89.2 $\Omega$	128.5 $\Omega$	515 $\Omega$	
	Coil inductance (H) (ref. value)	Armature OFF	0.11	0.15	0.18	0.52
		Armature ON	0.11	0.15	0.18	0.52
Must set voltage	70% max. of rated voltage					
Must reset voltage	70% min. of rated voltage					
Maximum voltage	130% of rated voltage					
Power consumption	Set coil: Approx. 280 mW Reset coil: Approx. 280 mW					

**Note:** 1. The rated current and coil resistance are measured at a coil temperature of 23°C with a tolerance of  $\pm 10\%$ .  
2. Operating characteristics are measured at a coil temperature of 23°C.

## ■ Contact Ratings

Item	SPST-NO		SPST-NO + SPST-NC, DPST-NO, DPST-NC	
	Resistive load ( $\cos\phi = 1$ )	Inductive load ( $\cos\phi = 0.4$ ; L/R = 7 ms)	Resistive load ( $\cos\phi = 1$ )	Inductive load ( $\cos\phi = 0.4$ ; L/R = 7 ms)
Rated load	5 A at 250 VAC; 5A at 30 VDC	2 A at 250 VAC; 2 A at 30 VDC	5 A at 250 VAC; 5A at 30 VDC	1.5 A at 250 VAC; 1.5 A at 30 VDC
Contact material	AgCdO			
Rated carry current	5 A			
Max. switching voltage	380 VAC, 125 VDC			
Max. switching current	5 A			
Max. switching capacity	1,250 VA, 150 W	500 VA, 60 W	1,250 VA, 150 W	375 VA, 80 W
Min. permissible load <sup>0</sup>	10 mA at 5 VDC			

Item	SPST-NO (High-capacity)	
Load	Resistive load ( $\cos\phi = 1$ )	Inductive load ( $\cos\phi = 0.4$ ; L/R = 7 ms)
Rated load	8 A at 250 VAC; 5A at 30 VDC	2 A at 250 VAC; 2 A at 30 VDC
Contact material	AgCdO	
Rated carry current	8 A	
Max. switching voltage	380 VAC, 125 VDC	
Max. switching current	8 A	
Max. switching capacity	2,000 VA, 150 W	
Min. permissible load <sup>0</sup>	10 mA at 5 VDC	

Note: P level:  $\lambda_{60} = 0.1 \times 10^{-6}$ /operation

## ■ Characteristics

Contact resistance	30 m $\Omega$ max.
Operate (set) time	10 ms max. (mean value: 1-pole approx. 3 ms, 2-pole approx. 4 ms)
Release (reset) time	Single-side stable types: 10 ms max. (mean value: 1-pole approx. 1 ms, 2-pole approx. 2 ms) Latching types: 10 ms max. (mean value: approx. 3 ms)
Min. set/reset signal width	Latching type: 15 ms min. (at 23°C)
Max. operating frequency	Mechanical: 18,000 operations/hr Electrical: 1,800 operations/hr (under rated load)
Insulation resistance	1,000 M $\Omega$ min. (at 500 VDC)
Dielectric strength	3,000 VAC (Latching types: 2,000 VAC), 50/60 Hz for 1 min between coil and contacts 1,000 VAC, 50/60 Hz for 1 min between contacts of same polarity 250 VAC, 50/60 Hz for 1 min between set and reset coils 2,000 VAC, 50/60 Hz for 1 min between contacts of different polarity
Vibration resistance	Destruction: 10 to 55 Hz, 1.5-mm double amplitude Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance	Destruction: 1,000 m/s <sup>2</sup> (approx. 100G) Malfunction: Single-side stable: 100 m/s <sup>2</sup> (approx. 10G); Latching: 300 m/s <sup>2</sup> (approx. 30G)
Life expectancy	Mechanical: 50,000,000 operations min. (at 18,000 operations/hr) Electrical: 100,000 operation min. (at 1,800 operations/hr)
Ambient temperature	Operating: -25°C to 70°C (with no icing) Storage: -25°C to 70°C (with no icing)
Ambient humidity	Operating: 45% to 85% Storage: 45% to 85%
Weight	Double-winding latching: Approx. 3.7 g High-capacity: Approx. 4.6 g Double pole: Approx. 4.5 g Other: Approx. 3.5 g

Note: The data shown above are initial value

### ■ Approved Standards


UL508 (File No. E41643)/CSA C22.2 No.14 (File No. LR31928)

Model	Contact form	Coil rating	Contact rating
G6B-1114P-US G6B-1114C-US G6BU-1114P-US G6BU-1114C-US G6BK-1114P-US G6BK-1114C-US G6B-1114P-US G6B-1114C-US G6BU-1114P-US G6BU-1114C-US G6BK-1114P-US G6BK-1114C-US	SPST-NO	3 to 24 VDC	5 A, 250 VAC (general use) 5 A, 30 VDC (resistive load)
G6B-1174P-US G6B-1174C-US			8 A, 250 VAC (general use) 8 A, 30 VDC (resistive load)
G6B-2114P-US G6B-2114C-US G6B-2214P-US G6B-2214C-US G6B-2014P-US G6B-2014C-US	SPST-NO + SPST-NC DPST-NO DPST-NC		5 A, 250 VAC (general use) 5 A, 30 VDC (resistive load)


# Engineering Data

## G6B-1114P-US


### Max. Switching Capacity

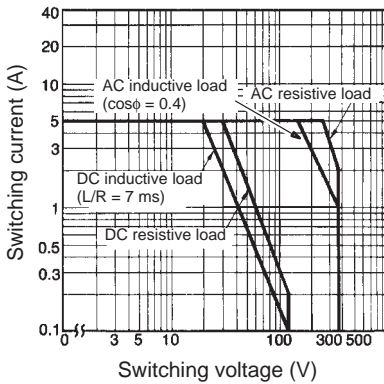

### Life Expectancy

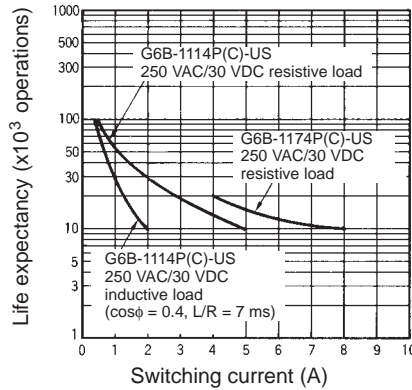


### Ambient Temperature vs. Maximum Voltage

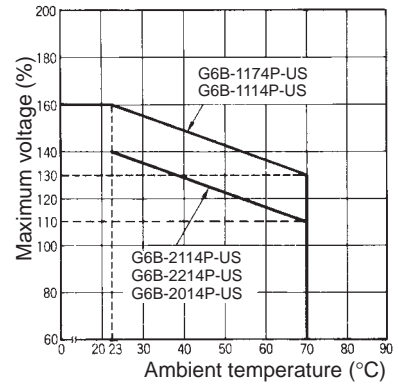


**Note:** The maximum voltage refers to the maximum value in a varying range of operating power voltage, not a continuous voltage.

## G6B-2114P-US, G6B-2214P-US, G6B-2014P-US

### Max. Switching Capacity

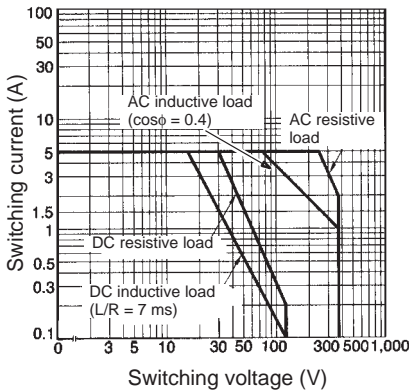

### Life Expectancy


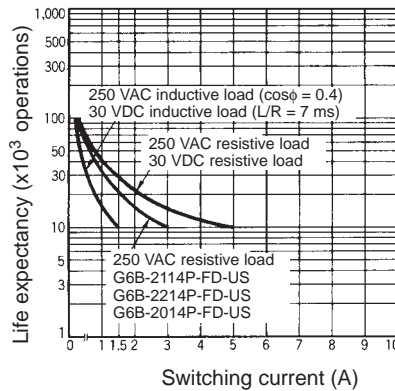


# Dimensions


**Note:** 1. All units are in millimeters unless otherwise indicated.

2. Orientation marks are indicated as follows:  


## G6B-1114P-US G6BU-1114P-US

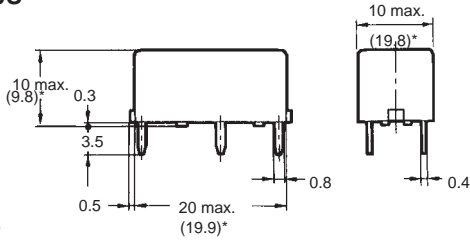



**Terminal Arrangement/Internal Connections (Bottom View)**  
G6B-1114P, -1114C




**Mounting Holes (Bottom View)**  
G6B-1114P, -1114C  
G6BU-1114P, -1114C





\*Average value  
**G6B-1114C-US  
G6BU-1114C-US**

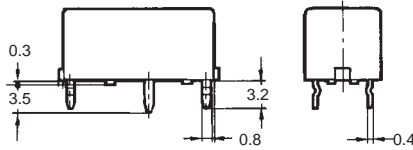


**G6BU-1114P, -1114C**




## G6BK-1114P-US

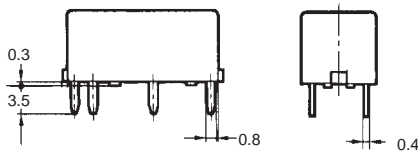



**Terminal Arrangement/Internal Connections (Bottom View)**  
G6BK-1114P, -1114C





**Mounting Holes (Bottom View)**  
G6BK-1114P, -1114C




## G6BK-1114C-US

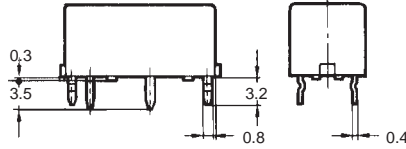


## G6B-1174P-US

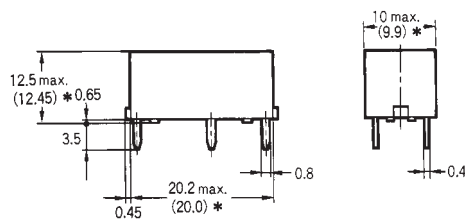



**Terminal Arrangement/Internal Connections (Bottom View)**  
G6B-1174P, -1174C



**Mounting Holes (Bottom View)**




\*Average value  
**G6B-1174C-US**


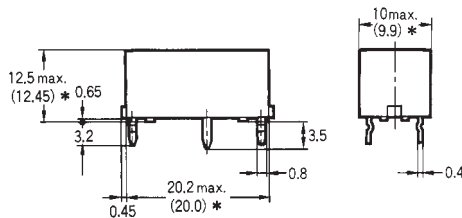



\*Average value

**G6B-2114P-US  
G6B-2214P-US  
G6B-2014P-US**




\*Average value




**Terminal Arrangement/Internal Connections (Bottom View)**


**G6B-2114P-US**



**G6B-2214P-US**




**G6B-2014P-US**




**Mounting Holes (Bottom View)**




Tolerance:  $\pm 0.1$

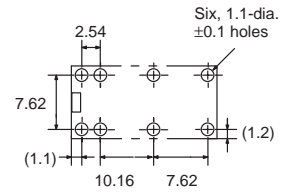

**G6B-2114C-US  
G6B-2214C-US  
G6B-2014C-US**




\*Average value




**Terminal Arrangement/Internal Connections (Bottom View)**


**G6B-2114C-US**



**G6B-2214C-US**




**G6B-2014C-US**




**Mounting Holes (Bottom View)**



Tolerance:  $\pm 0.1$



**Back Connecting Socket**




\*Average value

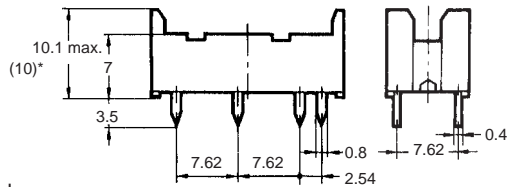


**Mounting Holes (Bottom View)**


**P6B-04P**

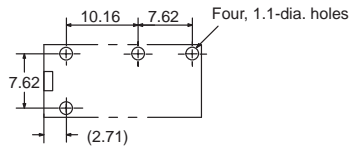


**P6B-06P**

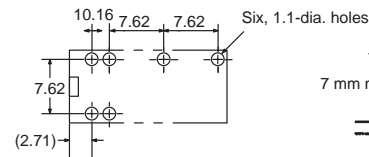


**Mounting Height**

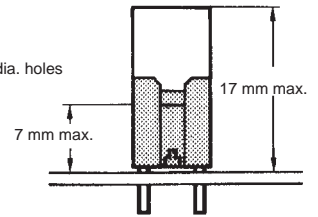

**Removal Tool  
P6B-Y1**



**Hold-down Clips  
P6B-C2**



**ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.**

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.