


High Voltage BIMOSFET™ Monolithic Bipolar MOS Transistor


N-Channel, Enhancement Mode

IXBH 15N140
IXBH 15N160

$V_{CES} = 1400/1600\text{ V}$
 $I_{C25} = 15\text{ A}$
 $V_{CE(sat)} = 5.8\text{ V typ.}$
 $t_{fi} = 40\text{ ns}$



TO-247 AD



G = Gate,
E = Emitter,

C = Collector,
TAB = Collector

Symbol	Conditions	Maximum Ratings	
		15N140	15N160
V_{CES}	$T_J = 25^\circ\text{C to } 150^\circ\text{C}$	1400	1600 V
V_{CGR}	$T_J = 25^\circ\text{C to } 150^\circ\text{C}; R_{GE} = 1\text{ M}\Omega$	1400	1600 V
V_{GES}	Continuous	± 20 V	
V_{GEM}	Transient	± 30 V	
I_{C25}	$T_C = 25^\circ\text{C}$	15 A	
I_{C90}	$T_C = 90^\circ\text{C}$	9 A	
I_{CM}	$T_C = 25^\circ\text{C}, 1\text{ ms}$	18 A	
SSOA (RBSOA)	$V_{GE} = 15\text{ V}, T_{VJ} = 125^\circ\text{C}, R_G = 47\text{ }\Omega, V_{CE} = 0.8 \cdot V_{CES}$ Clamped inductive load, $L = 100\text{ }\mu\text{H}$	$I_{CM} = 18$ A	
P_C	$T_C = 25^\circ\text{C}$	150 W	
T_J		$-55 \dots +150$ °C	
T_{JM}		150 °C	
T_{stg}		$-55 \dots +150$ °C	
T_L	1.6 mm (0.063 in) from case for 10 s	300 °C	
M_d	Mounting torque	1.15/10 Nm/lb.in.	
Weight		6 g	

Features

- International standard package JEDEC TO-247 AD
- High Voltage BIMOSFET™
 - replaces high voltage Darlington's and series connected MOSFETs
 - lower effective $R_{DS(on)}$
- Monolithic construction
 - high blocking voltage capability
 - very fast turn-off characteristics
- MOS Gate turn-on
 - drive simplicity
- Reverse conducting capability

Applications

- Flyback converters
- DC choppers
- Uninterruptible power supplies (UPS)
- Switched-mode and resonant-mode power supplies
- CRT deflection
- Lamp ballasts

Symbol	Conditions	Characteristic Values (T _j = 25°C, unless otherwise specified)			
			min.	typ.	max.
BV _{CES}	I _C = 1 mA, V _{GE} = 0 V	15N140	1400		V
		15N160	1600		V
V _{GE(th)}	I _C = 1 mA, V _{CE} = V _{GE}		4		8 V
I _{CES}	V _{CE} = 0.8 • V _{CES}	T _j = 25°C		0.1	100 μA
	V _{GE} = 0 V	T _j = 125°C			mA
I _{GES}	V _{CE} = 0 V, V _{GE} = ±20 V				± 500 nA
V _{CE(sat)}	I _C = I _{C90} , V _{GE} = 15 V	T _j = 125°C		5.8	7.0 V
				7.7	V


Advantages

- Easy to mount with 1 screw (isolated mounting screw hole)
- Space savings
- High power density

Symbol	Conditions	Characteristic Values ($T_j = 25^\circ\text{C}$, unless otherwise specified)		
		min.	typ.	max.
C_{ies}	$V_{CE} = 25\text{ V}, V_{GE} = 0\text{ V}, f = 1\text{ MHz}$		1200	pF
C_{oes}			80	pF
C_{res}			11	pF
Q_g	$I_C = 9\text{ A}, V_{CE} = 600\text{ V}, V_{GE} = 15\text{ V}$		45	nC
$t_{d(on)}$	Inductive load, $T_j = 125^\circ\text{C}$ $I_C = I_{C90}, V_{GE} = 15\text{ V}, L = 100\text{ }\mu\text{H},$ $V_{CE} = 960\text{ V}, R_G = 47\text{ }\Omega$		200	ns
t_{ri}			60	ns
$t_{d(off)}$			180	ns
t_{fi}			40	ns
R_{thJC}				0.83 K/W
R_{thCK}		0.25		K/W

Reverse Conduction		Characteristic Values ($T_j = 25^\circ\text{C}$, unless otherwise specified)		
Symbol	Conditions	min.	typ.	max.
V_F	$I_F = I_{C90}, V_{GE} = 0\text{ V}$		3.8	5 V

TO-247 AD Outline



Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	19.81	20.32	0.780	0.800
B	20.80	21.46	0.819	0.845
C	15.75	16.26	0.610	0.640
D	3.55	3.65	0.140	0.144
E	4.32	5.49	0.170	0.216
F	5.4	6.2	0.212	0.244
G	1.65	2.13	0.065	0.084
H	-	4.5	-	0.177
J	1.0	1.4	0.040	0.055
K	10.8	11.0	0.426	0.433
L	4.7	5.3	0.185	0.209
M	0.4	0.8	0.016	0.031
N	1.5	2.49	0.087	0.102

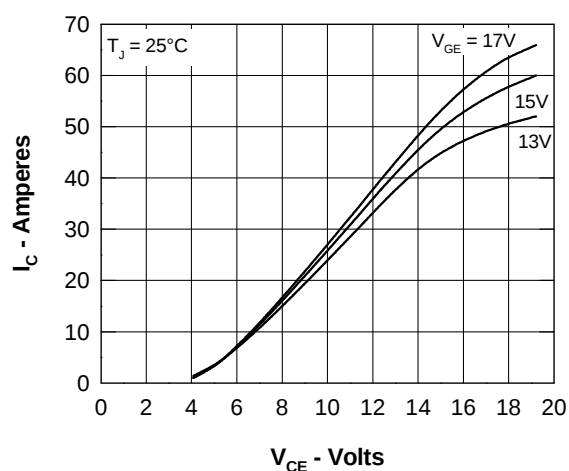


Fig. 1 Typ. Output Characteristics

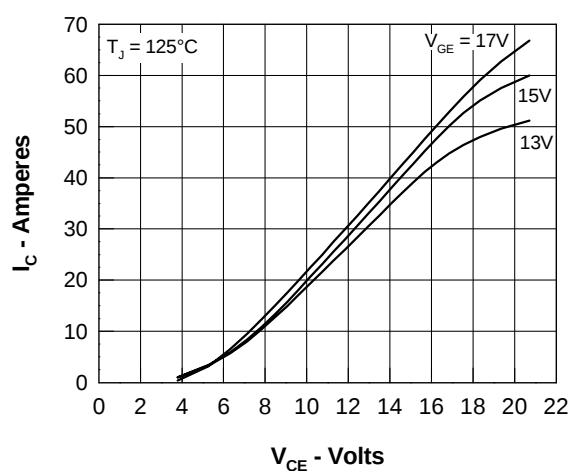


Fig. 2 Typ. Output Characteristics

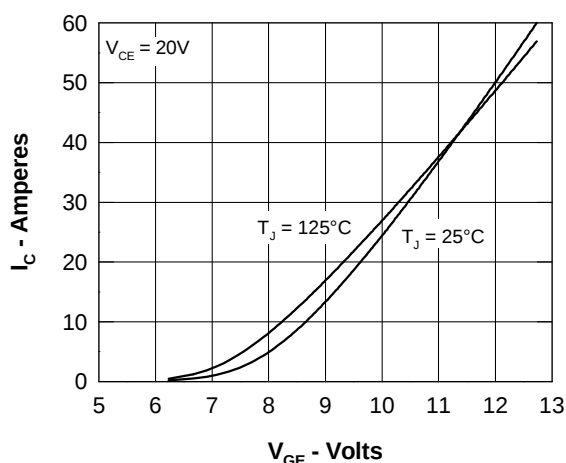


Fig. 3 Typ. Transfer Characteristics

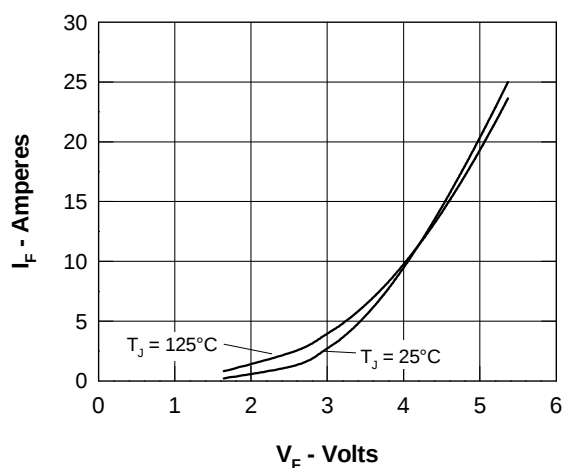


Fig. 4 Typ. Characteristics of Reverse Conduction

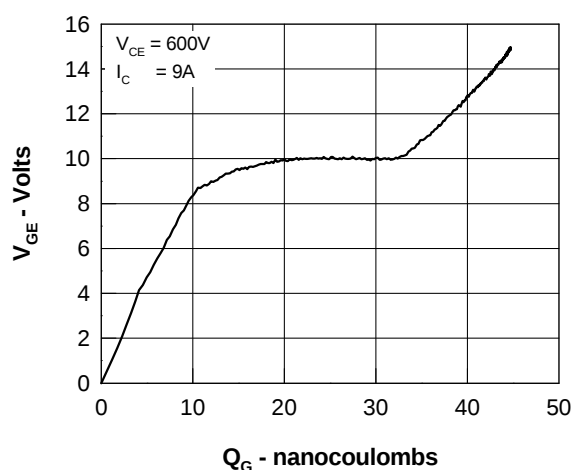


Fig. 5 Typ. Gate Charge characteristics

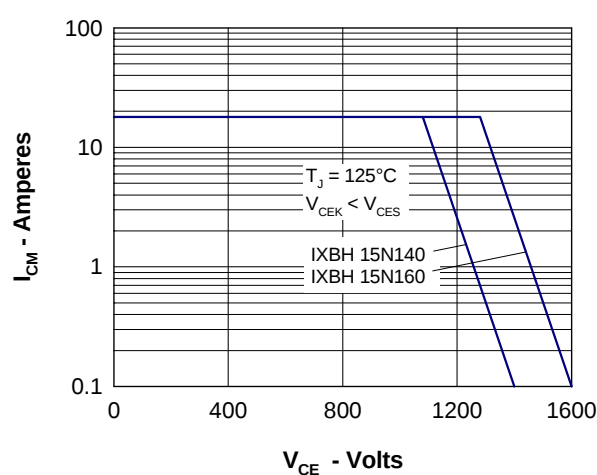


Fig. 6 Reverse Biased Safe Operating Area RBSOA

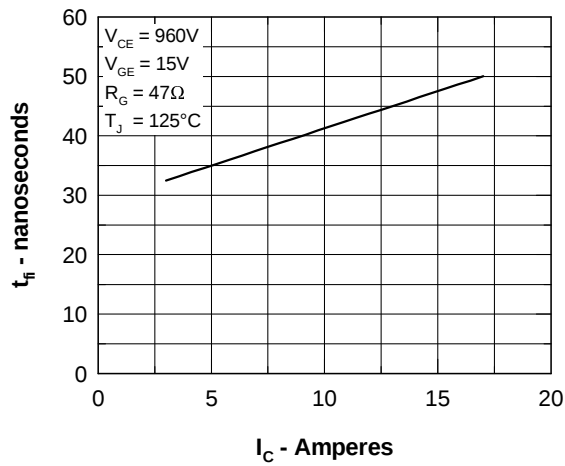


Fig. 7 Typ. Fall Time

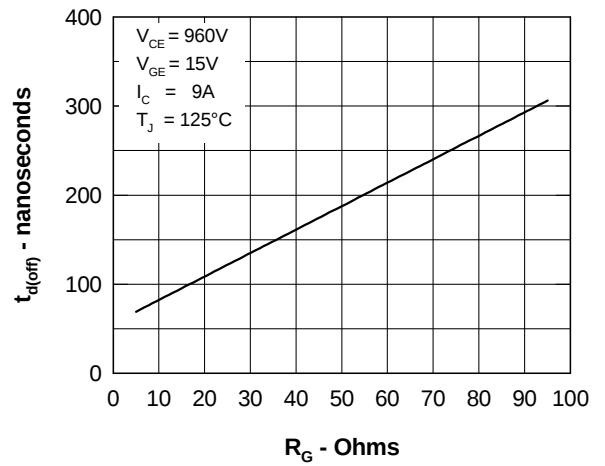


Fig. 8 Typ. Turn Off Delay Time

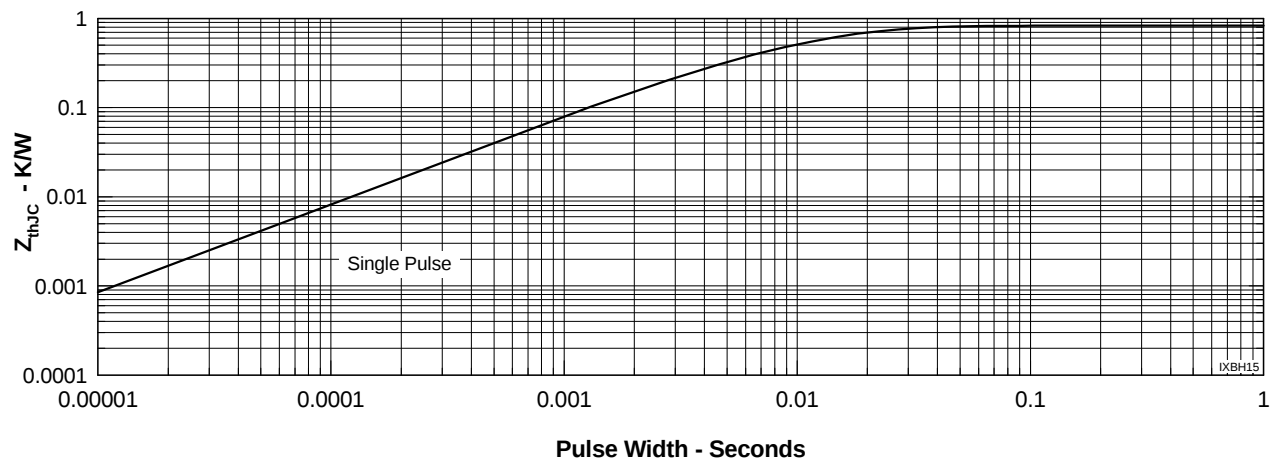


Fig. 9 Typ. Transient Thermal Impedance