

QUAD TIMER

The KA558B/I series are monolithic Quad Timers which can be used to produce four entirely independent timing functions. These highly stable, general purpose controllers can be used in a monostable mode to produce accurate time delays, from microseconds to hours. The time is precisely controlled by one external resistor and one capacitor in the time delay mode. A stable mode can be operated using two of four time sections.

FEATURES

- Wide Supply Voltage Range: 4.5V To 16V
- 100 mA Output Current Per Section
- Edge Triggered Without Coupling Capacitor
- Time Period Equals RC
- Output independent Of Trigger Conditions


APPLICATIONS

- Quad One-Shot
- Sequential Timing
- Precision Timing
- Time Delay Generation

ORDERING INFORMATION

Device	Package	Operating Temperature
KA558B	16 DIP	0 ~ + 70 °C
KA558BI	16 DIP	- 40 ~ + 85 °C
KA558D	16 - SOP - 225	0 ~ + 70 °C
KA558DI	16 - SOP - 300	0 ~ + 70 °C

BLOCK DIAGRAM

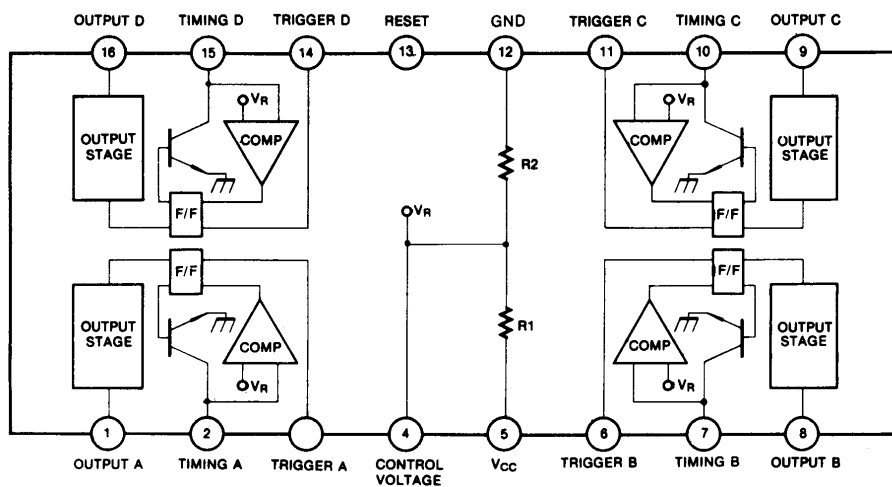

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$)

Characteristic	Symbol	Value	Unit
Supply Voltage	V_{CC}	16	V
Lead Temperature (soldering 10sec)	T_{LEAD}	300	$^\circ\text{C}$
Power Dissipation	P_D	600	mW
Operating Temperature Range KA558B	T_{OPR}	0 ~ + 70	$^\circ\text{C}$
KA558B/I		-40 ~ + 85	$^\circ\text{C}$
Storage Temperature Range	T_{STG}	-65 ~ + 150	$^\circ\text{C}$

ELECTRICAL CHARACTERISTICS

($V_{CC} = 5 \sim 15\text{V}$, $T_A = 25^\circ\text{C}$, unless otherwise specified)

Characteristic	Symbol	Test Conditions	Min	Typ	Max	Unit
Supply Voltage	V_{CC}		4.5		16	V
Supply Current	I_{CC}	$V_{CC} = 15\text{V}$, reset voltage = 15V		16	36	mA
Timing Error ($T = RC$) Initial Accuracy	ACCUR	$R = 2\text{K}\Omega$ to $100\text{K}\Omega$, $C = 1\mu\text{F}$		± 2	5	%
Drift with Temperature	$\Delta t/\Delta T$			30	150	PPM/ $^\circ\text{C}$
Drift with Supply Voltage	$\Delta t/\Delta V_{CC}$			0.1	0.9	%/V
¹ Trigger Voltage	V_{TR}	$V_{CC} = 15\text{V}$		1.5	2.4	V
¹ Trigger Current	I_{TR}	Trigger voltage = 0V		5.0	100	μA
² Reset Voltage	V_{RST}	Reset	0.8	1.5	2.4	V
² Reset Current	I_{RST}	Reset		50	500	μA
Threshold Voltage	V_{TH}		0.8	$0.63 \times V_{CC}$		V
Threshold Current	I_{TH}			15		nA
³ Output Voltage	V_O	$I_L = 10\text{mA}$		0.1	0.4	V
		$I_L = 100\text{mA}$		1.0	2.0	
Output Leakage Current	I_{LKG}			10	500	nA
Propagation Delay Time	t_D			1.0		μS
Rise Time	t_R	$I_L = 100\text{mA}$		100		nS
Fall Time	t_F	$I_L = 100\text{mA}$		100		nS

NOTES: 1. The trigger functions only on the falling edge of the trigger pulse only after previously being high. After reset the trigger must be brought high and then low to implement triggering.

2. For reset below 0.8V, outputs set low and trigger inhibited.

3. Output structure is open collector which requires a pull up resistor to V_{CC} to sink current.
The output is normally low sinking current.

TRADEMARKS

The following are registered and unregistered trademarks Fairchild Semiconductor owns or is authorized to use and is not intended to be an exhaustive list of all such trademarks.

ACE ^x ™	ISOPLANAR™	UHC™
CoolFET™	MICROWIRE™	VCX™
CROSSVOLT™	POP™	
E ² CMOS™	PowerTrench™	
FACT™	QS™	
FACT Quiet Series™	Quiet Series™	
FAST®	SuperSOT™-3	
FAST ^r ™	SuperSOT™-6	
GTO™	SuperSOT™-8	
HiSeC™	TinyLogic™	

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, or (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

PRODUCT STATUS DEFINITIONS

Definition of Terms

Datasheet Identification	Product Status	Definition
Advance Information	Formative or In Design	This datasheet contains the design specifications for product development. Specifications may change in any manner without notice.
Preliminary	First Production	This datasheet contains preliminary data, and supplementary data will be published at a later date. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
No Identification Needed	Full Production	This datasheet contains final specifications. Fairchild Semiconductor reserves the right to make changes at any time without notice in order to improve design.
Obsolete	Not In Production	This datasheet contains specifications on a product that has been discontinued by Fairchild semiconductor. The datasheet is printed for reference information only.