

PK(PD,PE,KK)130F





UL:E76102(M)

Power Thyristor/Diode Module **PK130F** series are designed for various rectifier circuits and power controls. For your circuit application, following internal connections and wide voltage ratings up to 1,600V are available. Two elements in a package and electrically isolated mounting base make your mechanical design easy.

- $I_{T(AV)}$ 130A, $I_{T(RMS)}$ 205A, I_{TSM} 4400A
- di/dt 200 A/ μ s
- dv/dt 500V/ μ s

(Applications)

- Various rectifiers
- AC/DC motor drives
- Heater controls
- Light dimmers
- Static switches

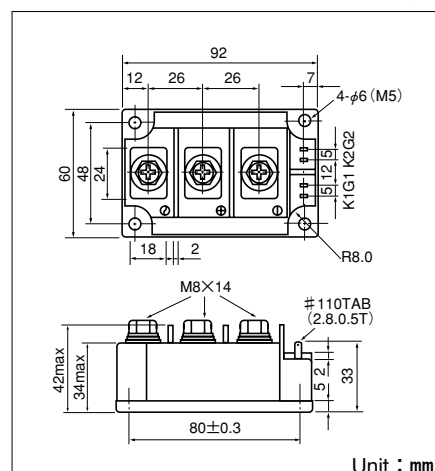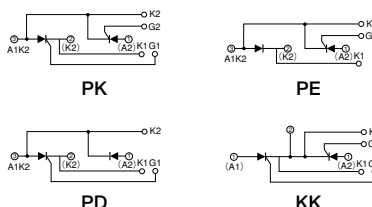

■ Maximum Ratings

Symbol	Item	Ratings				Unit
		PK130F40	PK130F80	PK130F120	PK130F160	
		PD130F40	PD130F80	PD130F120	PD130F160	
		PE130F40	PE130F80	PE130F120	PE130F160	
		KK130F40	KK130F80	KK130F120	KK130F160	
V _{RRM}	* Repetitive Peak Reverse Voltage	400	800	1200	1600	V
V _{RSM}	* Non-Repetitive Peak Reverse Voltage	480	960	1300	1700	V
V _{DRM}	Repetitive Peak Off-State Voltage	400	800	1200	1600	V

Symbol	Item		Conditions	Ratings	Unit
$I_T(AV)$	* Average On-State Current		Single phase, half wave, 180° conduction, $T_c : 90^{\circ}C$	130	A
$I_T(RMS)$	* R.M.S. On-State Current		Single phase, half wave, 180° conduction, $T_c : 90^{\circ}C$	205	A
I_{TSM}	* Surge On-State Current		$\frac{1}{2}$ cycle, 50Hz/60Hz, peak Value, non-repetitive	4000/4400	A
I^2t	* I^2t		Value for one cycle of surge current	8×10^4	A^2S
P_{GM}	Peak Gate Power Dissipation			10	W
$P_{G(AV)}$	Average Gate Power Dissipation			3	W
I_{FGM}	Peak Gate Current			3	A
V_{FGM}	Peak Gate Voltage (Forward)			10	V
V_{RGM}	Peak Gate Voltage (Reverse)			5	V
di/dt	Critical Rate of Rise of On-State Current		$I_G=100mA, T_j=25^{\circ}C, V_D=\frac{1}{2}V_{DRM}, dI_G/dt=0.1A/\mu s$	200	$A/\mu s$
V_{ISO}	* Isolation Breakdown Voltage (R.M.S.)		A.C.1minute	2500	V
T_j	* Operating Junction Temperature			-40 to +125	$^{\circ}C$
T_{stg}	* Storage Temperature			-40 to +125	$^{\circ}C$
	Mounting Torque	Mounting (M5)	Recommended 1.5-2.5 (15-25)	2.7 (28)	N·m (kgf·cm)
		Terminal (M8)	Recommended 8.8-10 (90-105)	11 (115)	
	Mass			510	g

■Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
IDRM	Repetitive Peak Off-State Current, max.	at V_{DRM} , single phase, half wave, $T_J=125^{\circ}\text{C}$	50	mA
IRRM	* Repetitive Peak Reverse Current, max.	at V_{DRM} , single phase, half wave, $T_J=125^{\circ}\text{C}$	50	mA
V_{TM}	* Peak On-State Voltage, max.	On-State Current 400A, $T_J=25^{\circ}\text{C}$ Inst. measurement	1.40	V
I_{GT}/V_{GT}	Gate Trigger Current/Voltage, max.	$T_J=25^{\circ}\text{C}$, $I_T=1\text{A}$, $V_D=6\text{V}$	100/3	mA/V
V_{GD}	Non-Trigger Gate, Voltage. min.	$T_J=125^{\circ}\text{C}$, $V_D=\frac{1}{2}V_{DRM}$	0.25	V
tgt	Turn On Time, max.	$I_T=130\text{A}$, $I_G=100\text{mA}$, $T_J=25^{\circ}\text{C}$, $V_D=\frac{1}{2}V_{DRM}$, $di_G/dt=0.1\text{A}/\mu\text{s}$	10	μs
dv/dt	Critical Rate of Rise of Off-State Voltage, min.	$T_J=125^{\circ}\text{C}$, $V_D=\frac{2}{3}V_{DRM}$, Exponential wave.	500	$\text{V}/\mu\text{s}$
I_H	Holding Current, typ.	$T_J=25^{\circ}\text{C}$	50	mA
I_L	Lutching Current, typ.	$T_J=25^{\circ}\text{C}$	100	mA
$R_{th}(j-c)$	* Thermal Impedance. max.	Junction to case	0.2	$^{\circ}\text{C}/\text{W}$

* mark : Thyristor and Diode part. No mark : Thyristor part

