

**QUAD 2 CHANNEL MULTIPLEXER/REGISTER**




- HIGH SPEED  
f<sub>MAX</sub> = 73 MHz (typ.) AT V<sub>CC</sub> = 5 V
- LOW POWER DISSIPATION  
I<sub>CC</sub> = 4 μA (MAX.) AT T<sub>A</sub> = 25 °C
- HIGH NOISE IMMUNITY  
V<sub>NIH</sub> = V<sub>NIL</sub> = 28 % V<sub>CC</sub> (MIN.)
- OUTPUT DRIVE CAPABILITY  
10 LSTTL LOADS  
|I<sub>OH</sub>| = I<sub>OL</sub> = 4 mA (MIN.)
- SYMMETRICAL OUTPUT IMPEDANCE  
t<sub>PLH</sub> = t<sub>PHL</sub>
- WIDE OPERATING VOLTAGE RANGE  
V<sub>CC</sub> (OPR) = 2 V TO 6 V
- PIN AND FUNCTION COMPATIBLE  
WITH 54/74LS298

**DESCRIPTION**

The M54/74HC298 is a high speed CMOS QUAD 2-CHANNEL MULTIPLEXER/REGISTER fabricated in silicon gate C<sup>2</sup>MOS technology.

It has the same high speed performance of LSTTL combined with true CMOS low power consumption. These circuits are controlled by the signals WORD SELECT and CLOCK. When the WORD SELECT input is taken low Word 1 (A1, B1, C1 and D1) is presented to the input of the flip-flops, and when WORD SELECT is high Word 2 (A2, B2, C2 and D2) is presented to the inputs of the flip-flops. The select word is clocked to the output terminals on the negative edge of the clock pulse. All inputs are equipped with protection circuits against static discharge and transient excess voltage.

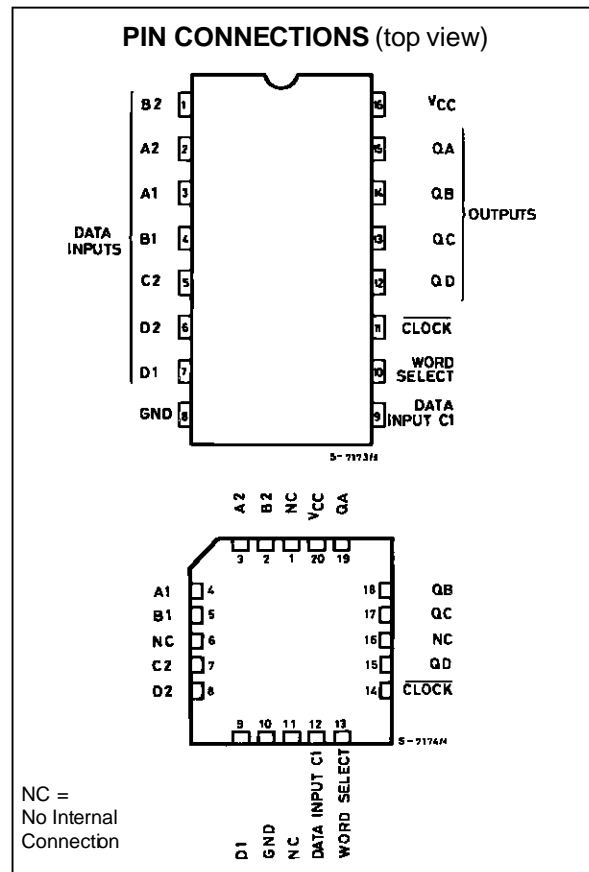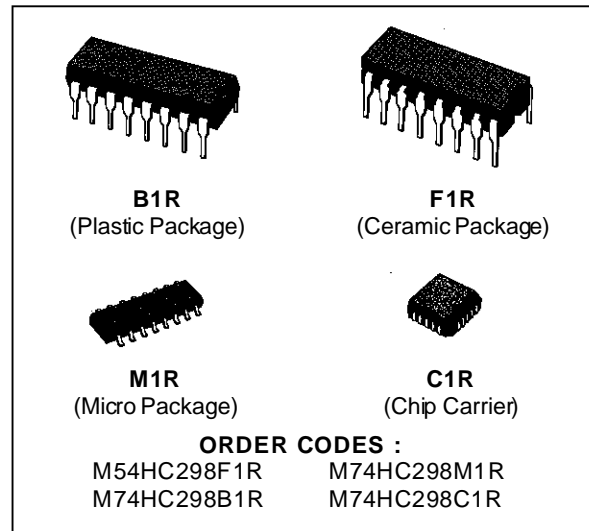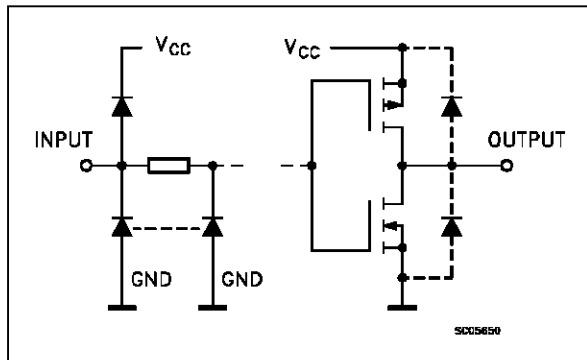


**INPUT AND OUTPUT EQUIVALENT CIRCUIT**



NC =  
No Internal  
Connection

# M54/M74HC298

## TRUTH TABLE


| INPUTS      |   | OUTPUTS |     |     |     |
|-------------|---|---------|-----|-----|-----|
| WORD SELECT | CLOCK   | QA      | QB  | QC  | QD  |
| L           |  | a1      | b1  | c1  | d1  |
| H           |  | a2      | b2  | c2  | d2  |
| X           |  | QA0     | QB0 | QC0 | QD0 |

X : DON'T CARE (INCLUDING TRANSITION)

a1, a2, ETC : THE LEVEL OF STEAY STATE INPUT AT a1, a2, etc.

QA0, QB0, ETC : THE LEVEL OF QA, QB, ETC ENTERED ON THE MOST RECENT NEGATIVE TRANSITION OF THE CLOCK INPUT.


## LOGIC DIAGRAM

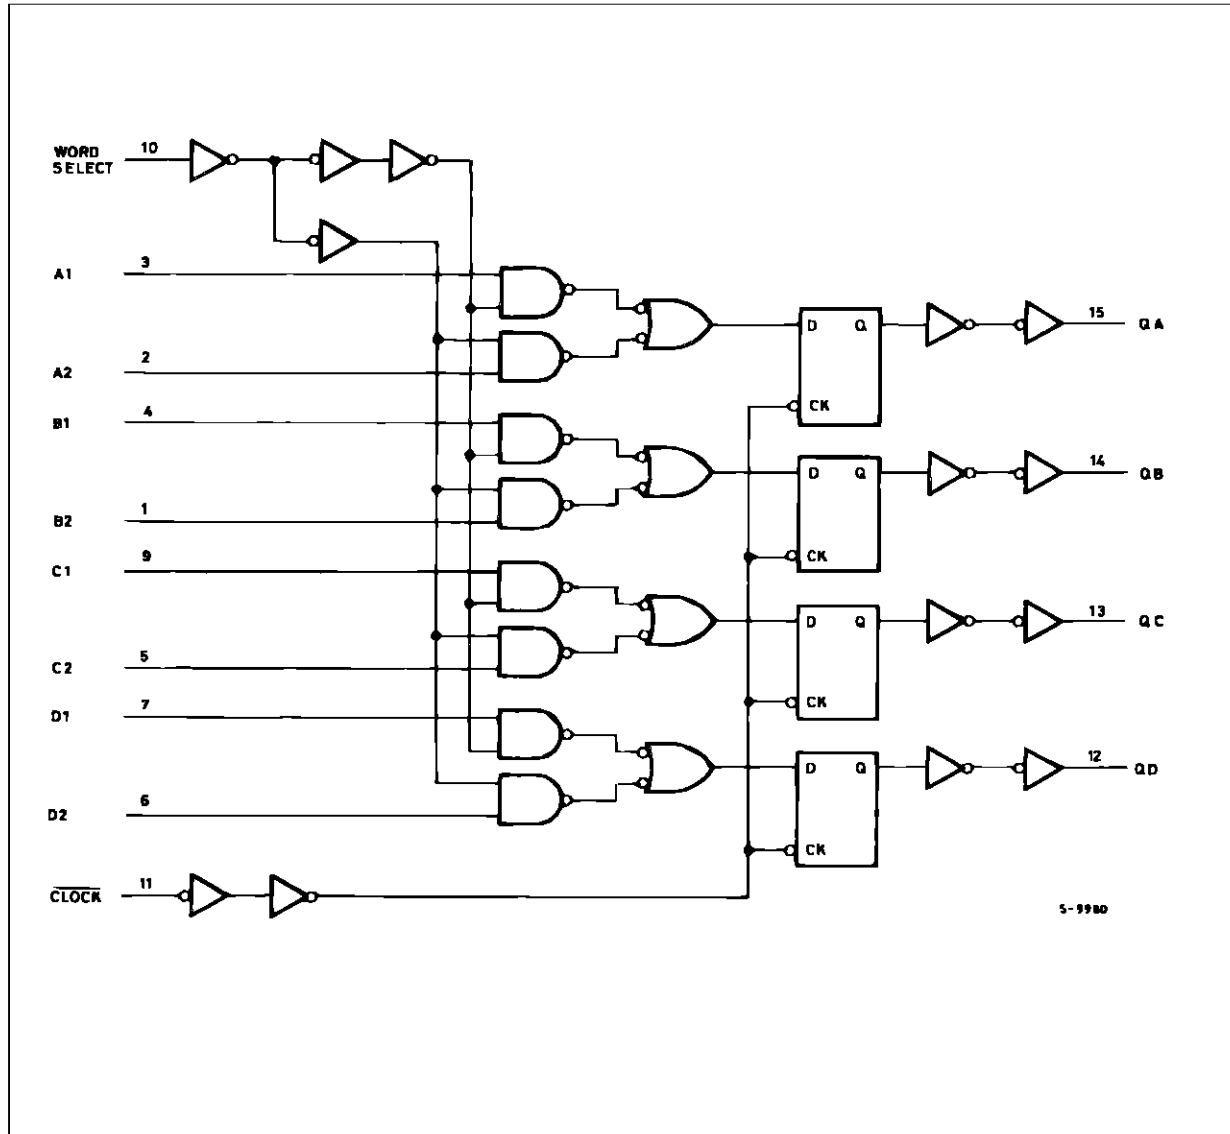

**PIN DESCRIPTION**

| PIN No     | SYMBOL          | NAME AND FUNCTION                         |
|------------|-----------------|---|
| 1, 2, 5, 6 | A2, B2, C2, D2  | Word 2 Data Inputs                        |
| 3, 4, 7, 9 | A1, B1, C1, D1  | Word 1 Data Inputs                        |
| 12 to 15   | QA to QD        | Outputs                                   |
| 10         | WORD SELECT     | Word Select Input                         |
| 11         | CLOCK           | Clock Input (HIGH to LOW, Edge-triggered) |
| 8          | GND             | Ground (0V)                               |
| 16         | V <sub>CC</sub> | Positive Supply Voltage                   |

**IEC LOGIC SYMBOL**

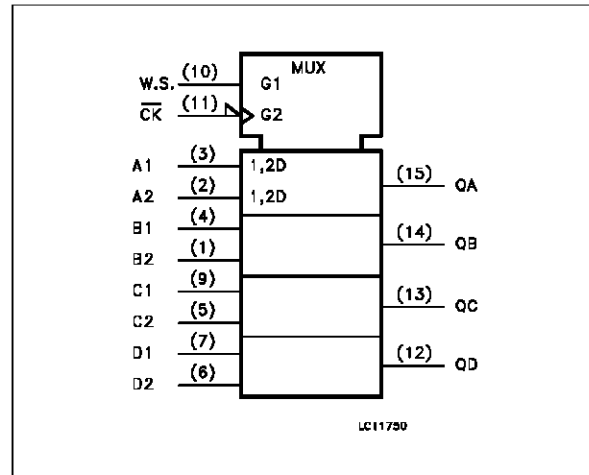

**ABSOLUTE MAXIMUM RATINGS**

| Symbol                              | Parameter                                    | Value                         | Unit |
|-------------------------------------|--|-------------------------------|------|
| V <sub>CC</sub>                     | Supply Voltage                               | -0.5 to +7                    | V    |
| V <sub>I</sub>                      | DC Input Voltage                             | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| V <sub>O</sub>                      | DC Output Voltage                            | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>                     | DC Input Diode Current                       | ± 20                          | mA   |
| I <sub>OK</sub>                     | DC Output Diode Current                      | ± 20                          | mA   |
| I <sub>O</sub>                      | DC Output Source Sink Current Per Output Pin | ± 25                          | mA   |
| I <sub>CC</sub> or I <sub>GND</sub> | DC V <sub>CC</sub> or Ground Current         | ± 50                          | mA   |
| P <sub>D</sub>                      | Power Dissipation                            | 500 (*)                       | mW   |
| T <sub>stg</sub>                    | Storage Temperature                          | -65 to +150                   | °C   |
| T <sub>L</sub>                      | Lead Temperature (10 sec)                    | 300                           | °C   |

Absolute Maximum Ratings are those values beyond which damage to the device may occur. Functional operation under these condition is not implied.  
 (\*) 500 mW: ≅ 65 °C derate to 300 mW by 10mW/°C: 65 °C to 85 °C

**RECOMMENDED OPERATING CONDITIONS**

| Symbol                          | Parameter   | Value   | Unit                              |    |
|---------------------------------|---|---|-----------------------------------|----|
| V <sub>CC</sub>                 | Supply Voltage  | 2 to 6  | V                                 |    |
| V <sub>I</sub>                  | Input Voltage   | 0 to V <sub>CC</sub>  | V                                 |    |
| V <sub>O</sub>                  | Output Voltage  | 0 to V <sub>CC</sub>  | V                                 |    |
| T <sub>op</sub>                 | Operating Temperature: <b>M54HC Series</b><br><b>M74HC Series</b> | -55 to +125<br>-40 to +85   | °C<br>°C                          |    |
| t <sub>r</sub> , t <sub>f</sub> | Input Rise and Fall Time  | V <sub>CC</sub> = 2 V<br>V <sub>CC</sub> = 4.5 V<br>V <sub>CC</sub> = 6 V | 0 to 1000<br>0 to 500<br>0 to 400 | ns |

**DC SPECIFICATIONS**


| Symbol          | Parameter                 | Test Conditions        |  | Value                                   |                         |      |                      |      |                       | Unit |      |   |
|-----------------|---------------------------|------------------------|--|---|-------------------------|------|----------------------|------|-----------------------|------|------|---|
|                 |                           | V <sub>CC</sub><br>(V) |  | T <sub>A</sub> = 25 °C<br>54HC and 74HC |                         |      | -40 to 85 °C<br>74HC |      | -55 to 125 °C<br>54HC |      |      |   |
|                 |                           |                        |  | Min.                                    | Typ.                    | Max. | Min.                 | Max. | Min.                  |      | Max. |   |
| V <sub>IH</sub> | High Level Input Voltage  | 2.0                    |  | 1.5                                     |                         |      | 1.5                  |      | 1.5                   |      | V    |   |
|                 |                           | 4.5                    |  | 3.15                                    |                         |      | 3.15                 |      | 3.15                  |      |      |   |
|                 |                           | 6.0                    |  | 4.2                                     |                         |      | 4.2                  |      | 4.2                   |      |      |   |
| V <sub>IL</sub> | Low Level Input Voltage   | 2.0                    |  |   |                         | 0.5  |                      | 0.5  |                       | 0.5  | V    |   |
|                 |                           | 4.5                    |  |   |                         | 1.35 |                      | 1.35 |                       | 1.35 |      |   |
|                 |                           | 6.0                    |  |   |                         | 1.8  |                      | 1.8  |                       | 1.8  |      |   |
| V <sub>OH</sub> | High Level Output Voltage | 2.0                    | V <sub>I</sub> =<br>V <sub>IH</sub><br>or<br>V <sub>IL</sub> | I <sub>O</sub> = -20 μA                 | 1.9                     | 2.0  |                      | 1.9  |                       | 1.9  | V    |   |
|                 |                           | 4.5                    |  |   | 4.4                     | 4.5  |                      | 4.4  |                       | 4.4  |      |   |
|                 |                           | 6.0                    |  |   | 5.9                     | 6.0  |                      | 5.9  |                       | 5.9  |      |   |
|                 |                           | 4.5                    | I <sub>O</sub> = -4.0 mA                                     | 4.18                                    | 4.31                    |      | 4.13                 |      | 4.10                  |      |      |   |
|                 |                           | 6.0                    |  | I <sub>O</sub> = -5.2 mA                | 5.68                    | 5.8  |                      | 5.63 |                       | 5.60 |      |   |
| V <sub>OL</sub> | Low Level Output Voltage  | 2.0                    | V <sub>I</sub> =<br>V <sub>IH</sub><br>or<br>V <sub>IL</sub> | I <sub>O</sub> = 20 μA                  |                         | 0.0  | 0.1                  |      | 0.1                   |      | 0.1  | V |
|                 |                           | 4.5                    |  |   |                         | 0.0  | 0.1                  |      | 0.1                   |      | 0.1  |   |
|                 |                           | 6.0                    |  |   |                         | 0.0  | 0.1                  |      | 0.1                   |      | 0.1  |   |
|                 |                           | 4.5                    |  | I <sub>O</sub> = 4.0 mA                 |                         | 0.17 | 0.26                 |      | 0.33                  |      | 0.40 |   |
|                 |                           | 6.0                    |  |   | I <sub>O</sub> = 5.2 mA |      | 0.18                 | 0.26 |                       | 0.33 |      |   |
| I <sub>I</sub>  | Input Leakage Current     | 6.0                    | V <sub>I</sub> = V <sub>CC</sub> or GND                      |   |                         | ±0.1 |                      | ±1   |                       | ±1   | μA   |   |
| I <sub>CC</sub> | Quiescent Supply Current  | 6.0                    | V <sub>I</sub> = V <sub>CC</sub> or GND                      |   |                         | 4    |                      | 40   |                       | 80   | μA   |   |

AC ELECTRICAL CHARACTERISTICS ( $C_L = 50$  pF, Input  $t_r = t_f = 6$  ns)


| Symbol                   | Parameter                          | Test Conditions |  | Value   |      |      |  |      |   | Unit |      |
|--------------------------|------------------------------------|-----------------|--|---|------|------|--|------|---|------|------|
|                          |                                    | $V_{CC}$<br>(V) |  | $T_A = 25\text{ }^\circ\text{C}$<br>54HC and 74HC |      |      | $-40\text{ to }85\text{ }^\circ\text{C}$<br>74HC |      | $-55\text{ to }125\text{ }^\circ\text{C}$<br>54HC |      |      |
|                          |                                    |                 |  | Min.  | Typ. | Max. | Min.   | Max. | Min.  |      | Max. |
| $t_{TLH}$<br>$t_{THL}$   | Output Transition Time             | 2.0             |  |   | 30   | 75   |  | 95   |   | 110  | ns   |
|                          |                                    | 4.5             |  |   | 8    | 15   |  | 19   |   | 22   |      |
|                          |                                    | 6.0             |  |   | 7    | 13   |  | 16   |   | 19   |      |
| $t_{PLH}$<br>$t_{PHL}$   | Propagation Delay Time (CLOCK - Q) | 2.0             |  |   | 45   | 125  |  | 155  |   | 190  | ns   |
|                          |                                    | 4.5             |  |   | 15   | 25   |  | 31   |   | 38   |      |
|                          |                                    | 6.0             |  |   | 13   | 21   |  | 26   |   | 32   |      |
| $f_{MAX}$                | Maximum Clock Frequency            | 2.0             |  | 7   | 22   |      | 5.6  |      | 4.6   |      | MHz  |
|                          |                                    | 4.5             |  | 35  | 67   |      | 28   |      | 23  |      |      |
|                          |                                    | 6.0             |  | 41  | 79   |      | 33   |      | 25  |      |      |
| $t_{W(H)}$<br>$t_{W(L)}$ | Minimum Pulse Width (CLOCK)        | 2.0             |  |   | 18   | 75   |  | 95   |   | 110  | ns   |
|                          |                                    | 4.5             |  |   | 6    | 15   |  | 19   |   | 22   |      |
|                          |                                    | 6.0             |  |   | 6    | 13   |  | 16   |   | 19   |      |
| $t_s$                    | Minimum Set-up Time (A, B, C, D)   | 2.0             |  |   | 12   | 50   |  | 65   |   | 75   | ns   |
|                          |                                    | 4.5             |  |   | 3    | 10   |  | 13   |   | 15   |      |
|                          |                                    | 6.0             |  |   | 2    | 9    |  | 11   |   | 13   |      |
| $t_s$                    | Minimum Set-up Time (W. S.)        | 2.0             |  |   | 30   | 75   |  | 95   |   | 110  | ns   |
|                          |                                    | 4.5             |  |   | 8    | 15   |  | 19   |   | 22   |      |
|                          |                                    | 6.0             |  |   | 6    | 13   |  | 16   |   | 19   |      |
| $t_h$                    | Minimum Hold Time (A, B, C, D)     | 2.0             |  |   |      | 25   |  | 30   |   | 40   | ns   |
|                          |                                    | 4.5             |  |   |      | 5    |  | 6    |   | 8    |      |
|                          |                                    | 6.0             |  |   |      | 4    |  | 5    |   | 7    |      |
| $t_h$                    | Minimum Hold Time (W. S.)          | 2.0             |  |   |      | 0    |  | 0    |   | 0    | ns   |
|                          |                                    | 4.5             |  |   |      | 0    |  | 0    |   | 0    |      |
|                          |                                    | 6.0             |  |   |      | 0    |  | 0    |   | 0    |      |
| $C_{IN}$                 | Input Capacitance                  |                 |  |   | 5    | 10   |  | 10   |   | 10   | pF   |
| $C_{PD}$ (*)             | Power Dissipation Capacitance      |                 |  |   | 39   |      |  |      |   |      | pF   |

(\*)  $C_{PD}$  is defined as the value of the IC's internal equivalent capacitance which is calculated from the operating current consumption without load. (Refer to Test Circuit). Average operating current can be obtained by the following equation:  $I_{CC(opr)} = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}/4$  (per bit), and the CPD for operating current can be obtained by the following equation:  $CPD = 27 + 12 \times n$

SWITCHING CHARACTERISTICS TEST WAVEFORM

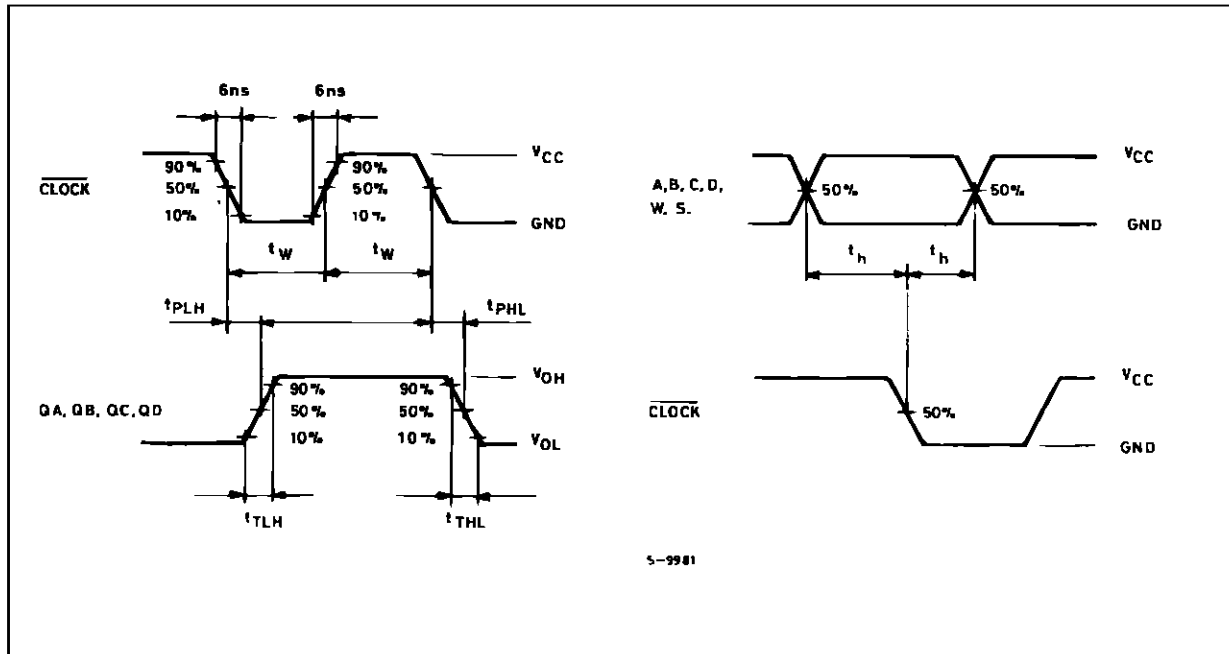


TEST CIRCUIT

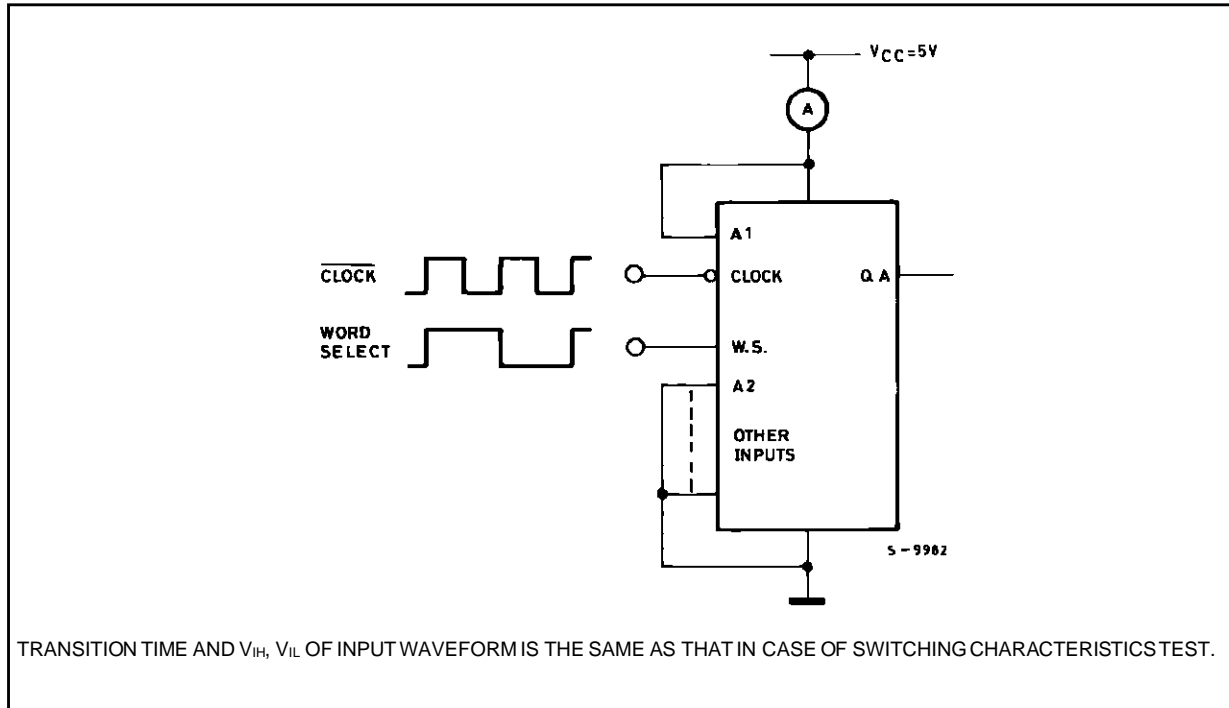

## Plastic DIP16 (0.25) MECHANICAL DATA


| DIM. | mm   |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| a1   | 0.51 |       |      | 0.020 |       |       |
| B    | 0.77 |       | 1.65 | 0.030 |       | 0.065 |
| b    |      | 0.5   |      |       | 0.020 |       |
| b1   |      | 0.25  |      |       | 0.010 |       |
| D    |      |       | 20   |       |       | 0.787 |
| E    |      | 8.5   |      |       | 0.335 |       |
| e    |      | 2.54  |      |       | 0.100 |       |
| e3   |      | 17.78 |      |       | 0.700 |       |
| F    |      |       | 7.1  |       |       | 0.280 |
| I    |      |       | 5.1  |       |       | 0.201 |
| L    |      | 3.3   |      |       | 0.130 |       |
| Z    |      |       | 1.27 |       |       | 0.050 |

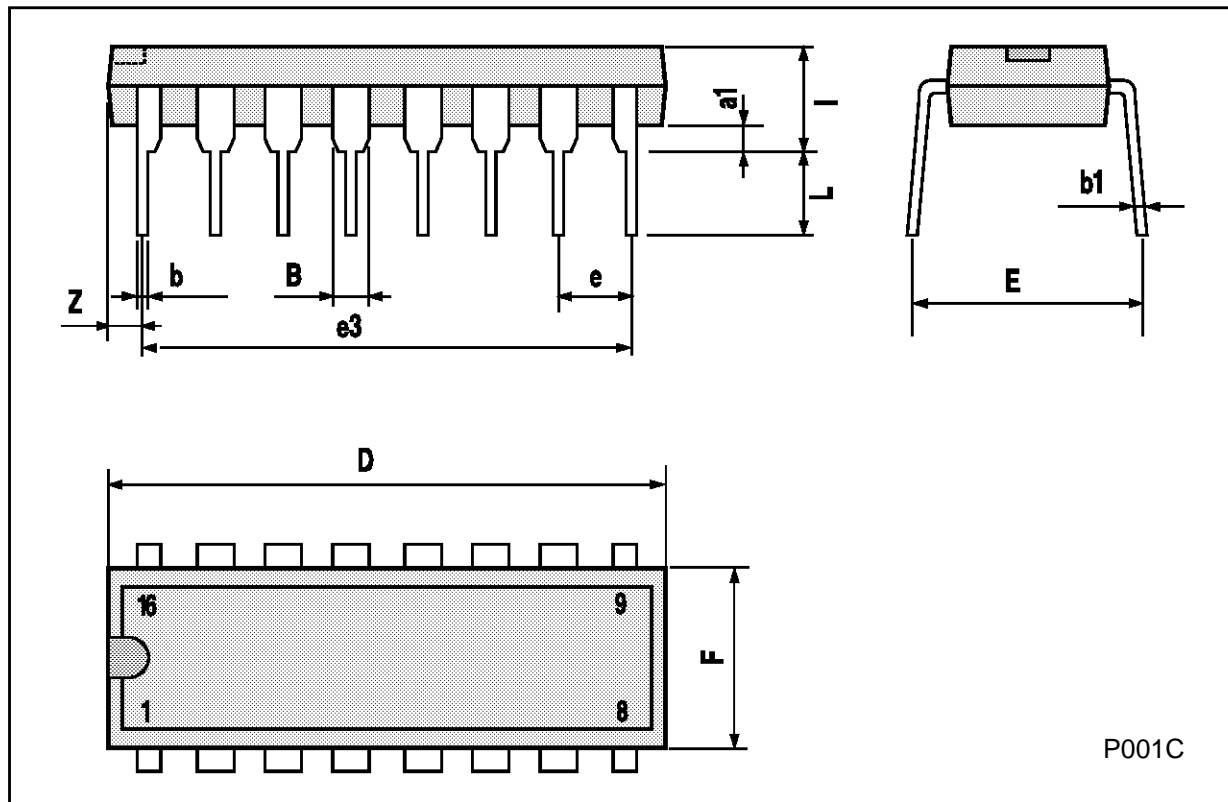

P001C


Ceramic DIP16/1 MECHANICAL DATA

| DIM. | mm   |       |      | inch  |       |       |
|------|------|-------|------|-------|-------|-------|
|      | MIN. | TYP.  | MAX. | MIN.  | TYP.  | MAX.  |
| A    |      |       | 20   |       |       | 0.787 |
| B    |      |       | 7    |       |       | 0.276 |
| D    |      | 3.3   |      |       | 0.130 |       |
| E    | 0.38 |       |      | 0.015 |       |       |
| e3   |      | 17.78 |      |       | 0.700 |       |
| F    | 2.29 |       | 2.79 | 0.090 |       | 0.110 |
| G    | 0.4  |       | 0.55 | 0.016 |       | 0.022 |
| H    | 1.17 |       | 1.52 | 0.046 |       | 0.060 |
| L    | 0.22 |       | 0.31 | 0.009 |       | 0.012 |
| M    | 0.51 |       | 1.27 | 0.020 |       | 0.050 |
| N    |      |       | 10.3 |       |       | 0.406 |
| P    | 7.8  |       | 8.05 | 0.307 |       | 0.317 |
| Q    |      |       | 5.08 |       |       | 0.200 |

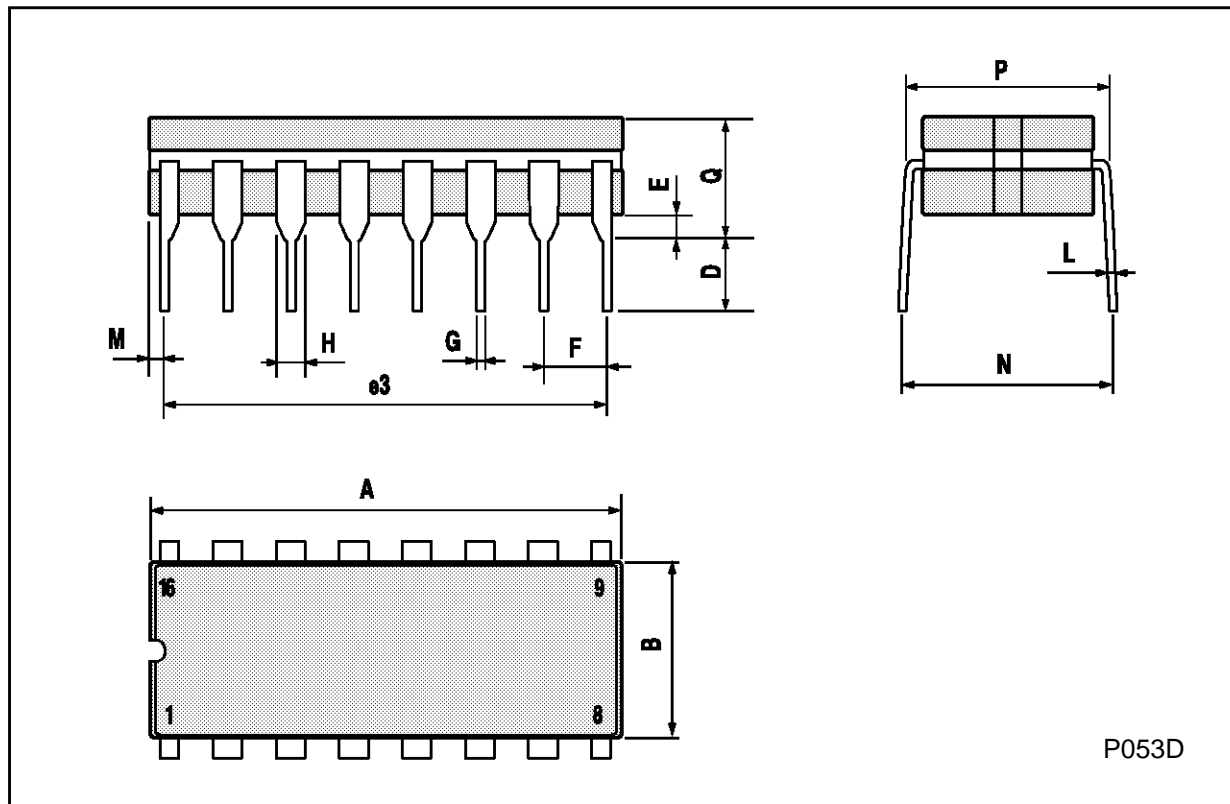

## SO16 (Narrow) MECHANICAL DATA

| DIM. | mm         |      |      | inch  |       |       |
|------|------------|------|------|-------|-------|-------|
|      | MIN.       | TYP. | MAX. | MIN.  | TYP.  | MAX.  |
| A    |            |      | 1.75 |       |       | 0.068 |
| a1   | 0.1        |      | 0.2  | 0.004 |       | 0.007 |
| a2   |            |      | 1.65 |       |       | 0.064 |
| b    | 0.35       |      | 0.46 | 0.013 |       | 0.018 |
| b1   | 0.19       |      | 0.25 | 0.007 |       | 0.010 |
| C    |            | 0.5  |      |       | 0.019 |       |
| c1   | 45° (typ.) |      |      |       |       |       |
| D    | 9.8        |      | 10   | 0.385 |       | 0.393 |
| E    | 5.8        |      | 6.2  | 0.228 |       | 0.244 |
| e    |            | 1.27 |      |       | 0.050 |       |
| e3   |            | 8.89 |      |       | 0.350 |       |
| F    | 3.8        |      | 4.0  | 0.149 |       | 0.157 |
| G    | 4.6        |      | 5.3  | 0.181 |       | 0.208 |
| L    | 0.5        |      | 1.27 | 0.019 |       | 0.050 |
| M    |            |      | 0.62 |       |       | 0.024 |
| S    | 8° (max.)  |      |      |       |       |       |

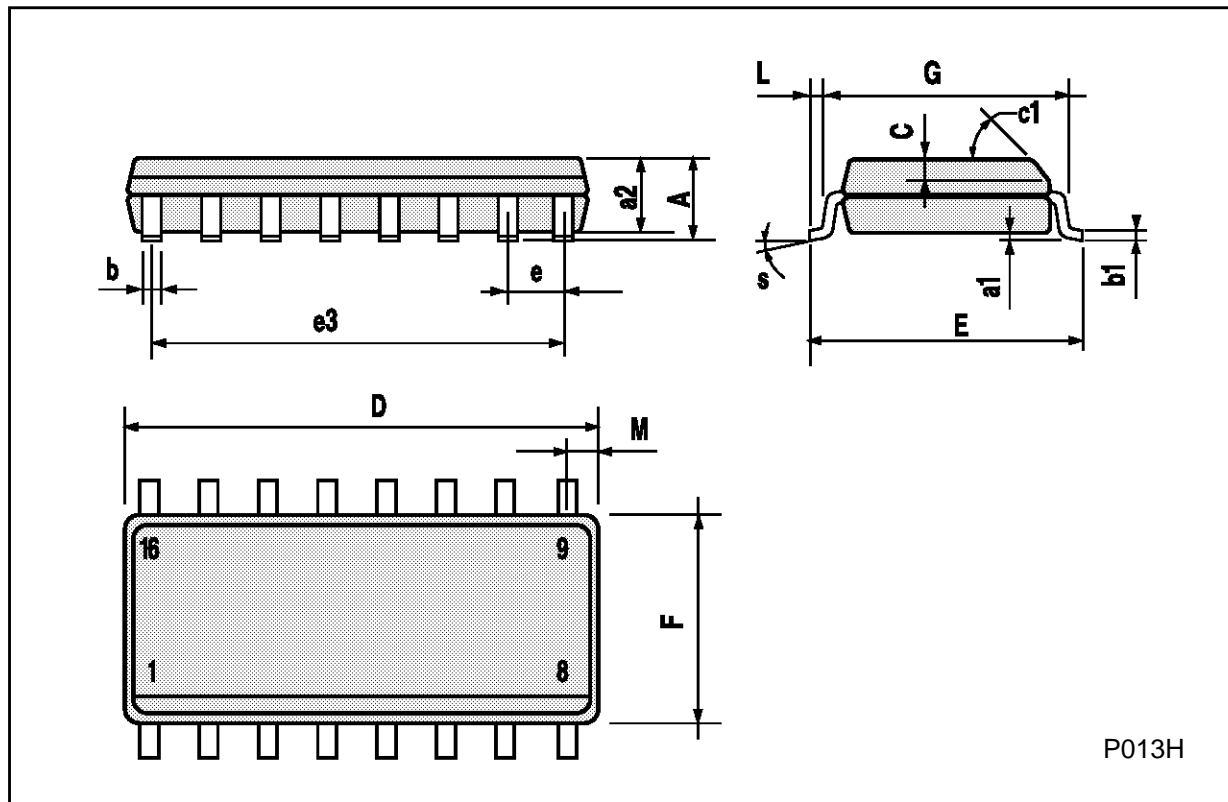

P013H

**PLCC20 MECHANICAL DATA**

| DIM. | mm   |      |       | inch  |       |       |
|------|------|------|-------|-------|-------|-------|
|      | MIN. | TYP. | MAX.  | MIN.  | TYP.  | MAX.  |
| A    | 9.78 |      | 10.03 | 0.385 |       | 0.395 |
| B    | 8.89 |      | 9.04  | 0.350 |       | 0.356 |
| D    | 4.2  |      | 4.57  | 0.165 |       | 0.180 |
| d1   |      | 2.54 |       |       | 0.100 |       |
| d2   |      | 0.56 |       |       | 0.022 |       |
| E    | 7.37 |      | 8.38  | 0.290 |       | 0.330 |
| e    |      | 1.27 |       |       | 0.050 |       |
| e3   |      | 5.08 |       |       | 0.200 |       |
| F    |      | 0.38 |       |       | 0.015 |       |
| G    |      |      | 0.101 |       |       | 0.004 |
| M    |      | 1.27 |       |       | 0.050 |       |
| M1   |      | 1.14 |       |       | 0.045 |       |



Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands -  
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A