

FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES

DESCRIPTION

M5F78MXX is a semiconductor integrated circuit which is designed for 3 terminal regulator which is available for maximum load current 500mA class positive output.

An over current protection circuit, heat protection circuit and ASO protection circuit are included.

Especially, the characteristics of Ripple rejection ratio and output impedance are 5 to 10 times superior to the original ones, which make the device suitable for use in a wide range of power supplies such as microcomputer power supply.


FEATURES

- No need for external connecting parts
- Ripple rejection ratio 90dB
- Output impedance 5mΩ
- Variety of output voltage ranks
(5V, 6V, 7V, 8V, 9V, 10V, 12V, 15V, 18V, 20V, 24V)

APPLICATION


For general power supply of various types of electronic equipment such as VCR, CD

PIN CONFIGURATION(TOP VIEW)



Outline 3P9

BLOCK DIAGRAM

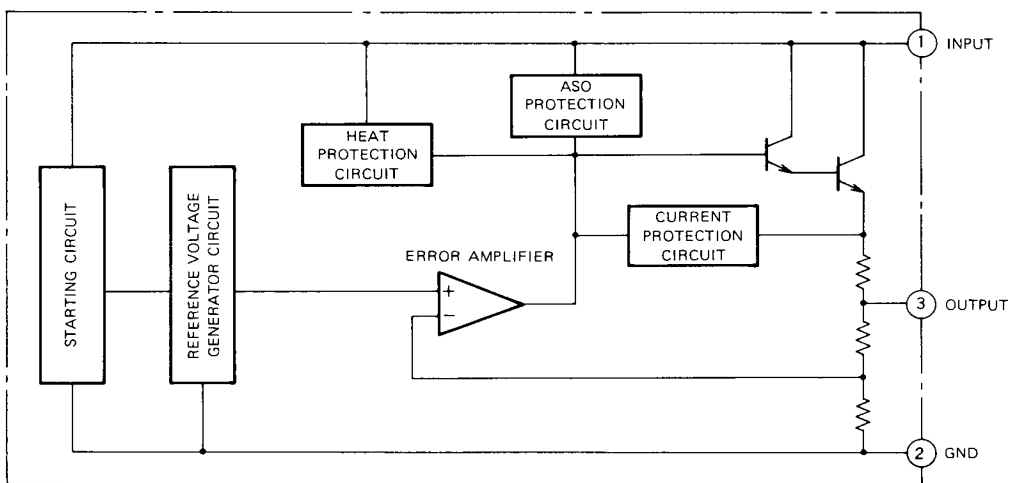


FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$, unless otherwise noted)

Symbol	Parameter	Conditions	Ratings	Unit
V_{IN}	Input voltage		35/40*	V
P_d	Power dissipation		2 (no heat sink) 20 (with infinite heat sink)	W
T_a	Operating temperature		$-20 \sim +85$	$^\circ\text{C}$
T_J	Junction temperature		$-20 \sim +150$	$^\circ\text{C}$
T_{stg}	Storage temperature		$-55 \sim +150$	$^\circ\text{C}$

* M5F78M24

STANDARD CONNECTION

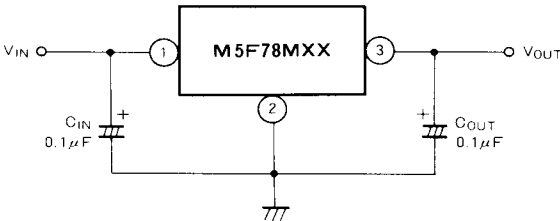

ELECTRIC CHARACTERISTICS

M5F78M05 ($V_{IN} = 10\text{V}$, $I_O = 350\text{mA}$, $0^\circ\text{C} \leq T_J \leq 125^\circ\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ\text{C}$ $7\text{V} \leq V_{IN} \leq 20\text{V}$, $5\text{mA} \leq I_O \leq 350\text{mA}$	4.8	5.0	5.2	V
$\Delta V_{O\text{Line}}$	Input stability	$T_J = 25^\circ\text{C}$, $7\text{V} \leq V_{IN} \leq 25\text{V}$ $T_J = 25^\circ\text{C}$, $8\text{V} \leq V_{IN} \leq 25\text{V}$		3	100	mV
$\Delta V_{O\text{Load}}$	Load stability	$T_J = 25^\circ\text{C}$, $5\text{mA} \leq I_O \leq 500\text{mA}$ $T_J = 25^\circ\text{C}$, $5\text{mA} \leq I_O \leq 200\text{mA}$		4	100	mV
I_{CC}	Operating current	$T_J = 25^\circ\text{C}$		3	5	mA
ΔI_{CC}	Operating current change	$8\text{V} \leq V_{IN} \leq 25\text{V}$, $I_O = 200\text{mA}$ $5\text{mA} \leq I_O \leq 350\text{mA}$			0.8	mA
V_N	Output noise voltage	$T_J = 25^\circ\text{C}$, $10\text{Hz} \sim 100\text{kHz}$		50		μV_{rms}
R_{RR}	Ripple rejection ratio	$f = 120\text{Hz}$, $8\text{V} \leq V_{IN} \leq 18\text{V}$	72	90		dB
V_{DROp}	Input output voltage difference	$T_J = 25^\circ\text{C}$		2		V
R_O	Output resistance	$f = 1\text{kHz}$		5		$\text{m}\Omega$
I_{OS}	Output short current	$T_J = 25^\circ\text{C}$, $V_{IN} = 35\text{V}$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ\text{C}$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5\text{mA}$		0.2		$\text{mV}/^\circ\text{C}$

FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES

M5F78M06 ($V_{IN} = 11V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	5.75	6.0	6.25	V
		$8V \leq V_{IN} \leq 21V$, $5mA \leq I_O \leq 350mA$	5.7		6.3	
ΔV_O Line	Input stability	$T_J = 25^\circ C$, $8V \leq V_{IN} \leq 25V$		3	100	mV
		$T_J = 25^\circ C$, $9V \leq V_{IN} \leq 25V$		1	50	
ΔV_O Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		5	120	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 200mA$		2	60	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$9V \leq V_{IN} \leq 25V$, $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
V_N	Output noise voltage	$T_J = 25^\circ C$, 10Hz ~ 100kHz		60		μV_{rms}
$R.R$	Ripple rejection ratio	$f = 120Hz$, $9V \leq V_{IN} \leq 19V$	70	88		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		2		V
R_O	Output resistance	$f = 1kHz$		5		m Ω
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = 35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.2		mV/ $^\circ C$

M5F78M07 ($V_{IN} = 13V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	6.7	7.0	7.3	V
		$9V \leq V_{IN} \leq 22V$, $5mA \leq I_O \leq 350mA$	6.65		7.35	
ΔV_O Line	Input stability	$T_J = 25^\circ C$, $9V \leq V_{IN} \leq 25V$		4	100	mV
		$T_J = 25^\circ C$, $10V \leq V_{IN} \leq 25V$		2	50	
ΔV_O Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		6	140	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 200mA$		3	70	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$10V \leq V_{IN} \leq 25V$, $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
V_N	Output noise voltage	$T_J = 25^\circ C$, 10Hz ~ 100kHz		71		μV_{rms}
$R.R$	Ripple rejection ratio	$f = 120Hz$, $10V \leq V_{IN} \leq 20V$	69	87		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		2		V
R_O	Output resistance	$f = 1kHz$		5		m Ω
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = 35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.3		mV/ $^\circ C$

FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES

M5F78M08 ($V_{IN} = 14V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	7.7	8.0	8.3	V
		$10.5V \leq V_{IN} \leq 23V$, $5mA \leq I_O \leq 350mA$	7.6		8.4	
ΔV_O Line	Input stability	$T_J = 25^\circ C$, $10.5V \leq V_{IN} \leq 25V$		5	100	mV
		$T_J = 25^\circ C$, $11V \leq V_{IN} \leq 25V$		2	50	
ΔV_O Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		6	160	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 200mA$		3	80	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$10.5V \leq V_{IN} \leq 25V$, $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
V_N	Output noise voltage	$T_J = 25^\circ C$, $10Hz \sim 100kHz$		81		μV_{rms}
$R.R$	Ripple rejection ratio	$f = 120Hz$, $11.5V \leq V_{IN} \leq 21.5V$	68	86		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		2		V
R_O	Output resistance	$f = 1kHz$		5		$m\Omega$
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = 35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.3		mV/ $^\circ C$

M5F78M09 ($V_{IN} = 15V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	8.6	9.0	9.4	V
		$11.5V \leq V_{IN} \leq 24V$, $5mA \leq I_O \leq 350mA$	8.55		9.45	
ΔV_O Line	Input stability	$T_J = 25^\circ C$, $12V \leq V_{IN} \leq 25V$		5	100	mV
		$T_J = 25^\circ C$, $13V \leq V_{IN} \leq 25V$		2	50	
ΔV_O Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		7	180	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 200mA$		3	90	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$12V \leq V_{IN} \leq 28V$, $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
V_N	Output noise voltage	$T_J = 25^\circ C$, $10Hz \sim 100kHz$		91		μV_{rms}
$R.R$	Ripple rejection ratio	$f = 120Hz$, $12.5V \leq V_{IN} \leq 22.5V$	67	85		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		2		V
R_O	Output resistance	$f = 1kHz$		5		$m\Omega$
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = 35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.4		mV/ $^\circ C$

FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES

M5F78M10 ($V_{IN} = 17V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	9.6	10.0	10.4	V
		12.5V ≤ V _{IN} ≤ 25V, 5mA ≤ I _O ≤ 350mA	9.5		10.5	
ΔV _O Line	Input stability	T _J = 25°C, 12.5V ≤ V _{IN} ≤ 28V		6	100	mV
		T _J = 25°C, 14V ≤ V _{IN} ≤ 28V		2	50	
ΔV _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		8	200	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 200mA		4	100	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
ΔI _{CC}	Operating current change	12.5V ≤ V _{IN} ≤ 28V, I _O = 200mA			0.8	mA
		5mA ≤ I _O ≤ 350mA			0.5	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 100kHz		100		μV _{rms}
R _R	Ripple rejection ratio	f = 120Hz, 13V ≤ V _{IN} ≤ 23V	66	84		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		2		V
R _O	Output resistance	f = 1kHz		6		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = 35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
ΔV _O /ΔT _J	Output voltage temperature coefficient	I _O = 5mA		0.4		mV/°C

M5F78M12 ($V_{IN} = 19V$, $I_O = 350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V _{OUT}	Output voltage	T _J = 25°C	11.5	12.0	12.5	V
		14.5V ≤ V _{IN} ≤ 27V, 5mA ≤ I _O ≤ 350mA	11.4		12.6	
ΔV _O Line	Input stability	T _J = 25°C, 14.5V ≤ V _{IN} ≤ 30V		7	100	mV
		T _J = 25°C, 16V ≤ V _{IN} ≤ 30V		2	50	
ΔV _O Load	Load stability	T _J = 25°C, 5mA ≤ I _O ≤ 500mA		9	240	mV
		T _J = 25°C, 5mA ≤ I _O ≤ 200mA		5	120	
I _{CC}	Operating current	T _J = 25°C		3	5	mA
ΔI _{CC}	Operating current change	15V ≤ V _{IN} ≤ 31V, I _O = 200mA			0.8	mA
		5mA ≤ I _O ≤ 350mA			0.5	
V _N	Output noise voltage	T _J = 25°C, 10Hz ~ 100kHz		120		μV _{rms}
R _R	Ripple rejection ratio	f = 120Hz, 15V ≤ V _{IN} ≤ 25V	64	82		dB
V _{DROP}	Input output voltage difference	T _J = 25°C		2		V
R _O	Output resistance	f = 1kHz		6		mΩ
I _{OS}	Output short current	T _J = 25°C, V _{IN} = 35V		200		mA
I _{OP}	Output peak current	T _J = 25°C		0.7		A
ΔV _O /ΔT _J	Output voltage temperature coefficient	I _O = 5mA		0.5		mV/°C

FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES

M5F78M15 ($V_{IN}=23V$, $I_O=350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	14.4	15.0	15.6	V
		$17.5V \leq V_{IN} \leq 30V$, $5mA \leq I_O \leq 350mA$	14.25		15.75	
ΔV_O Line	Input stability	$T_J = 25^\circ C$, $17.5V \leq V_{IN} \leq 30V$		9	100	mV
		$T_J = 25^\circ C$, $20V \leq V_{IN} \leq 30V$		3	50	
ΔV_O Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		12	300	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 200mA$		6	150	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$17.5V \leq V_{IN} \leq 30V$, $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
V_N	Output noise voltage	$T_J = 25^\circ C$, 10Hz ~ 100kHz		150		μV_{rms}
$R.R$	Ripple rejection ratio	$f = 120Hz$, $18.5V \leq V_{IN} \leq 28.5V$	62	80		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		2		V
R_O	Output resistance	$f = 1kHz$		7		$m\Omega$
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = 35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O/\Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.6		mV/ $^\circ C$

M5F78M18 ($V_{IN}=27V$, $I_O=350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	17.3	18.0	18.7	V
		$21V \leq V_{IN} \leq 33V$, $5mA \leq I_O \leq 350mA$	17.1		18.9	
ΔV_O Line	Input stability	$T_J = 25^\circ C$, $21V \leq V_{IN} \leq 33V$		10	100	mV
		$T_J = 25^\circ C$, $24V \leq V_{IN} \leq 33V$		3	50	
ΔV_O Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		14	360	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 200mA$		7	180	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$21V \leq V_{IN} \leq 35V$, $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
V_N	Output noise voltage	$T_J = 25^\circ C$, 10Hz ~ 100kHz		180		μV_{rms}
$R.R$	Ripple rejection ratio	$f = 120Hz$, $22V \leq V_{IN} \leq 32V$	61	79		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		2		V
R_O	Output resistance	$f = 1kHz$		7		$m\Omega$
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = 35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O/\Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.7		mV/ $^\circ C$

FIXED POSITIVE OUTPUT 3-TERMINAL REGULATOR SERIES

M5F78M20 ($V_{IN}=30V$, $I_O=350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	19.2	20.0	20.8	V
		$23V \leq V_{IN} \leq 35V$, $5mA \leq I_O \leq 350mA$	19.0		21.0	
ΔV_O Line	Input stability	$T_J = 25^\circ C$, $23V \leq V_{IN} \leq 35V$		12	100	mV
		$T_J = 25^\circ C$, $24V \leq V_{IN} \leq 35V$		4	50	
ΔV_O Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		16	400	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 200mA$		8	200	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$23V \leq V_{IN} \leq 35V$, $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
V_N	Output noise voltage	$T_J = 25^\circ C$, $10Hz \sim 100kHz$		200		μV_{rms}
R.R	Ripple rejection ratio	$f = 120Hz$, $24V \leq V_{IN} \leq 34V$	60	78		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		2		V
R_O	Output resistance	$f = 1kHz$		8		$m\Omega$
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = 35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		0.8		mV/ $^\circ C$

M5F78M24 ($V_{IN}=33V$, $I_O=350mA$, $0^\circ C \leq T_J \leq 125^\circ C$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
V_{OUT}	Output voltage	$T_J = 25^\circ C$	23.0	24.0	25.0	V
		$27V \leq V_{IN} \leq 38V$, $5mA \leq I_O \leq 350mA$	22.8		25.2	
ΔV_O Line	Input stability	$T_J = 25^\circ C$, $27V \leq V_{IN} \leq 38V$		14	100	mV
		$T_J = 25^\circ C$, $28V \leq V_{IN} \leq 38V$		5	50	
ΔV_O Load	Load stability	$T_J = 25^\circ C$, $5mA \leq I_O \leq 500mA$		19	480	mV
		$T_J = 25^\circ C$, $5mA \leq I_O \leq 200mA$		9	240	
I_{CC}	Operating current	$T_J = 25^\circ C$		3	5	mA
ΔI_{CC}	Operating current change	$27V \leq V_{IN} \leq 38V$, $I_O = 200mA$			0.8	mA
		$5mA \leq I_O \leq 350mA$			0.5	
V_N	Output noise voltage	$T_J = 25^\circ C$, $10Hz \sim 100kHz$		240		μV_{rms}
R.R	Ripple rejection ratio	$f = 120Hz$, $28V \leq V_{IN} \leq 38V$	58	76		dB
V_{DROP}	Input output voltage difference	$T_J = 25^\circ C$		2		V
R_O	Output resistance	$f = 1kHz$		10		$m\Omega$
I_{OS}	Output short current	$T_J = 25^\circ C$, $V_{IN} = 35V$		200		mA
I_{OP}	Output peak current	$T_J = 25^\circ C$		0.7		A
$\Delta V_O / \Delta T_J$	Output voltage temperature coefficient	$I_O = 5mA$		1		mV/ $^\circ C$