

MGFX39V0717

10.7~11.7GHz BAND 8W INTERNALLY MATCHED GaAs FET

DESCRIPTION

The MGFX39V0717 is an internally impedance matched GaAs power FET especially designed for use in 10.7~11.7 GHz band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

FEATURES

- Internally impedance matched
- High output power
 $P_{1dB} = 8 \text{ W (TYP.) @ } f = 10.7 \sim 11.7 \text{ GHz}$
- High linear power gain
 $G_{LP} = 7.0 \text{ dB (TYP.) @ } f = 10.7 \sim 11.7 \text{ GHz}$
- High power added efficiency
 $\eta_{add} = 26\% \text{ (TYP.) @ } f = 10.7 \sim 11.7 \text{ GHz, } P_{1dB}$

APPLICATION


For use in 10.7~11.7 GHz band amplifiers

QUALITY GRADE

- IG

RECOMMENDED BIAS CONDITIONS

- $V_{DS} = 10\text{V}$
- $I_D = 2.4\text{A}$
- Refer to Bias Procedure

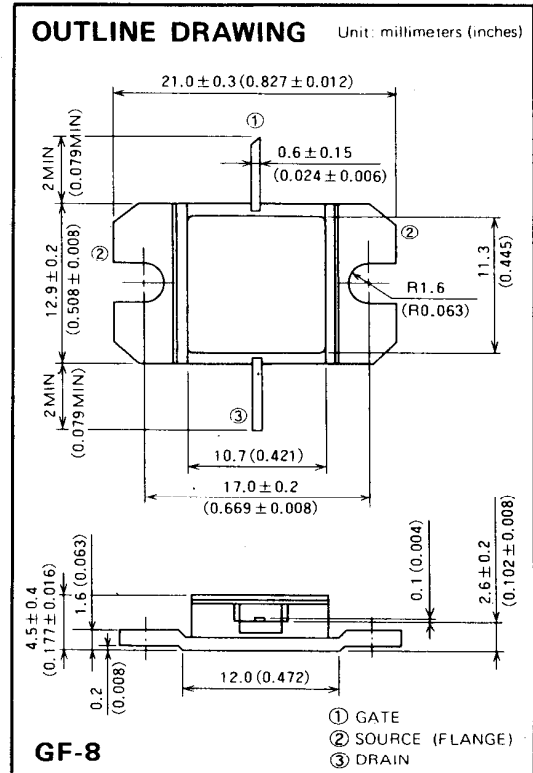

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Symbol	Parameter	Rating	Unit
V_{GDO}	Gate to drain voltage	-15	V
V_{GSO}	Gate to source voltage	-15	V
I_D	Drain current	5.6	A
I_{GR}	Reverse gate current	-18	mA
I_{GF}	Forward gate current	36	mA
P_T	Total power dissipation *1	42.8	W
T_{ch}	Channel temperature	175	$^\circ\text{C}$
T_{stg}	Storage temperature	-65 ~ +175	$^\circ\text{C}$

*1: $T_c = 25^\circ\text{C}$





ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

Symbol	Parameter	Test conditions	Limits			Unit
			Min	Typ	Max	
I_{DSS}	Saturated drain current	$V_{DS} = 3\text{V}, V_{GS} = 0\text{V}$	—	4.0	5.6	A
g_m	Transconductance	$V_{DS} = 3\text{V}, I_D = 2.2\text{A}$	—	2.0	—	S
$V_{GS(off)}$	Gate to source cut-off voltage	$V_{DS} = 3\text{V}, I_D = 20\text{mA}$	-2	-3	-4	V
P_{1dB}	Output power at 1dB gain compression	$V_{DS} = 10\text{V}, I_D \approx 2.4\text{A}, f = 10.7 \sim 11.7\text{GHz}$	37.5	39	—	dBm
G_{LP}	Linear power gain		6.0	7.0	—	dB
η_{add}	Power added efficiency		—	26	—	%
$R_{th(ch-c)}$	Thermal resistance *1	ΔV_f method	—	—	3.5	$^\circ\text{C/W}$

*1: Channel to case

10.7~11.7GHz BAND 8W INTERNALLY MATCHED GaAs FET

TYPICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

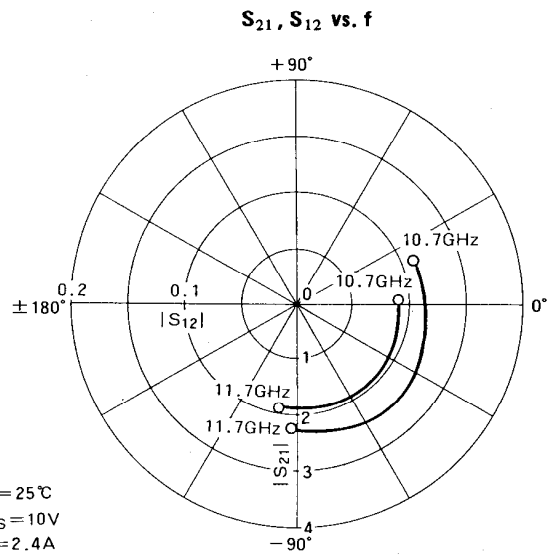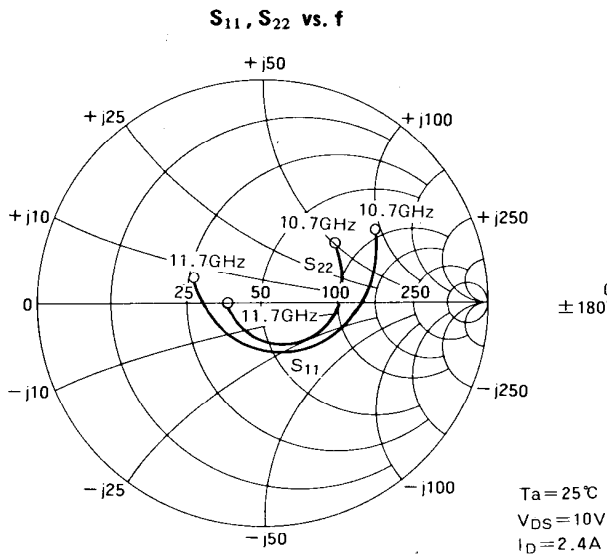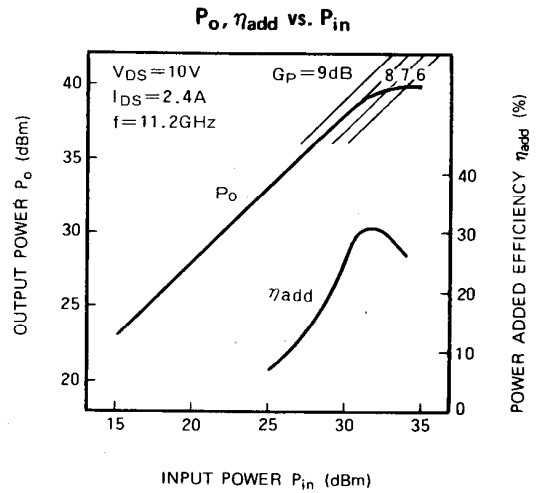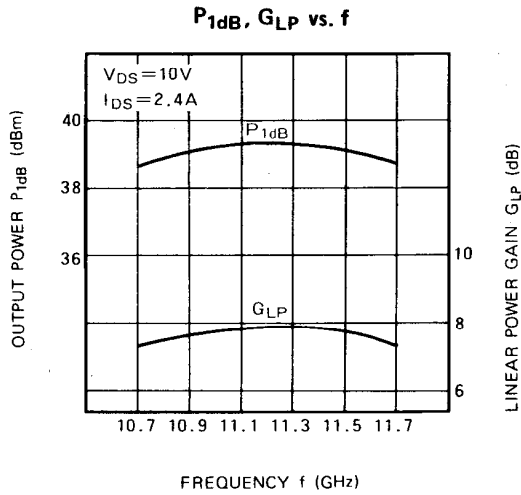

S PARAMETERS ($T_a=25^\circ\text{C}$, $V_{DS}=10\text{V}$, $I_{DS}=2.4\text{A}$)

f (GHz)	S Parameters (TYP.)							
	S_{11}		S_{21}		S_{12}		S_{22}	
	Magn.	Angle (deg.)	Magn.	Angle (deg.)	Magn.	Angle (deg.)	Magn.	Angle (deg.)
10.7	0.64	40	2.15	23	0.082	2	0.44	41
10.9	0.50	15	2.28	-4	0.085	-14	0.34	14
11.1	0.34	-15	2.38	-25	0.087	-34	0.24	-17
11.3	0.16	-71	2.45	-52	0.093	-57	0.14	-73
11.5	0.20	-168	2.30	-73	0.092	-79	0.16	-136
11.7	0.32	151	2.15	-93	0.087	-98	0.18	176