



September 1999
Revised November 1999

NC7SB3257

TinyLogic™ UHS Single 2-to-1 Multiplexer/Demultiplexer Bus Switch (Preliminary)

General Description

The NC7SB3257 is a high performance, 2-to-1 NMOS passgate multiplexer/demultiplexer from Fairchild's Ultra High Speed Series of TinyLogic™. The device is fabricated with advanced sub-micron CMOS technology to achieve high speed enable and disable times and low on resistance. The device is specified to operate over the 4.0 to 5.5V V_{CC} operating range. The control input tolerates voltages up to 5.5V independent of the V_{CC} operating range.


Features

- Space saving SC70 6-lead surface mount package
- Typical 3Ω switch resistance @ 5.0V V_{CC}
- Minimal propagation delay through the switch
- Power down high impedance control input
- Zero bounce in flow through mode
- TTL compatible control input
- Overvoltage tolerance of control input to 7.0V
- Break before make enable circuitry


Ordering Code:

Order Number	Package Number	Package Top Mark	Package Description	Supplied As
NC7SB3257P6X	MAA06A	B7B	6-Lead SC70, EIAJ SC88, 1.25mm Wide	3k Units on Tape and Reel

Logic Symbol




Connection Diagram



(Top View)

Pin One Orientation Diagram



AAA = Package Top Mark - see ordering code

Note: Orientation of Top Mark determines Pin One location. Read the top package mark left to right, Pin One is the lower left pin (see diagram).

Pin Descriptions

Pin Names	Description
A, B ₀ , B ₁	Data Ports
SEL	Control Input

Function Table

Input (SEL)	Function
L	B ₀ Connected to A
H	B ₁ Connected to A

H = HIGH Logic Level
L = LOW Logic Level

TinyLogic™ is a trademark of Fairchild Semiconductor Corporation.

NC7SB3257 TinyLogic™ UHS Single 2-to-1 Multiplexer/Demultiplexer Bus Switch (Preliminary)

NC7SB3257

Absolute Maximum Ratings (Note 1)		Recommended Operating Conditions (Note 2)	
Supply Voltage (V_{CC})	-0.5V to +7.0V	Supply Voltage Operating (V_{CC})	4.0V to 5.5V
DC Switch Voltage (V_S)	-0.5V to +7.0V	Control Input Voltage (V_{IN})	0V to V_{CC}
DC Output Voltage (V_{OUT})	-0.5V to +7.0V	Switch Input Voltage (V_{IN})	0V to V_{CC}
DC Input Diode Current (I_{IK})		Output Voltage (V_{OUT})	0V to V_{CC}
@ (I_{IK}) $V_{IN} < 0V$	-50 mA	Operating Temperature (T_A)	-40°C to +85°C
DC Output Current (I_{OUT})	128 mA	Input Rise and Fall Time (t_r, t_f)	
DC V_{CC} or Ground Current (I_{CC}/I_{GND})	±100 mA	Control Input $V_{CC} = 4.0V$ to $5.5V$	0 ns/V to 5 ns/V
Storage Temperature Range (T_{STG})	-65°C to +150°C	Thermal Resistance (θ_{JA})	350°C/W
Junction Lead Temperature under Bias (T_J)	+150°C	Note 1: Absolute maximum ratings are DC values beyond which the device may be damaged or have its useful life impaired. The datasheet specifications should be met, without exception, to ensure that the system design is reliable over its power supply, temperature, and output/input loading variables. Fairchild does not recommend operation outside datasheet specifications.	
Lead Temperature (T_L)		Note 2: Control input must be held HIGH or LOW, it must not float.	
(Soldering, 10 seconds)	+260°C	Note 3: The input and output negative voltage ratings may be exceeded if the input and output diode current ratings are observed.	
Power Dissipation (P_D) @ +85°C	180 mW		

DC Electrical Characteristics

Symbol	Parameter	V_{CC} (V)	$T_A = -40^\circ\text{C to } +85^\circ\text{C}$			Units	Conditions
			Min	Typ	Max		
V_{IK}	Clamp Diode Voltage	4.5			-1.2	V	$I_{IN} = -18\text{ mA}$
V_{IH}	HIGH Level Input Voltage	4.5 – 5.5	2.0			V	
V_{IL}	LOW Level Input Voltage	4.5 – 5.5			0.8		
I_{IN}	Input Leakage Current	5.5			±1	µA	$0 \leq V_{IN} \leq 5.5V$
I_{OFF}	OFF State Leakage Current	5.5			±1	µA	$0 \leq A, B \leq V_{CC}$
R_{ON}	Switch ON Resistance (Note 4)	4.5		3	7	Ω	$V_{IN} = 0V, I_{IN} = 64\text{ mA}$
		4.5		3	7	Ω	$V_{IN} = 0V, I_{IN} = 30\text{ mA}$
		4.5		6	15	Ω	$V_{IN} = 2.4V, I_{IN} = 15\text{ mA}$
		4.0		10	20	Ω	$V_{IN} = 2.4V, I_{IN} = 15\text{ mA}$
I_{CC}	Quiescent Supply Current	5.5			10	µA	$V_{IN} = V_{CC}$ or GND $I_{OUT} = 0$
ΔI_{CC}	Increase in I_{CC} Per Input (Note 5)	5.5		0.9	2.5	mA	$V_{IN} = 3.4V, I_O = 0$ Control Input Only


Note 4: Measured by the voltage drop between A and B pins at the indicated current through the switch. On resistance is determined by the lower of the voltages on the two (A or B Ports).

Note 5: Per TTL driven Input ($V_{IN} = 3.4V$, Control input only). A and B pins do not contribute to I_{CC} .

AC Electrical Characteristics																																
Symbol	Parameter	V _{CC} (V)	T _A = -40°C to +85°C C _L = 50 pF, R _U = R _D = 500Ω			Units	Conditions	Fig. No.																								
			Min	Typ	Max																											
t _{PHL} t _{PLH}	Propagation Delay Bus to Bus (Note 6)	4.0 – 55		0.25		ns	V _I = OPEN	Figure 1 Figure 2																								
t _{PZL} t _{PZH}	Output Enable Time	4.5 – 5.5	1.0	8.0		ns	V _I = 7V for t _{PZL}	Figure 1																								
		4.0	1.0	8.5			V _I = 0V for t _{PZH}	Figure 2																								
t _{PLZ} t _{PHZ}	Output Disable Time	4.5 – 5.5	1.0	5.5			V _I = 7V for t _{PLZ}	Figure 1																								
		4.0	1.0	6.0			V _I = 0V for t _{PHZ}	Figure 2																								
t _{B-M}	Break Before Make Time (Note 7)	4.5 – 5.5					R _L = 100Ω	Figure 3																								
		4.0					C _L = 20 Pf																									
<p>Note 6: This parameter is guaranteed by design but not tested. The bus switch contributes no propagation delay other than the RC delay of the on resistance of the switch and the 50 pF load capacitance, when driven by an ideal voltage source (zero output impedance).</p> <p>Note 7: Guaranteed by design.</p>																																
<p>Capacitance (Note 8)</p> <table border="1"> <thead> <tr> <th>Symbol</th> <th>Parameter</th> <th>Typ</th> <th>Max</th> <th>Units</th> <th>Conditions</th> </tr> </thead> <tbody> <tr> <td>C_{IN}</td> <td>Control Pin Input Capacitance</td> <td>2</td> <td></td> <td>pF</td> <td>V_{CC} = 0V</td> </tr> <tr> <td>C_{IO-B}</td> <td>B Port OFF Capacitance</td> <td>4.5</td> <td>10</td> <td>pF</td> <td>V_{CC} = 5.0V</td> </tr> <tr> <td>C_{IO-A}</td> <td>A Port ON Capacitance</td> <td>9</td> <td>20</td> <td>pF</td> <td>V_{CC} = 5.0V</td> </tr> </tbody> </table> <p>Note 8: Capacitance is characterized but not tested.</p>									Symbol	Parameter	Typ	Max	Units	Conditions	C _{IN}	Control Pin Input Capacitance	2		pF	V _{CC} = 0V	C _{IO-B}	B Port OFF Capacitance	4.5	10	pF	V _{CC} = 5.0V	C _{IO-A}	A Port ON Capacitance	9	20	pF	V _{CC} = 5.0V
Symbol	Parameter	Typ	Max	Units	Conditions																											
C _{IN}	Control Pin Input Capacitance	2		pF	V _{CC} = 0V																											
C _{IO-B}	B Port OFF Capacitance	4.5	10	pF	V _{CC} = 5.0V																											
C _{IO-A}	A Port ON Capacitance	9	20	pF	V _{CC} = 5.0V																											


NC7SB3257

AC Loading and Waveforms



Note: Input Driven by 50Ω source terminated in 50Ω
Note: C_L includes load and stray capacitance
Note: Input PRR = 1.0 MHz; $t_W = 500$ ns

FIGURE 1. AC Test Circuit

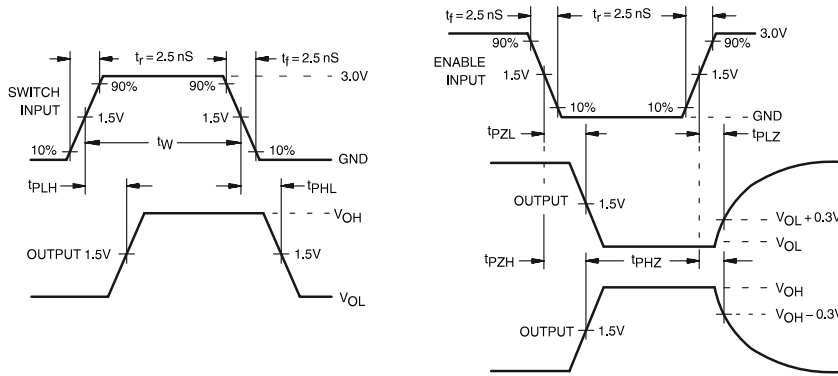

Input = AC Waveform;
 PRR = Variable; Duty Cycle = 50%

FIGURE 2. AC Waveforms

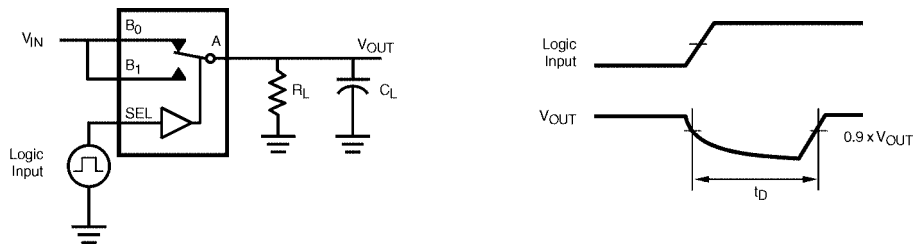


FIGURE 3. Break Before Make Interval Timing

Tape and Reel Specification							
TAPE FORMAT							
Package Designator	Tape Section	Number Cavities	Cavity Status	Cover Tape Status			
P6X	Leader (Start End)	125 (typ)	Empty	Sealed			
	Carrier	3000	Filled	Sealed			
	Trailer (Hub End)	75 (typ)	Empty	Sealed			

TAPE DIMENSIONS inches (millimeters)


The technical drawings show the following dimensions and features:

- Top View:** Shows a carrier tape with four cavities. Dimensions include:
 - Pin diameter: $\varnothing 0.061 \pm 0.002$ TYP. [1.55 ± 0.05]
 - Pin pitch: 0.157 TYP. [4]
 - Pin offset: 0.069 [1.75]
 - Pin diameter: $\varnothing 0.079 \pm 0.002$ TYP. [2.0 ± 0.05]
 - Dimension A: Distance from tangent point to cavity center.
 - Dimension B: Distance from tangent point to pin center.
 - Dimension F: Distance from pin center to cavity center.
 - Dimension P1: Pin-to-pin distance.
 - Dimension W: Total tape width.
 - Dimension K₀: Dimension from tangent point to cavity center.
- SECTION B-B:** Shows a cross-section of the tape with a 3° MAX. TYP. angle and a 0.008 [0.2] thickness.
- SECTION A-A:** Shows a cross-section of the cavity with a 3° MAX TYP. angle and CAVITY SYMM.
- BEND RADIUS:** R 1.181 MIN. [30]. BEND RADIUS NOT TO SCALE.

Package	Tape Size	DIM A	DIM B	DIM F	DIM K ₀	DIM P1	DIM W
SC70-6	8 mm	0.093 (2.35)	0.096 (2.45)	0.138 ± 0.004 (3.5 ± 0.10)	0.053 ± 0.004 (1.35 ± 0.10)	0.157 (4)	0.315 ± 0.004 (8 ± 0.1)


NC7SB3257

REEL DIMENSIONS inches (millimeters)

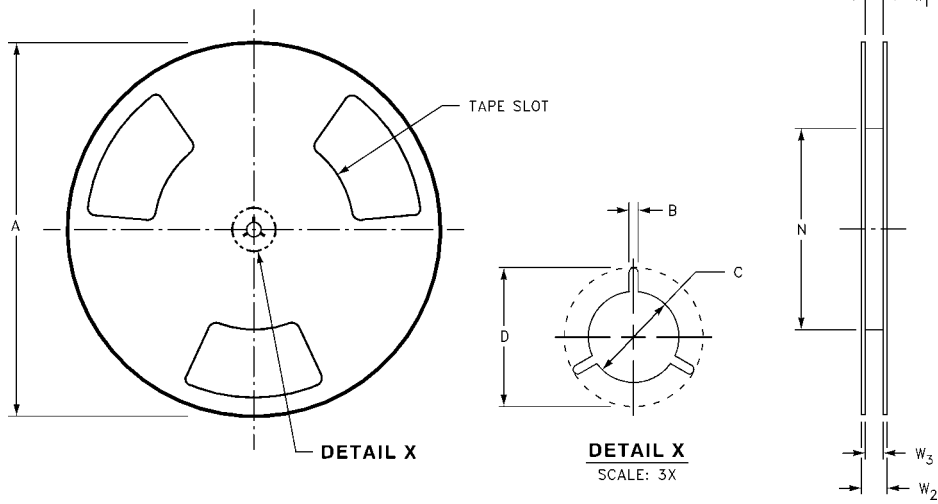

Tape Size	A	B	C	D	N	W1	W2	W3
8 mm	7.0 (177.8)	0.059 (1.50)	0.512 (13.00)	0.795 (20.20)	2.165 (55.00)	0.331 + 0.059/-0.000 (8.40 + 1.50/-0.00)	0.567 (14.40)	W1 + 0.078/-0.039 (W1 + 2.00/-1.00)

Physical Dimensions inches (millimeters) unless otherwise noted

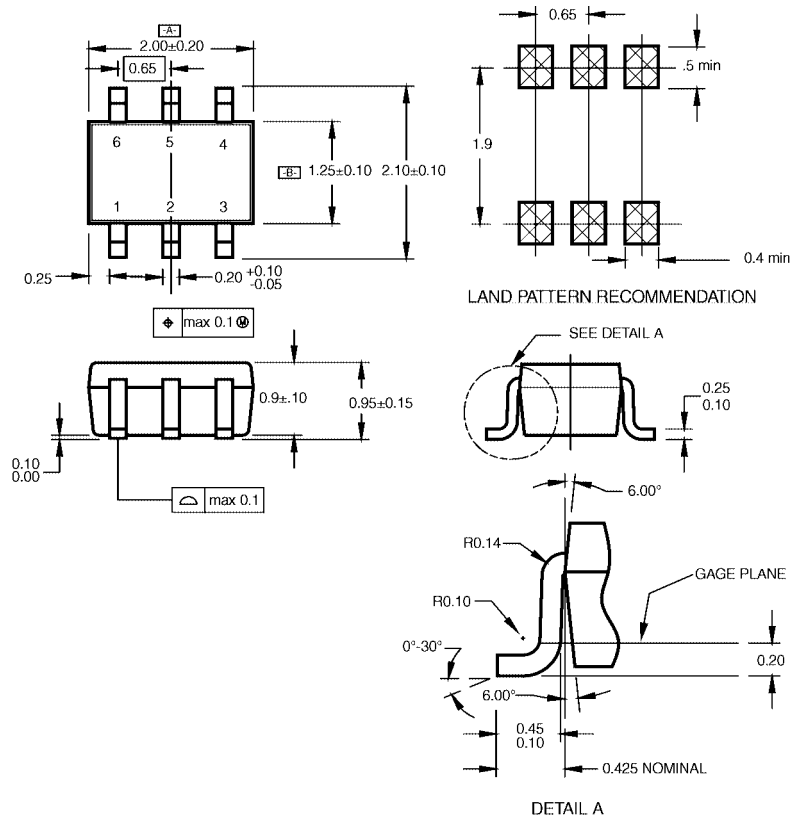

- NOTES:
- A. CONFORMS TO EIAJ REGISTERED OUTLINE DRAWING SC88.
 - B. DIMENSIONS DO NOT INCLUDE BURRS OR MOLD FLASH.
 - C. DIMENSIONS ARE IN MILLIMETERS.

**6-Lead SC70, EIAJ SC88, 1.25mm Wide
Package Number MAA06A**

Fairchild does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and Fairchild reserves the right at any time without notice to change said circuitry and specifications.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.

www.fairchildsemi.com