

## 3-TERMINAL NEGATIVE VOLTAGE REGULATOR

## ■ GENERAL DESCRIPTION


The NJM7900 series of Monolithic 3-Terminal Negative Regulators is constructed using the New JRC Planar epitaxial process. These negative regulators are intended as complements to the popular NJM7800 series of positive voltage regulators, and they are available in the same voltage options from  $-5$  to  $-24\text{V}$ . The 7900 series employ internal current-limiting, safe-area protection, and thermal shutdown, making the virtually indestructible.

## ■ FEATURES

- Internal Short Circuit Current Limit
- Internal Thermal Overload Protection
- Excellent Ripple Rejection
- Guarantee'd 1.5A Output Current
- Package Outline TO-220F
- Bipolar Technology


## ■ PACKAGE OUTLINE

(TO-220F)



(note) The radiation fin is connected to Pin 2.

## ■ EQUIVALENT CIRCUIT

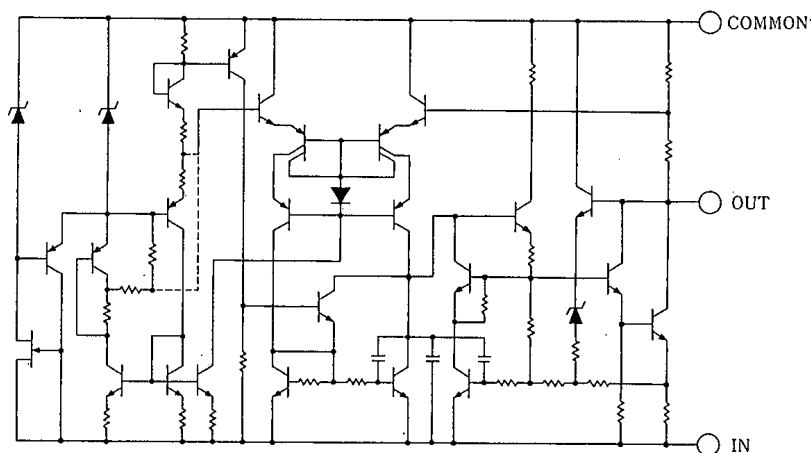

## ■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER                   | SYMBOL                         | MAXIMUM RATINGS          |            | UNIT |
|-----------------------------|--------------------------------|--------------------------|------------|------|
| Input Voltage               | V <sub>IN</sub>                | 7905~7909                | -35        | V    |
|                             |                                | 7912~7915                | -35        |      |
|                             |                                | 7918~7924                | -40        |      |
| Storage Temperature Range   | T <sub>stg</sub>               | -40 ~ +150               |            | °C   |
| Operating Temperature Range | Operating Junction Temperature | T <sub>j</sub>           | -30 ~ +150 | °C   |
|                             | Operating Junction Temperature | T <sub>opr</sub>         | -40 ~ +85  |      |
| Power Dissipation           | P <sub>D</sub>                 | 16(T <sub>c</sub> ≤45°C) |            | W    |

## ■ THERMAL CHARACTERISTICS

|                    |                                 |               |    |      |
|--------------------|---------------------------------|---------------|----|------|
| Thermal Resistance | Junction-to-Ambient Temperature | $\theta_{ja}$ | 60 | °C/W |
|                    | Junction-to-Case                | $\theta_{jc}$ | 5  |      |

## ■ ELECTRICAL CHARACTERISTICS ( $T_j=25^\circ\text{C}$ , $C_{IN}=2.2\ \mu\text{F}$ , $C_O=1.0\ \mu\text{F}$ ) Measurement is to be conducted in pulse testing.



| PARAMETER                                         | SYMBOL                  | TEST CONDITION                                                                | Min.  | TYP.  | MAX.  | UNIT                 |
|---------------------------------------------------|-------------------------|-------------------------------------------------------------------------------|-------|-------|-------|----------------------|
| <b>NJM7905FA</b>                                  |                         |                                                                               |       |       |       |                      |
| Output Voltage                                    | $V_O$                   | $V_{IN}=-10\text{V}$ , $I_O=0.5\text{A}$                                      | -4.8  | -5.0  | -5.2  | V                    |
| Quiescent Current                                 | $I_O$                   | $V_{IN}=-10\text{V}$ , $I_O=0\text{mA}$                                       | —     | 2.2   | 5.0   | mA                   |
| Load Regulation                                   | $\Delta V_O - I_O$      | $V_{IN}=-10\text{V}$ , $I_O=0.005\sim 1.5\text{A}$                            | —     | 50    | 80    | mV                   |
| Line Regulation                                   | $\Delta V_O - V_{IN}$   | $V_{IN}=-7\sim -25\text{V}$ , $I_O=0.5\text{A}$                               | —     | 5     | 50    | mV                   |
| Ripple Rejection                                  | RR                      | $V_{IN}=-10\text{V}$ , $I_O=0.5\text{A}$ , $e_m=2V_{p-p}$ , $f=120\text{Hz}$  | 54    | 60    | —     | dB                   |
| Output Noise Voltage                              | $V_{NO}$                | $V_{IN}=-10\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}\sim 100\text{kHz}$ | —     | 100   | —     | $\mu\text{V}$        |
| Average Temperature Coefficient of Output Voltage | $\Delta V_O / \Delta T$ | $V_{IN}=-10\text{V}$ , $I_O=5\text{mA}$                                       | —     | -0.4  | —     | mV/ $^\circ\text{C}$ |
| <b>NJM7906FA</b>                                  |                         |                                                                               |       |       |       |                      |
| Output Voltage                                    | $V_O$                   | $V_{IN}=-11\text{V}$ , $I_O=0.5\text{A}$                                      | -5.75 | -6.0  | -6.25 | V                    |
| Quiescent Current                                 | $I_O$                   | $V_{IN}=-11\text{V}$ , $I_O=0\text{mA}$                                       | —     | 2.2   | 5.0   | mA                   |
| Load Regulation                                   | $\Delta V_O - I_O$      | $V_{IN}=-11\text{V}$ , $I_O=0.005\sim 1.5\text{A}$                            | —     | 50    | 90    | mV                   |
| Line Regulation                                   | $\Delta V_O - V_{IN}$   | $V_{IN}=-8\sim -25\text{V}$ , $I_O=0.5\text{A}$                               | —     | 5     | 60    | mV                   |
| Ripple Rejection                                  | RR                      | $V_{IN}=-11\text{V}$ , $I_O=0.5\text{A}$ , $e_m=2V_{p-p}$ , $f=120\text{Hz}$  | 54    | 60    | —     | dB                   |
| Output Noise Voltage                              | $V_{NO}$                | $V_{IN}=-11\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}\sim 100\text{kHz}$ | —     | 110   | —     | $\mu\text{V}$        |
| Average Temperature Coefficient of Output Voltage | $\Delta V_O / \Delta T$ | $V_{IN}=-11\text{V}$ , $I_O=5\text{mA}$                                       | —     | -0.5  | —     | mV/ $^\circ\text{C}$ |
| <b>NJM7908FA</b>                                  |                         |                                                                               |       |       |       |                      |
| Output Voltage                                    | $V_O$                   | $V_{IN}=-14\text{V}$ , $I_O=0.5\text{A}$                                      | -7.7  | -8.0  | -8.3  | V                    |
| Quiescent Current                                 | $I_O$                   | $V_{IN}=-14\text{V}$ , $I_O=0\text{mA}$                                       | —     | 2.2   | 5.0   | mA                   |
| Load Regulation                                   | $\Delta V_O - I_O$      | $V_{IN}=-14\text{V}$ , $I_O=0.005\sim 1.5\text{A}$                            | —     | 60    | 110   | mV                   |
| Line Regulation                                   | $\Delta V_O - V_{IN}$   | $V_{IN}=-10.5\sim -25\text{V}$ , $I_O=0.5\text{A}$                            | —     | 8     | 80    | mV                   |
| Ripple Rejection                                  | RR                      | $V_{IN}=-14\text{V}$ , $I_O=0.5\text{A}$ , $e_m=2V_{p-p}$ , $f=120\text{Hz}$  | 54    | 60    | —     | dB                   |
| Output Noise Voltage                              | $V_{NO}$                | $V_{IN}=-14\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}\sim 100\text{kHz}$ | —     | 130   | —     | $\mu\text{V}$        |
| Average Temperature Coefficient of Output Voltage | $\Delta V_O / \Delta T$ | $V_{IN}=-14\text{V}$ , $I_O=5\text{mA}$                                       | —     | -0.7  | —     | mV/ $^\circ\text{C}$ |
| <b>NJM7909FA</b>                                  |                         |                                                                               |       |       |       |                      |
| Output Voltage                                    | $V_O$                   | $V_{IN}=-15\text{V}$ , $I_O=0.5\text{A}$                                      | -8.65 | -9.0  | -9.35 | V                    |
| Quiescent Current                                 | $I_O$                   | $V_{IN}=-15\text{V}$ , $I_O=0\text{mA}$                                       | —     | 2.2   | 5.0   | mA                   |
| Load Regulation                                   | $\Delta V_O - I_O$      | $V_{IN}=-15\text{V}$ , $I_O=0.005\sim 1.5\text{A}$                            | —     | 60    | 120   | mV                   |
| Line Regulation                                   | $\Delta V_O - V_{IN}$   | $V_{IN}=-11.5\sim -25\text{V}$ , $I_O=0.5\text{A}$                            | —     | 8     | 90    | mV                   |
| Ripple Rejection                                  | RR                      | $V_{IN}=-15\text{V}$ , $I_O=0.5\text{A}$ , $e_m=2V_{p-p}$ , $f=120\text{Hz}$  | 54    | 59    | —     | dB                   |
| Output Noise Voltage                              | $V_{NO}$                | $V_{IN}=-15\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}\sim 100\text{kHz}$ | —     | 150   | —     | $\mu\text{V}$        |
| Average Temperature Coefficient of Output Voltage | $\Delta V_O / \Delta T$ | $V_{IN}=-15\text{V}$ , $I_O=5\text{mA}$                                       | —     | -0.8  | —     | mV/ $^\circ\text{C}$ |
| <b>NJM7912FA</b>                                  |                         |                                                                               |       |       |       |                      |
| Output Voltage                                    | $V_O$                   | $V_{IN}=-19\text{V}$ , $I_O=0.5\text{A}$                                      | -11.5 | -12.0 | -12.5 | V                    |
| Quiescent Current                                 | $I_O$                   | $V_{IN}=-19\text{V}$ , $I_O=0\text{mA}$                                       | —     | 2.7   | 6.0   | mA                   |
| Load Regulation                                   | $\Delta V_O - I_O$      | $V_{IN}=-19\text{V}$ , $I_O=0.005\sim 1.5\text{A}$                            | —     | 60    | 150   | mV                   |
| Line Regulation                                   | $\Delta V_O - V_{IN}$   | $V_{IN}=-14.5\sim -30\text{V}$ , $I_O=0.5\text{A}$                            | —     | 3     | 120   | mV                   |
| Ripple Rejection                                  | RR                      | $V_{IN}=-19\text{V}$ , $I_O=0.5\text{A}$ , $e_m=2V_{p-p}$ , $f=120\text{Hz}$  | 54    | 68    | —     | dB                   |
| Output Noise Voltage                              | $V_{NO}$                | $V_{IN}=-19\text{V}$ , $I_O=0.5\text{A}$ , $BW=10\text{Hz}\sim 100\text{kHz}$ | —     | 150   | —     | $\mu\text{V}$        |
| Average Temperature Coefficient of Output Voltage | $\Delta V_O / \Delta T$ | $V_{IN}=-19\text{V}$ , $I_O=5\text{mA}$                                       | —     | -0.4  | —     | mV/ $^\circ\text{C}$ |

## ■ ELECTRICAL CHARACTERISTICS (T<sub>j</sub>=25°C, C<sub>IN</sub>=2.2 μF, C<sub>O</sub>=1.0 μF)



| PARAMETER                                         | SYMBOL                           | TEST CONDITION                                                                           | MIN.  | TYP.  | MAX.  | UNIT  |
|---------------------------------------------------|----------------------------------|------------------------------------------------------------------------------------------|-------|-------|-------|-------|
| <b>NJM7915FA</b>                                  |                                  |                                                                                          |       |       |       |       |
| Output Voltage                                    | V <sub>O</sub>                   | V <sub>IN</sub> =-23V, I <sub>O</sub> =0.5A                                              | -14.4 | -15.0 | -15.6 | V     |
| Quiescent Current                                 | I <sub>O</sub>                   | V <sub>IN</sub> =-23V, I <sub>O</sub> =0mA                                               | —     | 2.7   | 6.0   | mA    |
| Load Regulation                                   | ΔV <sub>O</sub> -I <sub>O</sub>  | V <sub>IN</sub> =-23V, I <sub>O</sub> =0.005~1.5A                                        | —     | 60    | 180   | mV    |
| Line Regulation                                   | ΔV <sub>O</sub> -V <sub>IN</sub> | V <sub>IN</sub> =-17.5~-30V, I <sub>O</sub> =0.5A                                        | —     | 3     | 150   | mV    |
| Ripple Rejection                                  | RR                               | V <sub>IN</sub> =-23V, I <sub>O</sub> =0.5A, e <sub>m</sub> =2V <sub>p-p</sub> , f=120Hz | 54    | 67    | —     | dB    |
| Output Noise Voltage                              | V <sub>NO</sub>                  | V <sub>IN</sub> =-23V, I <sub>O</sub> =0.5A, BW=10Hz~100kHz                              | —     | 170   | —     | μV    |
| Average Temperature Coefficient of Output Voltage | ΔV <sub>O</sub> /ΔT              | V <sub>IN</sub> =-23V, I <sub>O</sub> =5mA                                               | —     | -0.5  | —     | mV/°C |
| <b>NJM7918FA</b>                                  |                                  |                                                                                          |       |       |       |       |
| Output Voltage                                    | V <sub>O</sub>                   | V <sub>IN</sub> =-27V, I <sub>O</sub> =0.5A                                              | -17.3 | -18.0 | -18.7 | V     |
| Quiescent Current                                 | I <sub>O</sub>                   | V <sub>IN</sub> =-27V, I <sub>O</sub> =0mA                                               | —     | 2.7   | 6.0   | mA    |
| Load Regulation                                   | ΔV <sub>O</sub> -I <sub>O</sub>  | V <sub>IN</sub> =-27V, I <sub>O</sub> =0.005~1.5A                                        | —     | 60    | 210   | mV    |
| Line Regulation                                   | ΔV <sub>O</sub> -V <sub>IN</sub> | V <sub>IN</sub> =-21~-33V, I <sub>O</sub> =0.5A                                          | —     | 4     | 180   | mV    |
| Ripple Rejection                                  | RR                               | V <sub>IN</sub> =-27V, I <sub>O</sub> =0.5A, e <sub>m</sub> =2V <sub>p-p</sub> , f=120Hz | 54    | 66    | —     | dB    |
| Output Noise Voltage                              | V <sub>NO</sub>                  | V <sub>IN</sub> =-27V, I <sub>O</sub> =0.5A, BW=10Hz~100kHz                              | —     | 200   | —     | μV    |
| Average Temperature Coefficient of Output Voltage | ΔV <sub>O</sub> /ΔT              | V <sub>IN</sub> =-27V, I <sub>O</sub> =5mA                                               | —     | -0.6  | —     | mV/°C |
| <b>NJM7924FA</b>                                  |                                  |                                                                                          |       |       |       |       |
| Output Voltage                                    | V <sub>O</sub>                   | V <sub>IN</sub> =-33V, I <sub>O</sub> =0.5A                                              | -23.0 | -24.0 | -25.0 | V     |
| Quiescent Current                                 | I <sub>O</sub>                   | V <sub>IN</sub> =-33V, I <sub>O</sub> =0mA                                               | —     | 2.7   | 6.0   | mA    |
| Load Regulation                                   | ΔV <sub>O</sub> -I <sub>O</sub>  | V <sub>IN</sub> =-33V, I <sub>O</sub> =0.005~1.5A                                        | —     | 60    | 270   | mV    |
| Line Regulation                                   | ΔV <sub>O</sub> -V <sub>IN</sub> | V <sub>IN</sub> =-27~-38V, I <sub>O</sub> =0.5A                                          | —     | 5     | 240   | mV    |
| Ripple Rejection                                  | RR                               | V <sub>IN</sub> =-33V, I <sub>O</sub> =0.5A, e <sub>m</sub> =2V <sub>p-p</sub> , f=120Hz | 54    | 64    | —     | dB    |
| Output Noise Voltage                              | V <sub>NO</sub>                  | V <sub>IN</sub> =-33V, I <sub>O</sub> =0.5A, BW=10Hz~100kHz                              | —     | 300   | —     | μV    |
| Average Temperature Coefficient of Output Voltage | ΔV <sub>O</sub> /ΔT              | V <sub>IN</sub> =-33V, I <sub>O</sub> =5mA                                               | —     | -0.8  | —     | mV/°C |

## ■ TEST CIRCUIT

1. Output Voltage, Line Regulation, Load Regulation, Quiescent Current, Average Temperature Coefficient of Output Voltage, Output Noise Voltage
2. Ripple Rejection

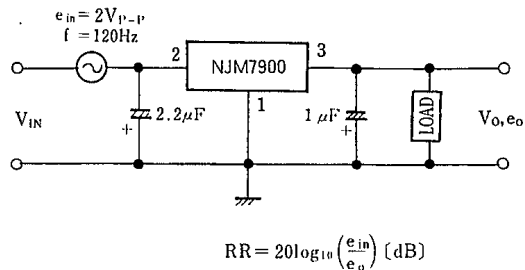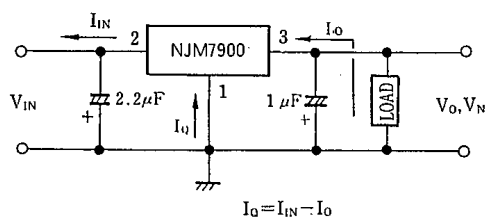


## ■ POWER DISSIPATION VS. AMBIENT TEMPERATURE

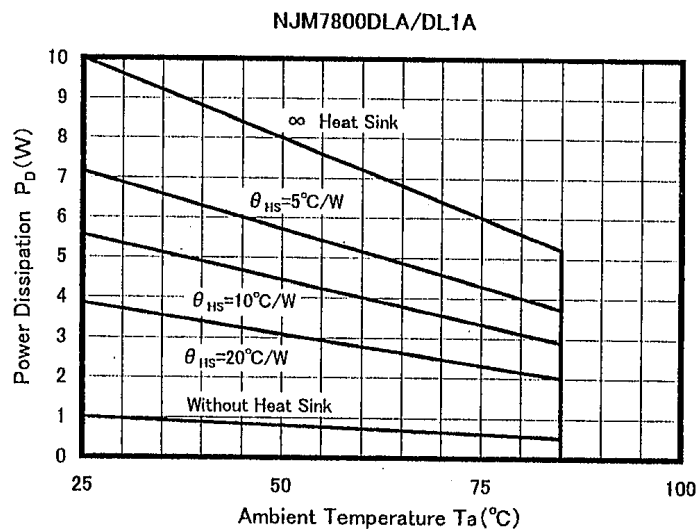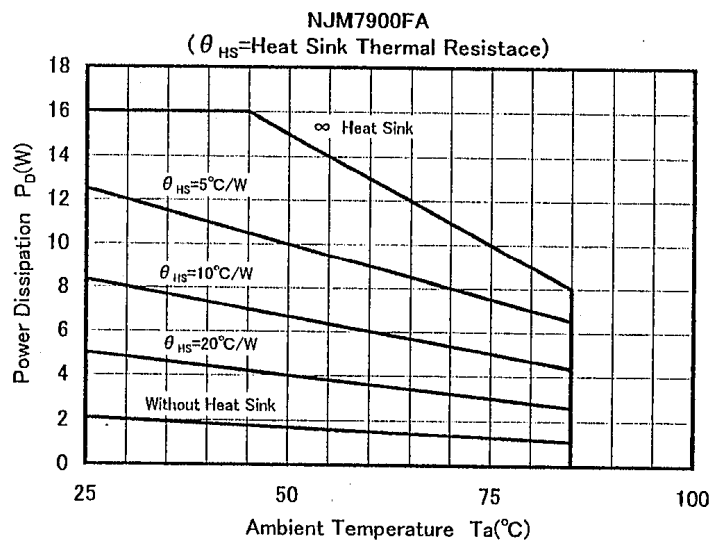

## TYPICAL CHARACTERISTICS


### NJM7900 Output Characteristics

( $I_O = 0.5A$ ,  $T_j = 25^\circ C$ )

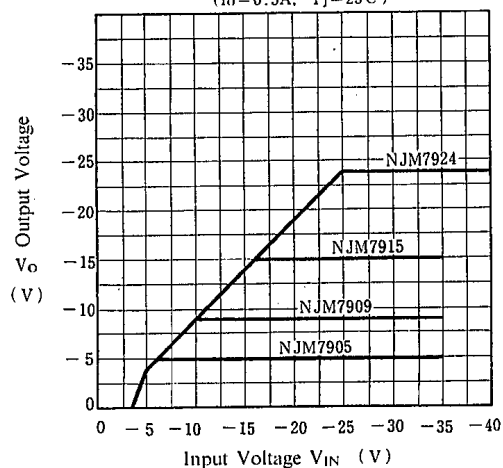


### NJM7912 Output Voltage vs. Low Input Voltage

( $T_j = 25^\circ C$ )

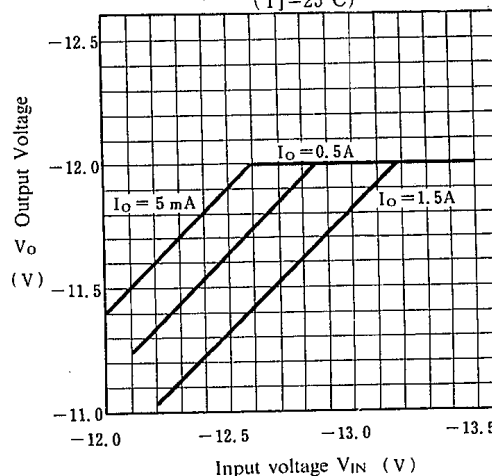


### NJM7905/15/24 Load Characteristics

( $T_j = 25^\circ C$ )

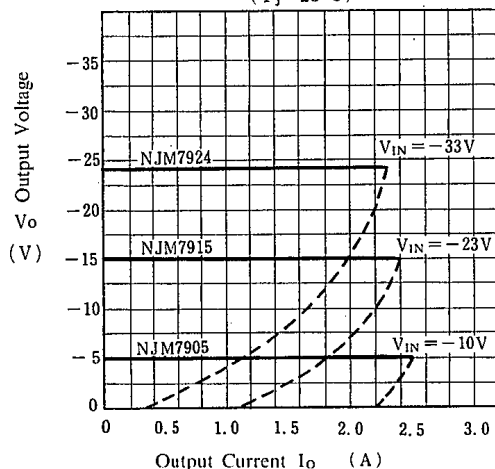


### NJM7900 Series Short Circuit Output Current

( $T_j = 25^\circ C$ )

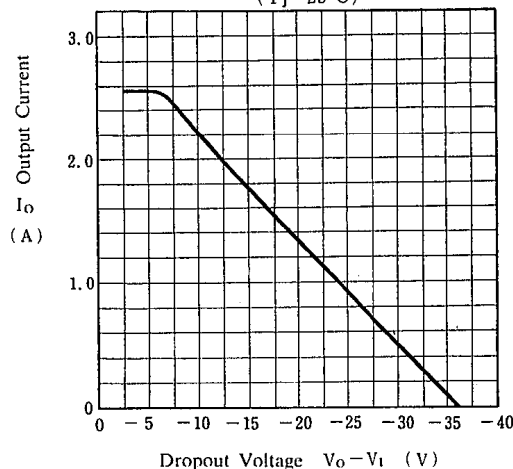


### NJM7905/12/24 Output Voltage vs. Junction Temperature

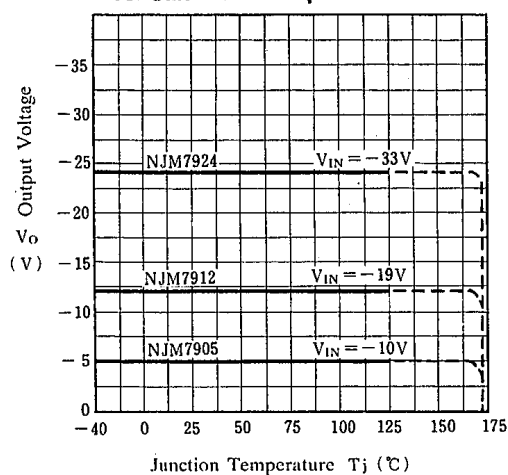

### NJM7905/15/24 Ripple Rejection vs. Frequency


( $I_O = 500mA$ ,  $e_{IN} = 2V_{p-p}$ ,  $T_j = 25^\circ C$ )

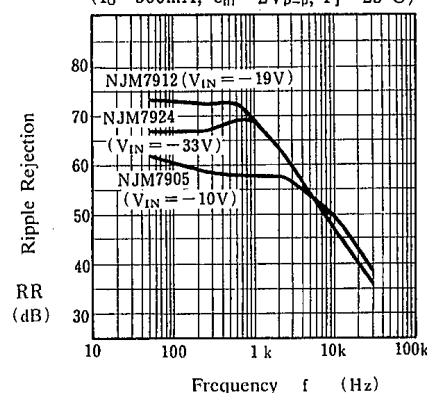


## ■ TYPICAL CHARACTERISTICS

**NJM7905 Dropout Characteristics**

( $T_j = 25^\circ\text{C}$ )

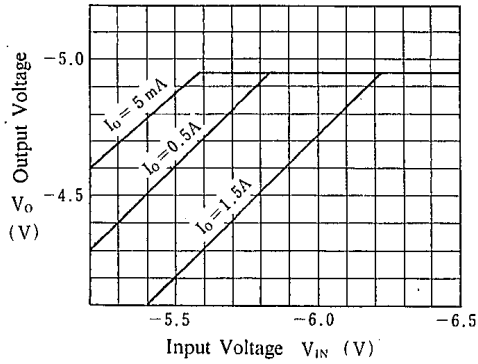


**NJM7905 Output Voltage vs. Temperature**

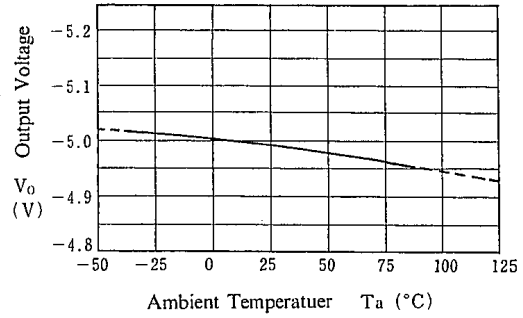

**Quiescent Current vs. Input Voltage**

( $I_o = 0\text{ mA}$ ,  $T_j = 25^\circ\text{C}$ )

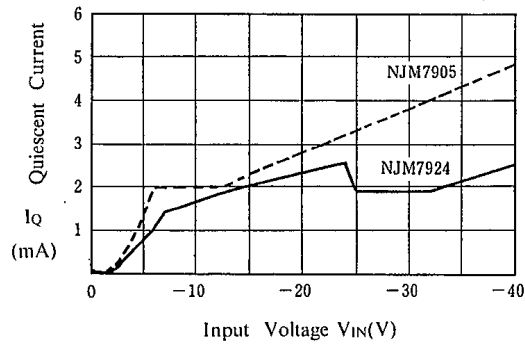

## MEMO

[CAUTION]  
The specifications on this databook are only given for information , without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.