

THYRISTOR MODULE (NON-ISOLATED TYPE)

PWB60A

TOP





PWB60A is a Thyristor module suitable for low voltage, 3 phase recifier applications.

- $I_{T(AV)}$ 60A (each device)
- High Surge Current 1800 A (60Hz)
- Easy Construction
- Non-isolated. Mounting base as common Anode terminal

(Applications)

Welding power Supply
Various DC power Supply

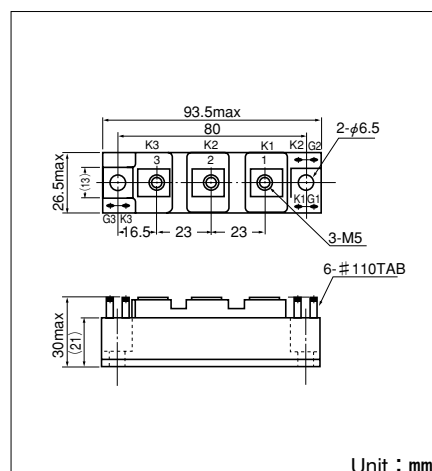

Maximum Ratings

Symbol	Item	Ratings		Unit
		PWB60A30	PWB60A40	
VRRM	Repetitive Peak Reverse Voltage	300	400	V
VRSM	Non-Repetitive Peak Reverse Voltage	360	480	V
VDRM	Repetitive Peak Off-State Voltage	300	400	V

Symbol	Item	Conditions	Ratings	Unit
$I_{T(AV)}$	Average On-State Current	Single phase, half wave, 180° conduction, $T_c : 123^\circ\text{C}$	60	A
$I_{T(RMS)}$	R.M.S. On-State Current	Single phase, half wave, 180° conduction, $T_c : 123^\circ\text{C}$	94	A
I_{TSM}	Surge On-State Current	$\frac{1}{2}$ cycle, 50Hz/60Hz, peak value, non-repetitive	1640/1800	A
I^2t	I^2t		13,500	A ² S
P_{GM}	Peak Gate Power Dissipation		10	W
$P_{G(AV)}$	Average Gate Power Dissipation		1	W
I_{FGM}	Peak Gate Current		3	A
V_{FGM}	Peak Gate Voltage (Forward)		10	V
V_{RGM}	Peak Gate Voltage (R.M.S.)		5	V
di/dt	Critical Rate of Rise of On-State Current	$I_G = 150\text{mA}$, $T_j = 25^\circ\text{C}$, $V_D = \frac{1}{2}V_{DRM}$, $dI_G/dt = 1\text{A}/\mu\text{s}$	50	A/ μs
T_j	Operating Junction Temperature		-30 to +150	$^\circ\text{C}$
T_{stg}	Storage Temperature		-30 to +125	$^\circ\text{C}$
	Mounting torque	Mounting (M6)	Recommended Value 2.5-3.9 (25-40)	N·m (kgf·cm)
		Terminal (M5)	Recommended Value 1.5-2.5 (15-25)	
	Mass		170	g

Electrical Characteristics

Symbol	Item	Conditions	Ratings	Unit
I_{DRM}	Repetitive Peak Off-State Current, max.	at V_{DRM} , single phase, half wave, $T_j = 150^\circ\text{C}$	10	mA
I_{RRM}	Repetitive Peak Reverse Current, max.	at V_{DRM} , single phase, half wave, $T_j = 150^\circ\text{C}$	10	mA
V_{TM}	Peak On-State Voltage, max.	On-State Current 180A, $T_j = 25^\circ\text{C}$ Inst. measurement	1.25	V
I_{GT}/V_{GT}	Gate Trigger Current/Voltage, max.	$T_j = 25^\circ\text{C}$, $I_T = 1\text{A}$, $V_D = 6\text{V}$	150/2	mA/V
V_{GD}	Non-Trigger Gate, Voltage. min.	$T_j = 150^\circ\text{C}$, $V_D = \frac{1}{2}V_{DRM}$	0.25	V
t_{gt}	Turn On Time, max.	$I_T = 60\text{A}$, $I_G = 150\text{mA}$, $T_j = 25^\circ\text{C}$, $V_D = \frac{1}{2}V_{DRM}$, $dI_G/dt = 1\text{A}/\mu\text{s}$	10	μs
dv/dt	Critical Rate of Rise of Off-State Voltage, min.	$T_j = 150^\circ\text{C}$, $V_D = \frac{2}{3}V_{DRM}$, Exponential wave.	50	V/ μs
I_H	Holding Current, typ.	$T_j = 25^\circ\text{C}$	100	mA
$R_{th(j-c)}$	Thermal Impedance, max.	Junction to case ($\frac{1}{3}$ Module)	0.35	$^\circ\text{C}/\text{W}$

