


Fast Recovery Diodes $V_{RM}: 200 \sim 2000V$ $I_o: 0.2 \sim 0.8A$


AU/AS/RC/RU/EP/EU/EH/RF

Rating/ Characteristics	Absolute Maximum Ratings						Electrical Characteristics (Ta = 25°C)						Others							
	V _{RM} (V)	V _{RM} (V)	I _O (A)	I _{FSM} (A)	T _J (°C)	T _{stg} (°C)	V _F (V)	I _F (A)	I _R (μA)	I _{R(H)} (μA)	t _{rr} (μs)	I _F /I _{RP} (mA)	Outline Drawing	Weight(g)	Taping	Note				
Type No.				50Hz Half Sine Wave Single Pulse			max	I _F (A)	V _R = V _{RM} max	V _R = V _{RM} Ta = 100°C max		I _F /I _{RP} (mA)								
AU01Z	250	200	0.5	15	-40 ~ +150		1.7	0.5	10	150	0.4	10/10	③②	0.13	Available	For High-Frequency Rectification				
AU01	450	400																		
AU01A	650	600																		
AU02Z	250	200	0.8	25			1.3	0.8		250	0.4		50	1.5			300	4.0	③③	0.44
AU02	450	400																		
AU02A	650	600																		
AS01Z	250	200	0.6	20			1.5	0.6		200	0.4		100/100	0.2			100/100	③④	0.3	
AS01	450	400																		
AS01A	650	600																		
RC 2	2000	2000	0.2	5	-40 ~ +140		2.0	0.2	5	50	0.2	10/10	③⑤	0.2						
RU 1	450	400	0.25	15													2.5	0.25	200	0.4
RU 1A	650	600																		
RU 1B	850	800																		
RU 1C	1050	1000	0.2	5			2.5	0.25		200	0.4		10/10	0.2			100/100	③⑥	0.2	
EP01C	1050	1000																		
EU 1Z	250	200																		
EU 1	450	400	0.25	15			2.5	0.25		200	0.4		10/10	0.2			100/100	③⑦	0.3	
EU 1A	650	600																		
EU01Z	250	200																		
EU01	450	400	0.6	30	1.35	0.6	200	4.0	10/10	0.4	100/100	③⑧	0.44							
EU01A	650	600																		
EH 1Z	250	200																		
EH 1	450	400	0.6	15	2.0	0.6	200	4.0	10/10	0.4	100/100	③⑨	0.44							
EH 1A	650	600																		
RF 1Z	250	200																		
RF 1	450	400	0.6	15	2.0	0.6	200	4.0	10/10	0.4	100/100	③⑩	0.44							
RF 1A	650	600																		
RF 1B	850	800																		


Outline Drawing ③②

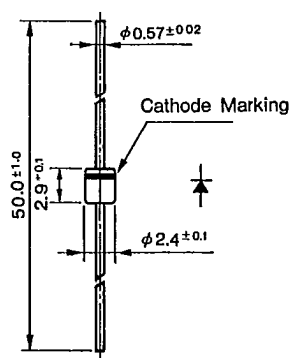


Outline Drawing ③③




Outline Drawing ③④

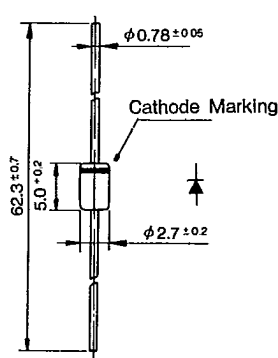


Outline Drawing ③⑤

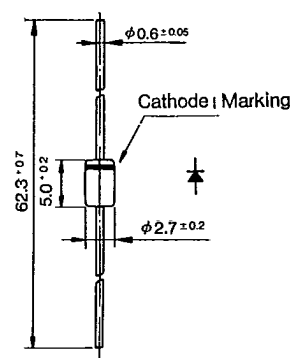

Outline Drawing ③⑥




Outline Drawing ③⑦





③②~③⑦ Plastic Molded,
Flammability: UL94V-0 or Equivalent


AU01
Series
AU02
Series
AS01
Series

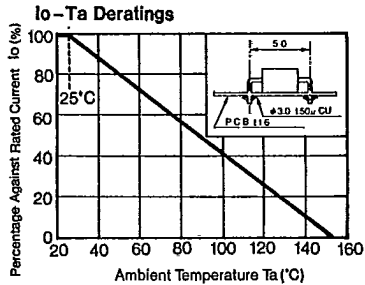



RC 2

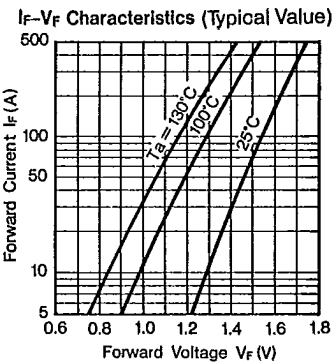


RC 2, RU 1 Series **Io-Ta Deratings**

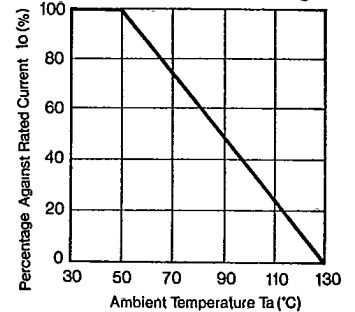



RU 1
Series

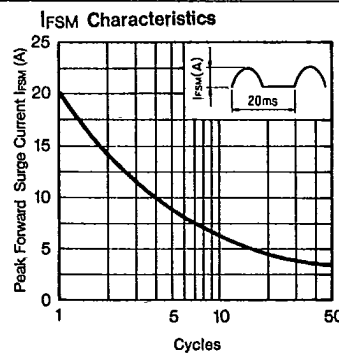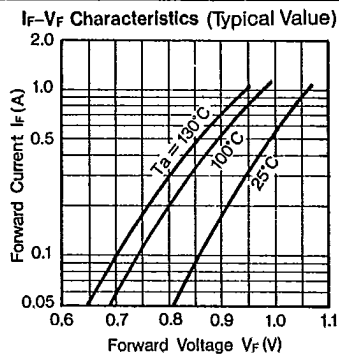


EPO1C
EU 1 Series
EUO1 Series **Io-Ta Deratings**

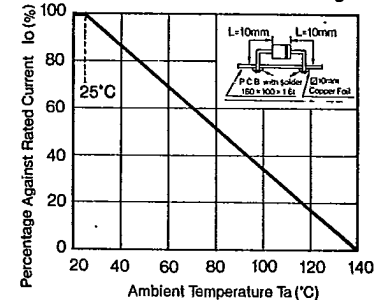



EH 1
Series

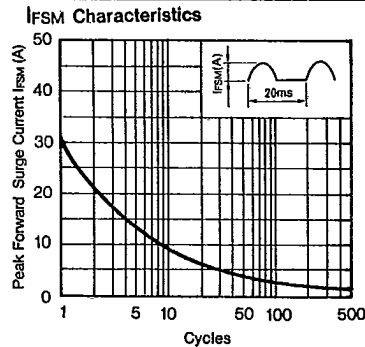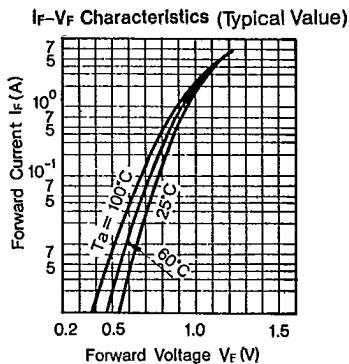


Io-Ta Deratings

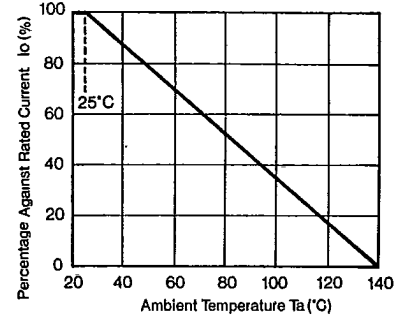

PF 1
Series

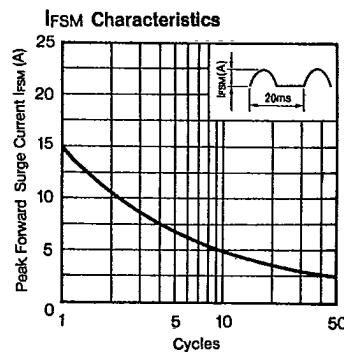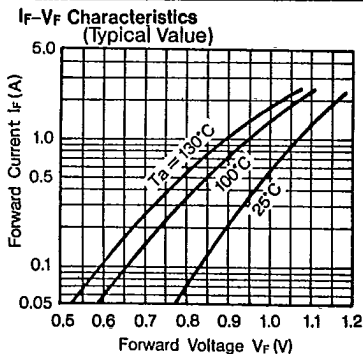

Io-Ta Deratings

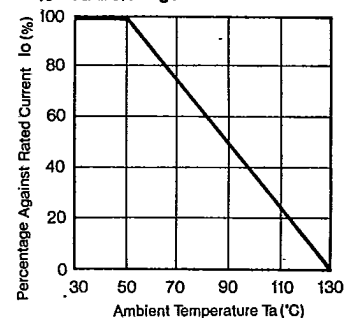


Symbols/trr Measurement Circuit

Symbols

V_{RSM}	Peak Reverse Surge Voltage	I_{RSM}	Peak Reverse Surge Current	T_{stg}	Storage Temperature
V_{RM}	Peak Reverse Voltage	I_R	Reverse Current	t_{rr}	Reverse Recovery Time
V_{P-P}	Reverse Voltage (Peak to Peak)	I_{RP}	Peak Reverse Current	C_t	Total Capacitance Between Terminals
V_R	Reverse Voltage	$I_{R(H)}$	Reverse Current (High Temperature)	$R_{th(j-c)}$	Thermal Resistance, Junction to Case
V_F	Forward Voltage	I_Z	Avalanche Current	r_z	Temperature Coefficient of Breakdown Voltage
V_B	Breakdown Voltage	I_{ZSM}	Allowable Avalanche Current	R_z	Equivalent Resistance of Breakdown Region
I_o	Average Rectified Forward Current	T_a	Ambient Temperature	$P_{F(AV)}$	Average Forward Power Dissipation
I_F	Forward Current	T_j	Junction Temperature	I_t^2	I_t^2 limiting Value
$I_{F(AV)}$	Average Forward Current	T_{opr}	Operating Ambient Temperature		
I_{FSM}	Peak Forward Surge Current	T_c	Case Temperature		

Reverse Recovery Time Measurement Circuit

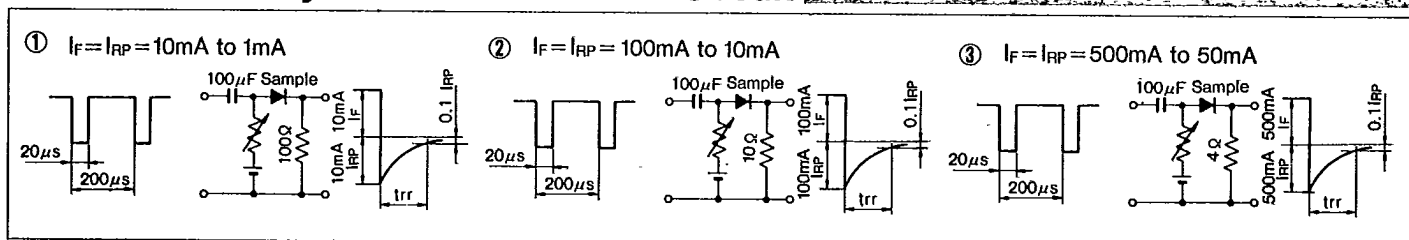

Taping Specifications

Excluding High Voltage Diodes


Designation	Dimension (in mm)	Packaging Dimension and Marking	Quantity
V Add Suffix [V] to Type No.	Tape Carrier Method (1) Right side of taping direction is cathode. (2) Place electrode side down when casing. (3) Provide leader tape of 150~200mm at beginning of tape. (4) Provide space of more than 10 pitches each for beginning and end of tape.	Reel	1,800 pcs per reel
V Add Suffix [V] to Type No.	Axial Taping	Reel	5,000 pcs per reel (2.7 ϕ body) 3,000 pcs per reel (4.0 ϕ body)

Taping Specifications

Designation	Dimension (in mm)	Packaging Dimension and Marking	Quantity
V1 Add Suffix [V1] to Type No.	Axial Taping 	Ammunition Pack 	2,000 pcs per box (2.7 ϕ body) 1,000 pcs per box (4.0 ϕ body)
VO Add Suffix [VO] to Type No.	Axial Taping 	Ammunition Pack 	2,000 pcs per box (2.7 ϕ body) (2.4 ϕ body)
V3 Add Suffix [V3] to Type No.	Axial Taping 	Reel 	1,500 pcs per reel (5.2 ϕ body)
V4 Add Suffix [V4] to Type No.	Axial Taping 	Ammunition Pack 	1,000 pcs per box (5.2 ϕ body)
W Add Suffix [W] to Type No.	Radial Taping 	Ammunition Pack 	4,000 pcs per box (2.7 ϕ body) (0.6 ϕ lead)
WS Add Suffix [WS] to Type No.	Radial Taping (Applicable to AO Series) 	Ammunition Pack 	2,500 pcs per box (2.4 ϕ body)
WK Add Suffix [WK] to Type No.	Radial Taping (Applicable to AO Series) 		


Marking Guide

1 Small TMD




- ① Type Designation (in abbreviation)
AM01 is abbreviated as M.
- ② Class Designation
Z: 200V, No Letter: 400V, A: 600V
- ③ A: Year (Last Number of AD Year)
B: Month (Jan. to Sept. are represented by numbers 1 to 9 respectively, and Oct., Nov., and Dec. are abbreviated as O, N and D respectively)
- ④ Cathode Band: Successive Band, however AU02 Type is Non-Successive Band.

2 E/EO Type TMD



- ① Type Designation (in abbreviation)
EM01 is abbreviated as MO, EM2 is abbreviated as M2.
- ② Class Designation
Z: 200V, No Letter: 400V, A: 600V
B: 800 V, C: 1000V, F: 1500V
However, EU02A to be marked 2A, and EU2YX to be marked Y.
- ③ Abbreviations Representing Production Period
A: Year (Last Number of AD Year)
B: Month (1~9, O, N, D)
- ④ Production Period Divided in 3 ten day terms
• : 1st 10days •• : 2nd 10days ••• : 3rd 10days


3 R Type TMD



- ① Type Designation: Mark in 2 sets
- ② Production Period: Mark in 4 sets
A: Year (Last Number of AD Year)
B: Month (1~9, O, N, D)
- ③ Production Period Divided in 3 ten day terms
• : 1st 10days •• : 2nd 10days ••• : 3rd 10days
- ④ Cathode Band Color: Silver: For Power Supply
Yellow: For Middle Speed
Red : For High Speed and Ultra-High Speed


4 RB40/60

(RB40 Series)




- ① Peak Reverse Voltage Designation
1, 2, 4, 6, C
Production Period
- ② Year (Last Number of AD Year)
- ③ Month (1~9, O, N, D)
- ④ Divided in 3 ten day terms
A: 1st 10days, B: 2nd 10days
C: 3rd 10days
Color Designation: Silver

(RB60 Series)




Dot Designation RB601 Violet
RB602 No Color
RB604 Blue
RB606 White

5 RBV/RBA




- ① Type Designation
- ② Lot Number
1st : Year (Last Number of AD Year)
2nd: Month (1~9, O, N, D)
3rd : Divided 1~3 ten day Terms
A: 1st 10 days B: 2nd 10 days
C: 3rd 10 days
- ③ In-Put Designation

6 T0220 Type (FM or CT Type)




- ① Type Designation
Show FMU-12S as FMU12S.
- ② Polarity: Rectifier Symbols
- ③ Lot Number (Laser Marking)
1st : Year (Last Number of AD Year)
2nd : Month (0~9, O, N, D)
3rd, 4th: Day

7 T0220 Type (FM or CT Type, single chip)




- ① Type Designation: Omit Last Letter
Show FML-G12S as FMLG12.
- ② Last Letter of Type Designation
- ③ Polarity: Rectifier Symbols
- ④ Lot Number (Laser Marking)
1st : Year (Last Number of AD Year)
2nd : Month (0~9, O, N, D)
3rd, 4th: Day

8 T03P Type (FM or CT Type)




- ① Type shown in full designation
However, CTB-34/34S/34M are marked as CTB-34, CTU-G3DR is marked as CTUG3DR.
- ② Polarity: Rectifier Symbols
- ③ Lot Number:
1) M, U, G and L Types
First Number : Last Digit of AD Year
Second Number : Month
Third and Fourth Numbers: Day
Fifth Number : None
2) For types CTB-34/34S/34M, the fifth letter shows type designation. If no fifth number, the type is CTB-33 or CTB-34.
3) Marking Color: Silver

9 MI-10/15 Type



- ① MI-10/15 is die-stamped on the top of the case.
- ② Rectifier Symbols
- ③ Lot Number:
First Number : Peak Reverse Voltage:
(Letter) 0=50V, 1=100V, 2=200V,
4=400V, 6=600V, C=1000V
Second Number : Last Digit of AD Year
Third Number : Month
Fourth and Fifth Numbers: Day
Sixth Number : Production number and
U: Voltage Doubler Type

10 SFP Type



- ① Type Designation:
SFPB-64 is abbreviated at B64.
- ② Cathode Band