

2 AMP SILICON BRIDGE RECTIFIERS

FEATURES

- PRV Ratings from 50 to 1000 Volts
- Surge overload rating to 60 Amps peak
- Reliable low cost molded plastic construction
- Ideal for printed circuit board applications


- **UL RECOGNIZED - FILE #E124962**

MECHANICAL DATA


- Case: Molded plastic, U/L Flammability Rating 94V-0
- Terminals: Round silver plated pins
- Soldering: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Marked on case
- Mounting Position: Any
- Weight: 0.1 Ounces (2.8 Grams)

MECHANICAL SPECIFICATION


ACTUAL SIZE OF SB2 PACKAGE



SERIES SB200 - SB210

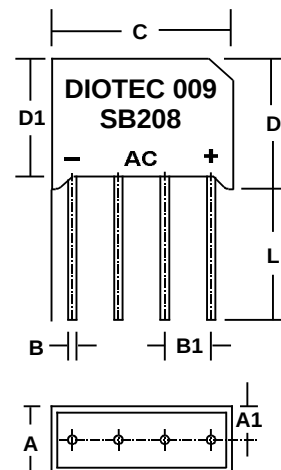

SYM	MILLIMETERS		INCHES	
	MIN	MAX	MIN	MAX
A	5.99	7.01	0.236	0.276
A1	2.99	3.51	0.118	0.138
B	0.71	0.89	0.028	0.035
B1	3.55	4.00	0.140	0.160
C	16.0	18.0	0.63	0.71
D	14.0	15.0	0.55	0.59
D1	13.2	13.7	0.52	0.54
L	12.7	n/a	0.50	n/a




MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60Hz, resistive or inductive load.
For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS							UNITS
Series Number		SB 200	SB 201	SB 202	SB 204	SB 206	SB 208	SB 210	
Maximum DC Blocking Voltage	V _{RM}	50	100	200	400	600	800	1000	VOLTS
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	
Maximum Peak Recurrent Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	
Average Forward Rectified Current @ T _A = 55° C	I _O	2							AMPS
Peak Forward Surge Current. Single 60Hz Half-Sine Wave Superimposed on Rated Load (JEDEC Method). T _J = 150° C	I _{FSM}	60							
Maximum Forward Voltage (Per Diode) at 1 Amp DC	V _{FM}	1.05							VOLTS
Maximum Average DC Reverse Current @ T _A = 25° C	I _{RM}	10							μA
At Rated DC Blocking Voltage @ T _A = 125° C		500							
Typical Thermal Resistance. Junction to Ambient (Note 1)	R _{θJA}	30							°C/W
Junction to Lead (Note 1)	R _{θJL}	11							
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150							°C

NOTES: (1) Bridge mounted on PC Board with 0.47" sq.(12mm sq.) copper pads.

3.01 0220



2 AMP SILICON BRIDGE RECTIFIERS

RATING & CHARACTERISTIC CURVES FOR SB200 - SB210 SERIES

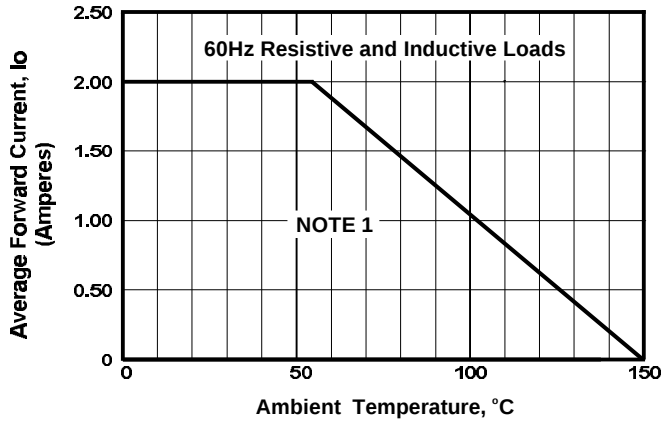


FIGURE 1. FORWARD CURRENT DERATING CURVE

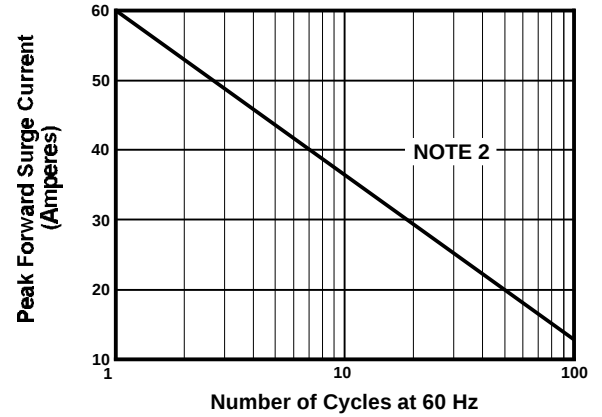


FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT

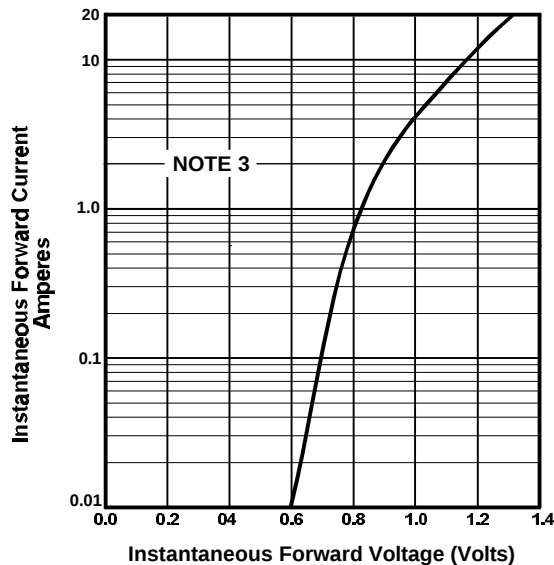


FIGURE 3. TYPICAL FORWARD CHARACTERISTIC PER DIODE

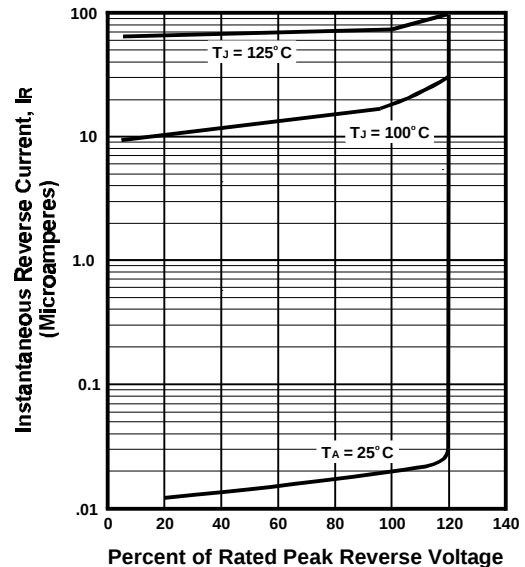


FIGURE 4. TYPICAL REVERSE CHARACTERISTICS

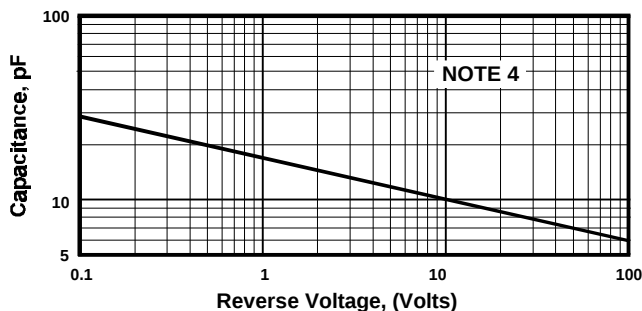


FIGURE 5. TYPICAL JUNCTION CAPACITANCE PER DIODE

NOTES

- (1) Bridge Mounted on PC Board With 0.47" Sq. (12mm Sq.) Copper Pads
- (2) $T_J = 150^\circ\text{C}$
- (3) $T_J = 25^\circ\text{C}$; Pulse Width = 300 μSec , 1% Duty Cycle
- (4) $T_J = 25^\circ\text{C}$; $f = 1\text{ MHz}$; $V_{\text{SIG}} = 50\text{mV}_{\text{P-P}}$