

High-side Power Switch with Diagnostic Function and Built-in Zener Diode SI-5154S

Features

- Built-in diagnostic function to detect short and open circuiting of loads and output status signals
- Low saturation PNP transistor use
- Allows direct driving using LS-TTL and C-MOS logic levels
- Built-in overcurrent and thermal protection circuits
- Built-in protection against reverse connection of power supply
- $T_j = 150^\circ\text{C}$ guaranteed
- Built-in Zener diode
- TO-220 equivalent full-mold package not require insulation mica

Absolute Maximum Ratings

($T_a = 25^\circ\text{C}$)

Parameter	Symbol	Ratings	Unit	Conditions
Power supply voltage	V_B	-13 to +40	V	
Input terminal voltage	V_{IN}	-0.3 to V_B	V	
DIAG terminal voltage	V_{DIAG}	6	V	
Collector-emitter voltage	V_{CE}	$V_B - V_Z$	V	Refer to "Surge clamp voltage" in Electrical Characteristics
Output current	I_O	2.5	A	
Power Dissipation	P_{D1}	22	W	With infinite heatsink ($T_c = 25^\circ\text{C}$)
	P_{D2}	1.8	W	Stand-alone without heatsink
Junction temperature	T_j	-40 to +150	$^\circ\text{C}$	
Operating temperature	T_{OP}	-40 to +100	$^\circ\text{C}$	
Storage temperature	T_{stg}	-40 to +150	$^\circ\text{C}$	

Electrical Characteristics



($T_a = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Ratings			Unit	Conditions	
		min	typ	max			
Operating power supply voltage	V_{Bopr}	6.0		30	V		
Quiescent circuit current	I_q		5	12	mA	$V_{Bopr} = 14\text{V}$, $V_{IN} = 0\text{V}$	
Saturation voltage of output transistor	$V_{CE(sat)}$			0.3	V	$I_O \leq 1.0\text{A}$, $V_{Bopr} = 6$ to 16V	
				0.72	V	$I_O \leq 2.5\text{A}$, $V_{Bopr} = 6$ to 16V	
Output leak current	$I_{O, leak}$			2	mA	$V_{CE} = 16\text{V}$, $V_{IN} = 0\text{V}$	
Input voltage	Output ON	V_{IH}	2.0		V_B	$V_{Bopr} = 6$ to 16V	
	Output OFF	V_{IL}	-0.3		0.8	V	$V_{Bopr} = 6$ to 16V
Input current	Output ON	I_{IH}			1	mA	$V_{IN} = 5\text{V}$
	Output OFF	I_{IL}	-0.1			mA	$V_{IN} = 0\text{V}$
Overcurrent protection starting current	I_S	2.6			A	$V_{Bopr} = 14\text{V}$, $V_O = V_{Bopr} - 1.5\text{V}$	
Thermal protection starting temperature	T_{TSD}	150			$^\circ\text{C}$	$V_{Bopr} \geq 6\text{V}$	
Open load detection resistor	R_{open}			30	k Ω	$V_{Bopr} = 6$ to 16V	
Output transfer time	T_{ON}		8	30	μs	$V_{Bopr} = 14\text{V}$, $I_O = 1\text{A}$	
	T_{OFF}		15	30	μs	$V_{Bopr} = 14\text{V}$, $I_O = 1\text{A}$	
DIAG output voltage	V_{DH}	4.5		6	V	$V_{CC} = 6\text{V}$, $V_{Bopr} = 6$ to 16V	
	V_{DL}			0.3	V	$V_{CC} = 6\text{V}$, $V_{Bopr} = 6$ to 16V, $I_{DO} = 2\text{mA}$	
DIAG output transfer time	T_{PLH}			30	μs	$V_{Bopr} = 14\text{V}$, $I_O = 1\text{A}$	
	T_{PHL}			30	μs	$V_{Bopr} = 14\text{V}$, $I_O = 1\text{A}$	
Minimum load inductance	L	1			mH		
Surge clamp voltage *1	V_Z	28	34	40	V	$I_c = 5\text{mA}$	

Note:

- *1. The Zener diode for surge clamping has an energy capability of 200 mJ (single pulse).
- * The rule of protection against reverse connection of power supply is $V_B = -13\text{V}$, one minute.
- * This driver is exclusively used for ON/OFF control.


External Dimensions (unit: mm)



1. GND
 2. V_{IN}
 3. V_O
 4. DIAG
 5. V_B
- a: Type No.
b: Lot No.

(Forming No. 1111)


Standard Circuit Diagram

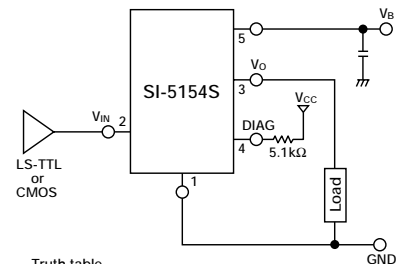

Truth table

V_{IN}	V_O
H	H
L	L


Diagnostic Function

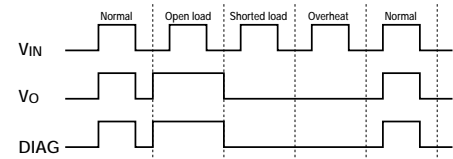


Mode	V_{IN}	V_O	DIAG
Normal	L	H	L
Open load	L	H	L
Shorted load	L	L	L
Overheat	L	L	L

- DIAG output will be undetermined when a voltage exceeding 25V is applied to V_B terminal.


■ Quiescent Circuit Current

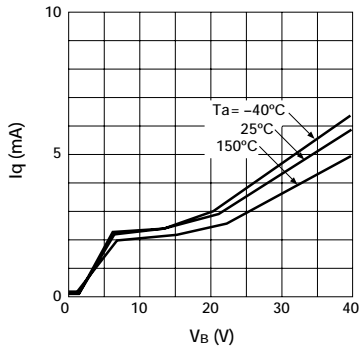


■ Circuit Current

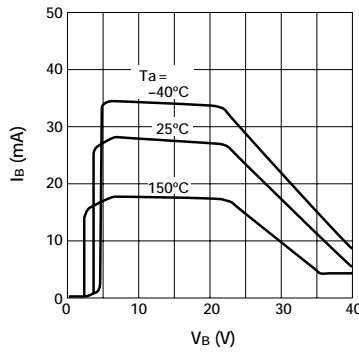


■ Saturation Voltage of Output Transistor

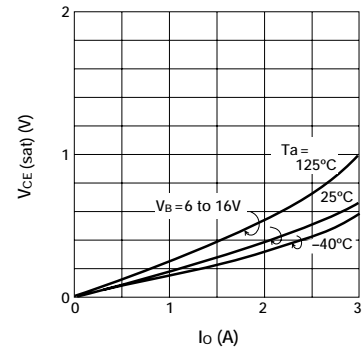


■ Overcurrent Protection Characteristics ($T_a = -40^\circ\text{C}$)

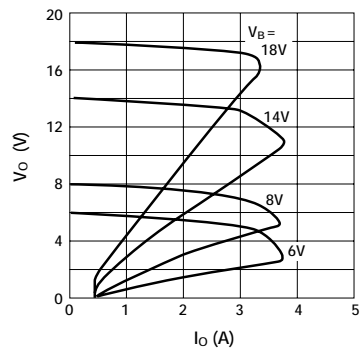


■ Overcurrent Protection Characteristics ($T_a = 25^\circ\text{C}$)

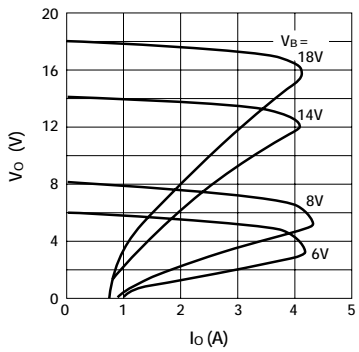


■ Overcurrent Protection Characteristics ($T_a = 125^\circ\text{C}$)

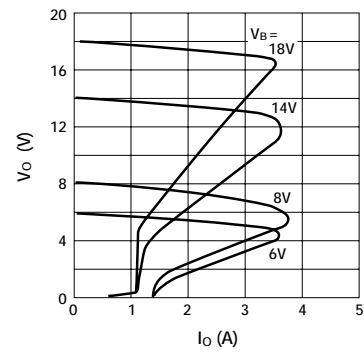


■ Threshold input voltage

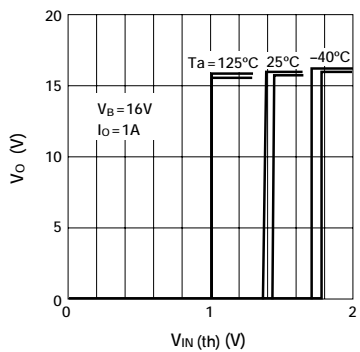


■ Input Current (Output ON)

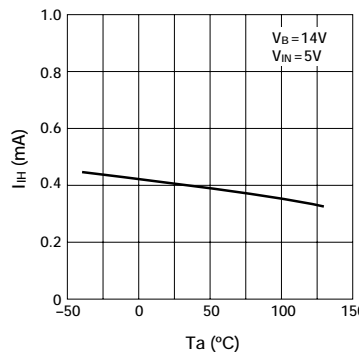


■ Input Current (Output OFF)

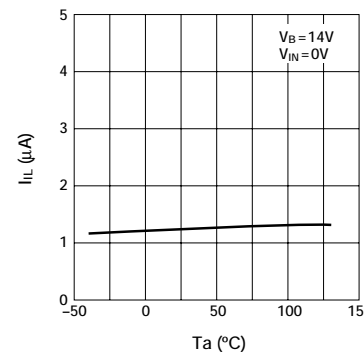

■ Output Terminal Leak Current

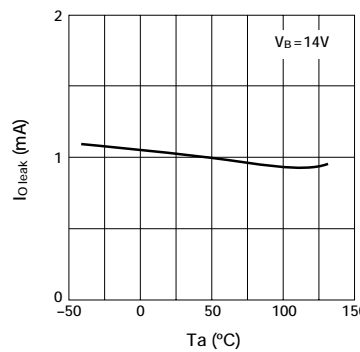

■ Saturation Voltage of DIAG Output

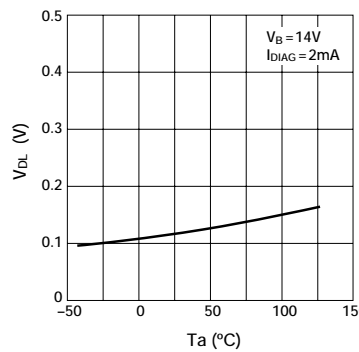

■ Thermal Protection Characteristics

