


# SMH Series


- Downsized from current standard SMG series
- Endurance with ripple current : 85°C 2000 hours
- For input filtering of power supplies
- Non solvent-proof type



## ◆SPECIFICATIONS

Items	Characteristics	
<b>Category</b>	-25 to +85°C	
<b>Temperature Range</b>	-25 to +85°C	
<b>Rated Voltage Range</b>	160 to 450V <sub>dc</sub>	
<b>Capacitance Tolerance</b>	±20% (M) (at 20°C, 120Hz)	
<b>Leakage Current</b>	I = 0.03CV or 3 mA, whichever is smaller. Where, I : Max. leakage current (μA), C : Nominal capacitance (μF), V : Rated voltage (V) (at 20°C after 5 minutes)	
<b>Dissipation Factor (tanδ)</b>	0.15max. (at 20°C, 120Hz)	
<b>Low Temperature Characteristics (Max. Impedance Ratio)</b>	Rated voltage (V <sub>dc</sub> )	160 to 250V    400 & 450V
	Z(-25°C)/Z(+20°C)	4                      6
	(at 120Hz)	
<b>Endurance</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 2000 hours at 85°C.	
	Capacitance change	≤±20% of the initial value
	D.F. (tanδ)	≤200% of the initial specified value
	Leakage current	≤The initial specified value
<b>Shelf Life</b>	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000 hours at 85°C without voltage applied.	
	Capacitance change	≤±20% of the initial value
	D.F. (tanδ)	≤200% of the initial specified value
	Leakage current	≤500% of the initial specified value


## ◆DIMENSIONS (Radial Lead Type=VB) [mm]

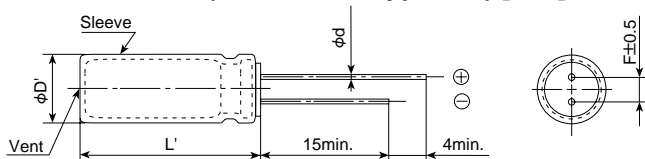

φD	20	22
φd	1.0	
F	10.0	
φD'	φD+0.5max.	
L'	L+2.0max.	

\*Note : The snap-in forming type, RC-type, is available upon request, RC-type fits two φ2mm holes and 10.5mm spacing.

## ◆PART NUMBERING SYSTEM

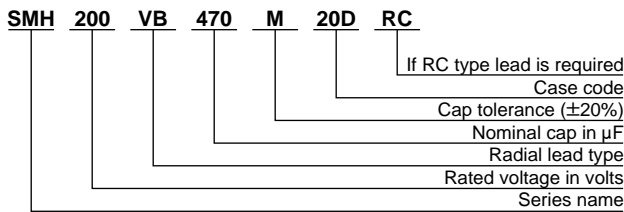

## ◆CASE CODE [mm]

Case code	Case size φDXL	Case code	Case size φDXL
20S	20×20	22S	22×20
20A	20×25	22A	22×25
20B	20×30	22B	22×30
20C	20×35	22C	22×35
20D	20×40	22D	22×40
20E	20×45	22E	22×45
20F	20×50	22F	22×50

## ◆RATED RIPPLE CURRENT MULTIPLIERS

- Frequency Multipliers

Frequency (Hz)	50	120	300	1k	10k	50k
160 to 250V <sub>dc</sub>	0.81	1.00	1.17	1.32	1.45	1.50
400 & 450V <sub>dc</sub>	0.77	1.00	1.16	1.30	1.41	1.43



SMH Series

◆STANDARD RATINGS

μF	V <sub>dc</sub>		160		200		250		400		450	
	φ	D	20	22	20	22	20	22	20	22	20	22
33											20×20 0.40	
47									20×20 0.48		20×25 0.52	22×25 0.57
56									20×25 0.57	22×25 0.62	20×30 0.62	22×25 0.65
68									20×25 0.64	22×25 0.69	20×35 0.72	22×30 0.69
82									20×30 0.75	22×25 0.78	20×35 0.79	22×30 0.80
100							20×20 0.67		20×35 0.87	22×30 0.90	20×40 0.92	22×35 0.94
120							20×25 0.85	22×20 0.83	20×40 1.02	22×35 1.03	20×45 1.07	22×40 1.11
150			20×20 0.82	22×20 0.87	20×25 0.94	22×25 1.03	20×45 1.20	22×40 1.24	20×50 1.24	22×45 1.29		
180	20×20 0.90	22×20 0.95	20×25 0.97	22×25 1.05	20×30 1.12	22×25 1.12	20×50 1.36	22×45 1.41			22×50 1.44	
220	20×25 1.07	22×25 1.16	20×25 1.07	22×25 1.16	20×30 1.24	22×30 1.33		22×50 1.59				
270	20×30 1.29	22×25 1.29	20×30 1.29	22×30 1.39	20×35 1.44	22×30 1.47						
330	20×30 1.43	22×30 1.53	20×35 1.49	22×30 1.53	20×40 1.70	22×35 1.71						
390	20×30 1.55	22×30 1.67	20×35 1.62	22×30 1.67	20×45 1.93	22×40 2.00	← Upper : Case size φD×L (mm) ← Lower : Rated ripple current (Arms) at 85°C, 120Hz					
470	20×35 1.78	22×30 1.83	20×40 1.90	22×35 1.92	20×50 2.19	22×45 2.29						