

3 AMP SUPER-EFFICIENT RECTIFIERS

FEATURES


- Low switching noise
- Low forward voltage drop
- Low thermal resistance
- High switching capability
- High surge capability
- High reliability

MECHANICAL SPECIFICATION

ACTUAL SIZE OF
DO-27 PACKAGE


SERIES SPR30 - SPR34

DO - 27

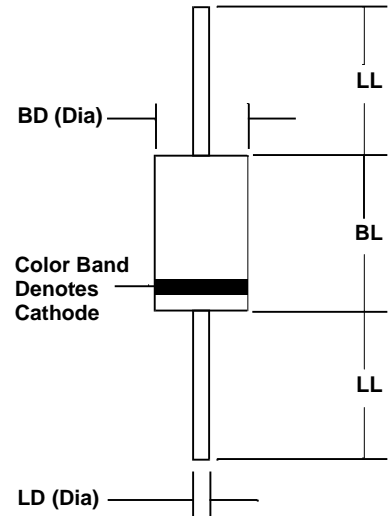

MECHANICAL DATA

- Case: JEDEC DO-27 molded plastic (U/L Flammability Rating 94V-0)
- Terminals: Plated axial leads
- Solderability: Per MIL-STD 202 Method 208 guaranteed
- Polarity: Color band denotes cathode
- Mounting Position: Any
- Weight: 0.04 Ounces (1.12 Grams)

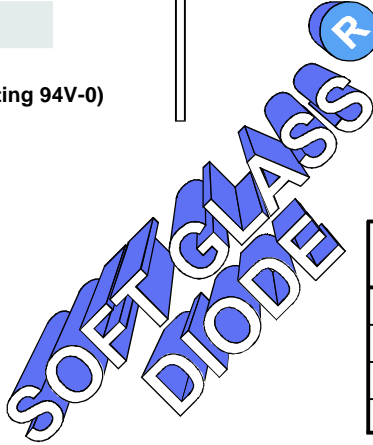

Sym	Minimum		Maximum	
	In	mm	In	mm
BL			0.365	9.28
BD			0.205	5.2
LL	1.00	25.4		
LD	0.048	1.2	0.052	1.3


MAXIMUM RATINGS & ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60Hz, resistive or inductive load.
 For capacitive loads, derate current by 20%.

PARAMETER (TEST CONDITIONS)	SYMBOL	RATINGS					UNITS	
		SPR30	SPR31	SPR32	SPR33	SPR34		
Series Number		SPR30	SPR31	SPR32	SPR33	SPR34		
Maximum DC Blocking Voltage	V _{RM}	50	100	200	300	400	VOLTS	
Maximum RMS Voltage	V _{RMS}	35	70	140	210	280		
Maximum Peak Recurrent Reverse Voltage	V _{RRM}	50	100	200	300	400		
Average Forward Rectified Current @ T _A = 55 °C	I _O	3					AMPS	
Peak Forward Surge Current (8.3mS single half sine wave superimposed on rated load)	I _{FSM}	75						
Maximum Forward Voltage at 3 Amps DC	V _{FM}	1.0		1.25			VOLTS	
Maximum Average DC Reverse Current At Rated DC Blocking Voltage	I _{RM}				5.0			μA
					@ T _C = 25 °C			
Typical Thermal Resistance, Junction to Ambient	R _{θJA}	20					°C/W	
Typical Junction Capacitance (Note 1)	C _J	100					pF	
Maximum Reverse Recovery Time (I _F =0.5A, I _R =1A, I _{RR} =0.25A)	T _{RR}	35					nSec	
Junction Operating and Storage Temperature Range	T _J , T _{STG}	-65 to +150					°C	

NOTES: (1) Measured at 1 MHz and an applied reverse voltage of 4 volts.

4.975esa3



3 AMP SUPER EFFICIENT RECTIFIERS

RATING & CHARACTERISTIC CURVES FOR SERIES SPR30 - SPR34

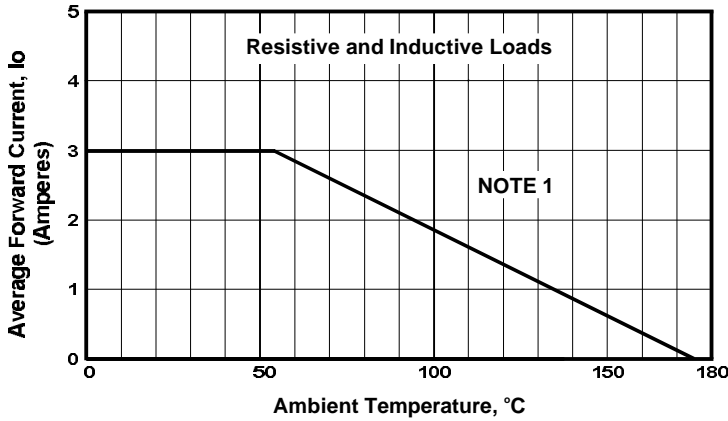


FIGURE 1. FORWARD CURRENT DERATING CURVE

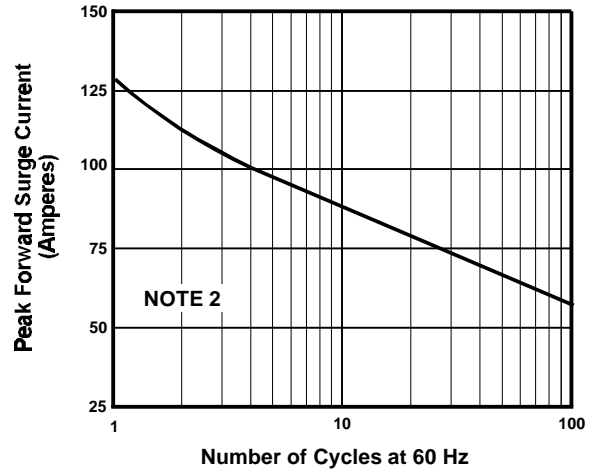


FIGURE 2. MAXIMUM NON-REPETITIVE SURGE CURRENT

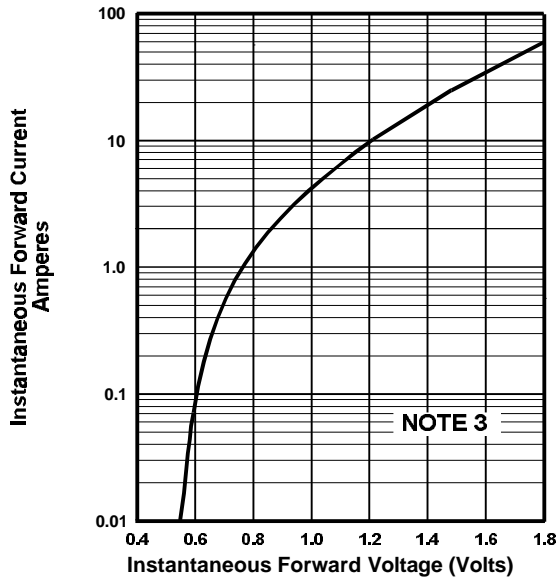


FIGURE 3. TYPICAL FORWARD CHARACTERISTICS

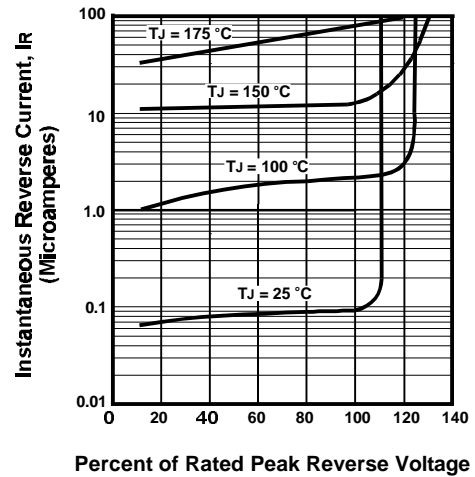


FIGURE 4. TYPICAL REVERSE CHARACTERISTICS

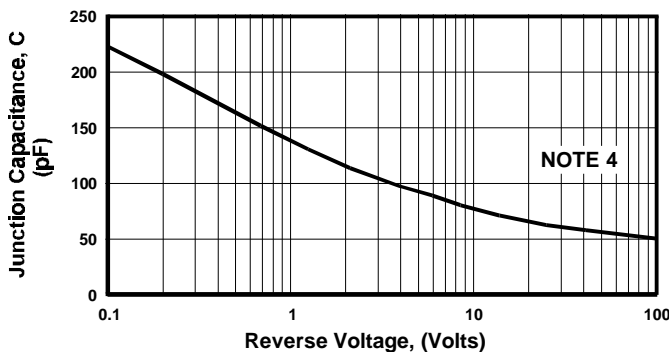


FIGURE 5. TYPICAL JUNCTION CAPACITANCE

NOTES

- (1) Single Phase, Half Wave, 60 Hz; Lead Length = 0.375" (9.5mm)
- (2) JEDEC Method, 8.3 mSec. Single Half Sine Wave; $T_A = 55^\circ\text{C}$
- (3) $T_J = 25^\circ\text{C}$, Pulse Width = 300 μSec , 1.0% Duty Cycle
- (4) $T_J = 25^\circ\text{C}$, $f = 1.0\text{ MHz}$, $V_{\text{SIG}} = 50\text{ mV P-P}$