

Sanken Switching Regulator Hybrid IC

Type : STR50041A

1. Scope:

The present specification shall only apply to Sanken Switching Regulator Hybrid IC, type STR50041A.

2. Appearance and Configuration

2-1. Appearance:

The body shall be clean and shall not bear any stain, rust or flaw.


2-2. Appearance, Outline Dimensions, Equivalent Circuit and Basic Application Circuit

Refer to Fig. 1

2-3. Markings

The type number and lot number shall be legitimately be marked in white.

3. Equivalent Circuit

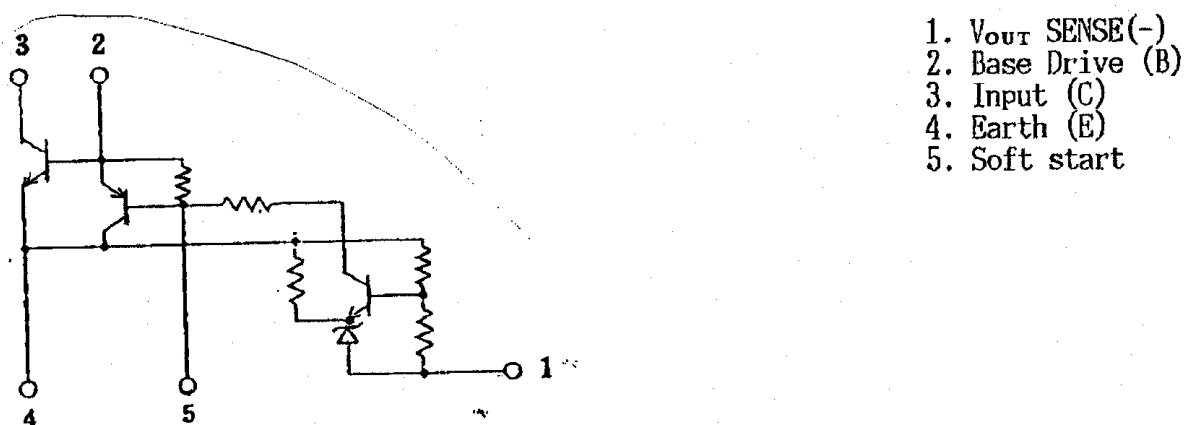

SANKEN ELECTRIC COMPANY, LTD.

4. Ratings

4-1. Absolute Maximum Ratings (Ta=25°C)

Description	Symbol	Unit	Rating
Peak Input Voltage	V_{IN}	V	500
Input Current	I_{IN}	A	10(Pulse 20A)
Power Dissipation *1	P_D	W	27(Tc=100°C)
Operating Temperature	T_{OP}	°C	-20~+125 (Tc)
Storage Temperature	T_{stg}	°C	-30~+125
Junction Temperature	T_J	°C	+150

4-2. Electrical Characteristics (Ta=25°C) (Per Fig. 1-1)

Description	Symbol	Unit	Rating			Conditions
			MIN.	TYP.	MAX.	
Set Output Voltage	V_O	V	41.3	41.8	42.3	$I_{IN}=7mA$, Test Circuit #1
Temperature Coefficient of Output Voltage		mv/°C	± 2			Tc=-20~+100°C, $I_{IN}=7mA$ Test Circuit #1
Power Transistor Characteristics	Collector Saturated Voltage	$V_{CE(SAT)}$	V		0.5	$I_C = 5A$ $I_B = 1A$
	DC Current Gain	h_{FE}		15	40	$V_{CE}=4V$, $I_C=1A$
	Collector Cutoff Current	I_{CEX}	mA		1	$V_{CE}=500V$ $V_{BE}=-1.5V$
	Base-Emitter Saturated Voltage	$V_{BE(SAT)}$	V		1.5	$I_C = 5A$ $I_B = 1A$
	Thermal Resistance	θ_{J-C}	°C/W	1.8		Upper of Junction Stem
	Switching Time	t_s t_r	μs μs		10 0.4	Test Circuit #2 Test Circuit #2
Output Voltage *2		V	115 ± 2			$V_{IN}=100V$, $I_{O1}=1.2A$
Line Regulation 1 *2 (vs. Input Voltage)		V	Initial Value $\pm 2V$			$V_{IN}=85 \sim 132V$ $I_O = 1.2A$
Line Regulation 2 *2 (vs. Output Current)		V	Initial Value $\pm 2V$			$V_{IN}=100V$ $I_{O1}=0.4 \sim 1.2A$

*1: Suggested Case Temperature Top (Tc) = 100 °C.

*2: Please refer to the Application Circuit.

Date: August 22, 1990


Specification No.: SSE-17760E

2/8


SANKEN ELECTRIC COMPANY, LTD.

The Output Voltage can be determined by the number of winding wires D and S of transformer. The reference value is $V_o=115V$.


Application Circuit

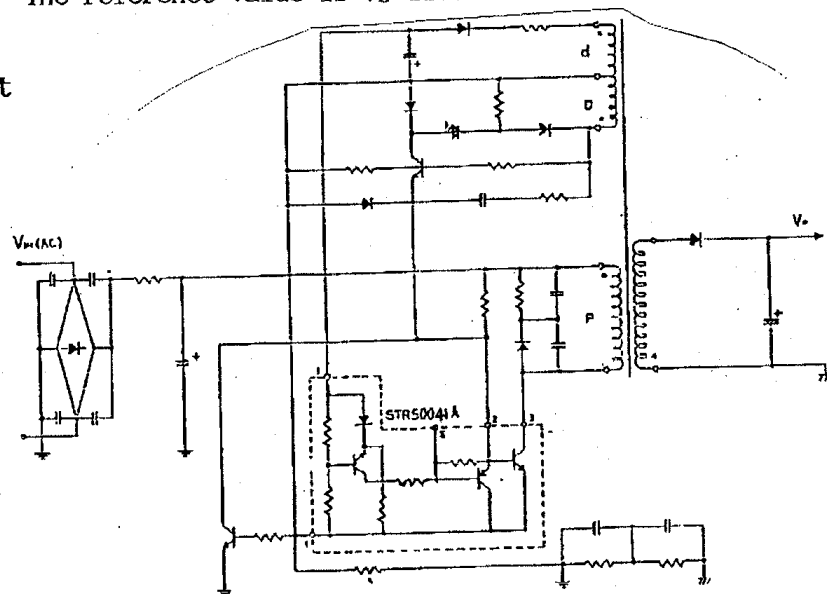

Test Circuit #1

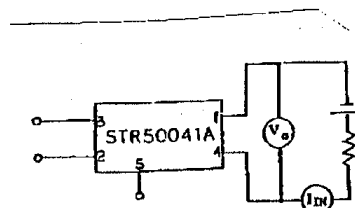

Test Circuit #2


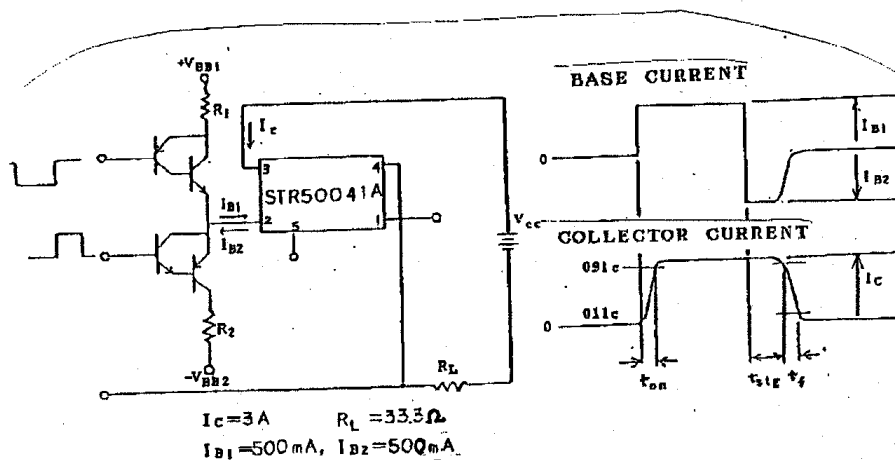


4-4. Suggested Silicone Grease

G-746: SHIN-ETSU CHEMICALS
 YG6280: TOSHIBA SILICONE
 SC102: TORAY SILICONE

5. Marking and Dimension


Fig. 1

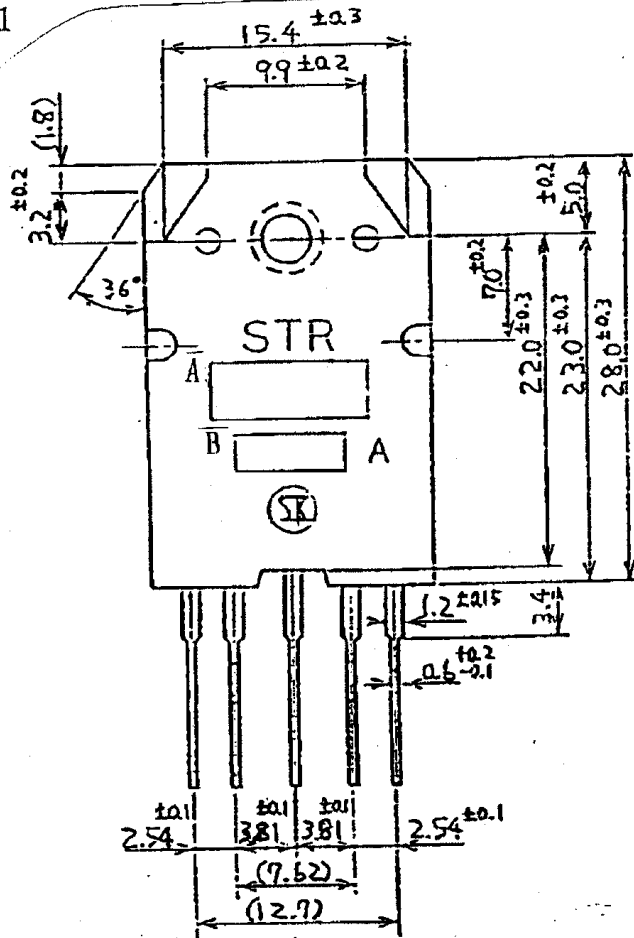

Pin Connection

- ① - V_{OUT} SENSE
- ② - Base Drive (B)
- ③ - Input (C)
- ④ - Earth (E)
- ⑤ - Soft Start

Unit: mm

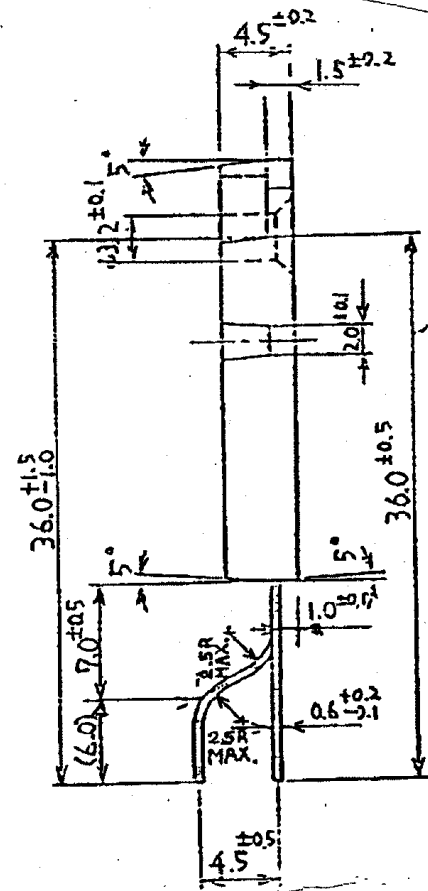

A. Part Number: STR50041A

B. Lot Number:

1st digit - Last digit of Year
2nd digit - Month

Jan. ~ Sept.: 1 ~ 9
Oct.: 0
Nov.: N
Dec.: D

3rd & 4th digit - Day (01 ~ 31)

Date: August 22, 1990


Specification No.:

SSE-17760E

4/8

SANKEN ELECTRIC COMPANY, LTD.

MICA No.23 for STR Series

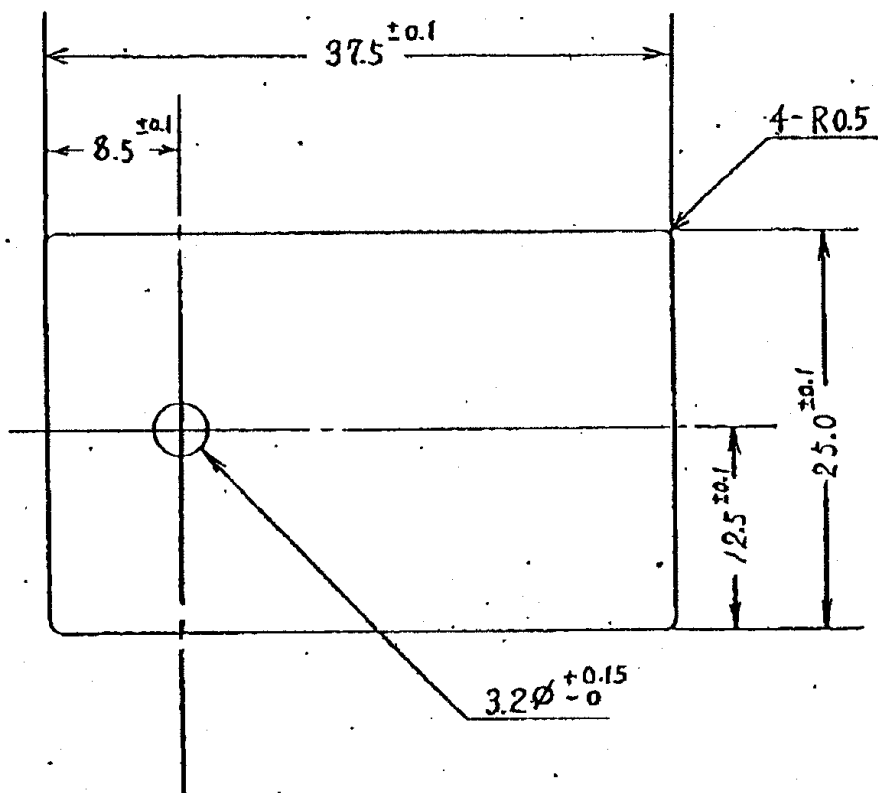

Material : MICA

t : 0.08~0.15

Unit : mm