


DUAL BIPOLAR OPERATIONAL AMPLIFIERS

- LOW DISTORTION RATIO
- LOW NOISE
- VERY LOW SUPPLY CURRENT
- LOW INPUT OFFSET CURRENT
- VERY LOW INPUT OFFSET VOLTAGE
- LARGE COMMON-MODE RANGE
- HIGH GAIN
- HIGH OUTPUT CURRENT
- GAIN-BANDWIDTH PRODUCT : 2.5MHz
- TEMPERATURE DRIFT : $2\mu\text{V}/^\circ\text{C}$
- LONG TERM STABILITY : $8\mu\text{V}/\text{YEAR}$
 (for $T_{\text{amb}} \leq 50^\circ\text{C}$)

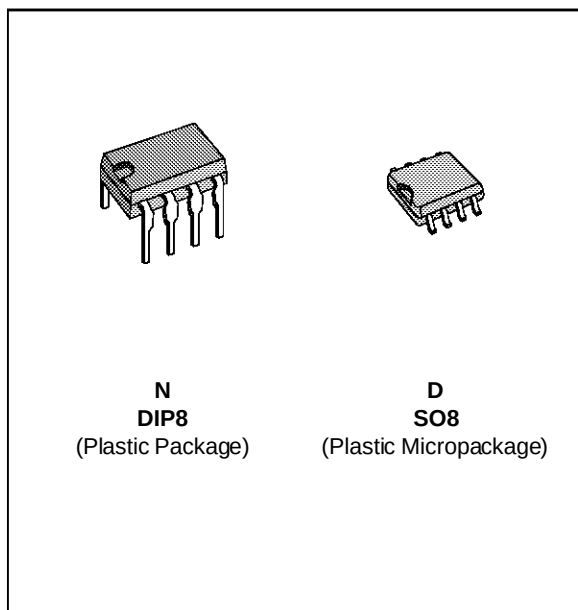

DESCRIPTION


The TEB1033, TEF1033 and TEC1033 are high performance dual-operational amplifiers intended for active filter applications. The internal phase compensation allows stable operation as voltage follower in spite of their high gain-bandwidth products. The circuits present very stable electrical characteristics over the entire supply voltage range.

ORDER CODES


Part Number	Temperature Range	Package	
		N	D
TEB1033	$0^\circ\text{C}, +70^\circ\text{C}$	•	•
TEF1033	$-40^\circ\text{C}, +105^\circ\text{C}$	•	•
TEC1033	$-55^\circ\text{C}, +125^\circ\text{C}$	•	•
Example : TEB1033N			

1033-01.TEL

PIN CONNECTIONS (top view)

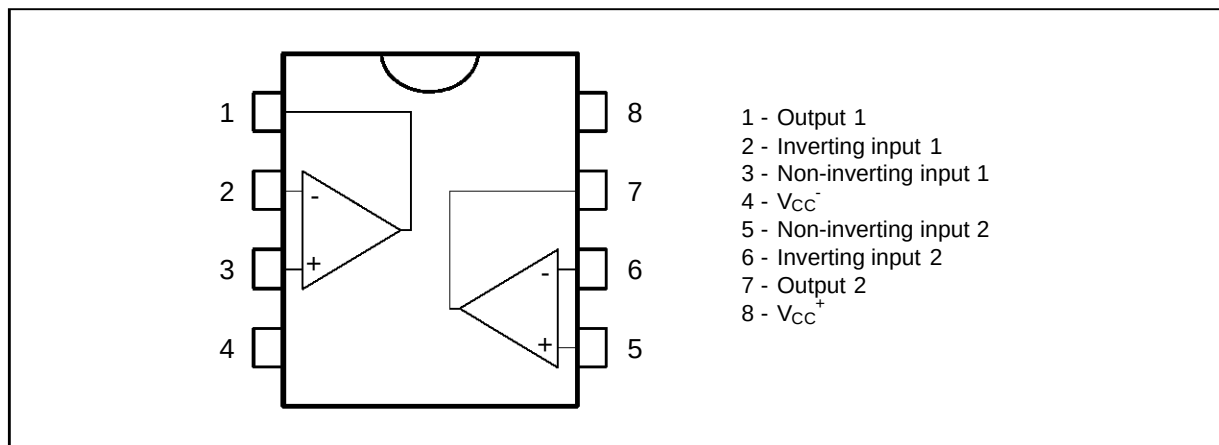

BLOCK DIAGRAM (1/2 TEB1033)

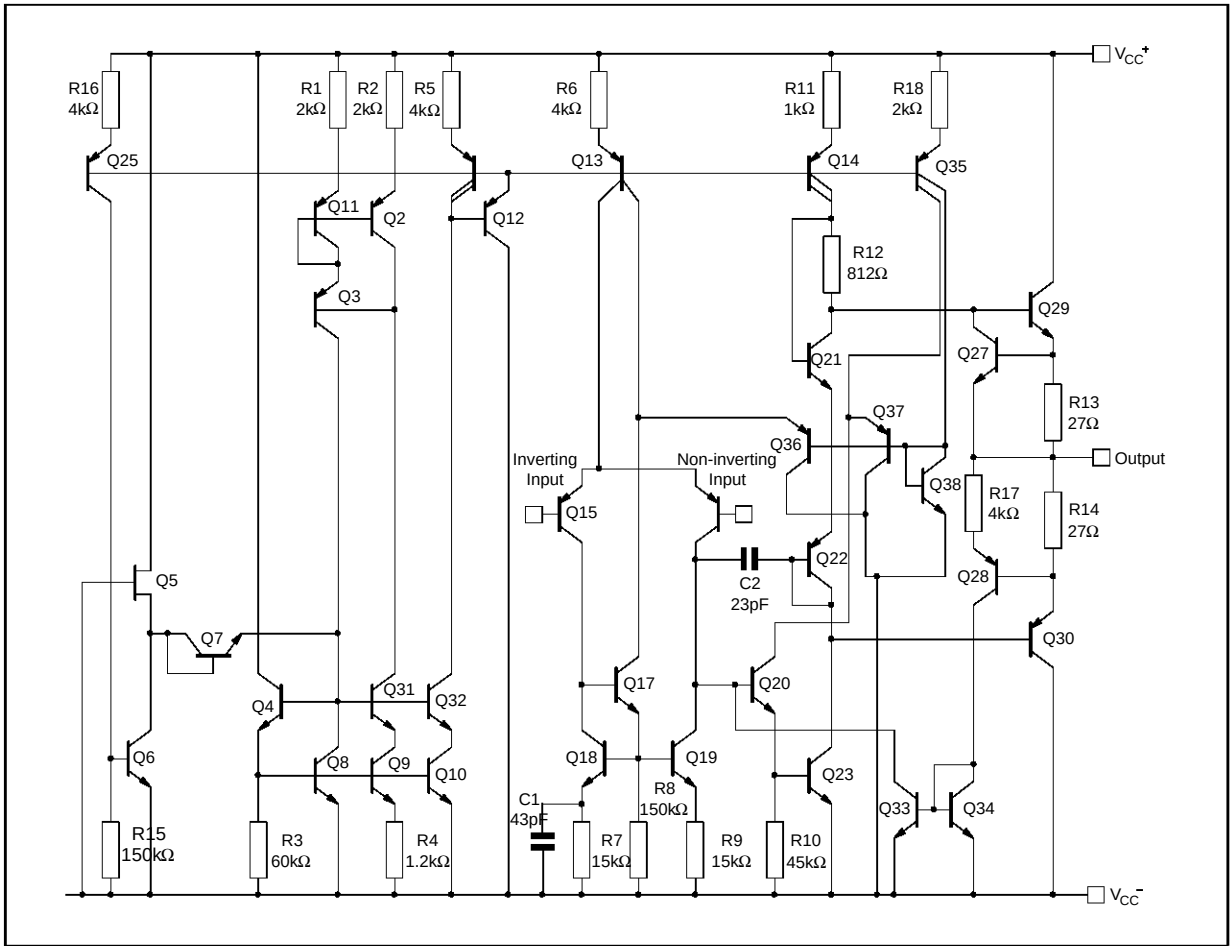

ABSOLUTE MAXIMUM RATINGS


Symbol	Parameter	Value	Unit
V _{CC}	Supply Voltage	± 18	V
V _i	Input Voltage	± V _{CC}	V
V _{id}	Differential Input Voltage	± (V _{CC} -1)	V
P _{tot}	Power Dissipation	D suffix N suffix 400 665	mW
T _{oper}	Operating Free-air Temperature Range	TEB1033 TEF1033 TEC1033 0 to +70 -40 to +105 -55 to +125	°C
T _{stg}	Storage Temperature Range	-65 to +150	°C

ELECTRICAL CHARACTERISTICS $V_{CC} = \pm 15V$, $T_{amb} = +25^{\circ}C$ (unless otherwise specified)


Symbol	Parameter	TEB 1033 TEF 1033 TEC 1033			Unit
		Min.	Typ.	Max.	
V_{io}	Input Offset Voltage ($R_S \leq 10k\Omega$) $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$		0.3	$\frac{1}{3}$	mV
DV_{io}	Input Offset Voltage Drift		2		$\mu V/^{\circ}C$
I_{io}	Input Offset Current $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$		5	$\frac{20}{40}$	nA
I_{ib}	Input Bias Current $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$		50	$\frac{100}{200}$	nA
A_{vd}	Large Signal Voltage Gain ($R_L = 2k\Omega$, $V_O = \pm 10V$) $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$	$\frac{80}{40}$	120		V/mV
SVR	Supply Voltage Rejection Ratio (DV_{CC} from $\pm 15V$ to $\pm 4V$) $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$	$\frac{80}{70}$	100		dB
I_{CC}	Supply Current, all Amp, no Load $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$		1	$\frac{1.5}{2}$	mA
V_{icm}	Input Common Mode Voltage Range $T_{amb} = 25^{\circ}C$	± 12			V
CMR	Common Mode Rejection Ratio ($R_S \leq 10k\Omega$, $V_{ic} = \pm 10V$) $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$	$\frac{80}{70}$	100		dB
I_{os}	Output Short-circuit Current $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$	$\frac{10}{10}$	23	$\frac{40}{40}$	mA
$\pm V_{opp}$	Output Voltage Swing $T_{amb} = 25^{\circ}C$ $T_{min.} \leq T_{amb} \leq T_{max.}$ $V_{CC} = \pm 4V$, $R_L = 2k\Omega$, $T_{amb} = 25^{\circ}C$ $V_{CC} = \pm 6V$, $R_L = 600\Omega$, $T_{amb} = 25^{\circ}C$ $R_L = 2k\Omega$	$\frac{13}{12}$ 2.8 4.6	14 3		V
SR	Slew-rate ($V_I = \pm 10V$, $R_L = 2k\Omega$, $C_L = 100pF$, $T_{amb} = 25^{\circ}C$, unity gain)	0.6	1		V/ μs
GBP	Gain Bandwidth Product ($f = 100kHz$, $T_{amb} = 25^{\circ}C$, $V_{in} = 10mV$, $R_L = 2k\Omega$, $C_L = 100pF$)	1.5	2		MHz
R_i	Input Resistance		1		M Ω
THD	Total Harmonic Distortion ($f = 1kHz$, $A_v = 20dB$, $R_L = 2k\Omega$, $C_L = 100pF$, $T_{amb} = 25^{\circ}C$, $V_O = 2V_{pp}$)		0.008	0.05	%
e_n	Equivalent Input Noise Voltage ($f = 1kHz$) $R_S = 50\Omega$ $R_S = 1k\Omega$ $R_S = 10k\Omega$		$\frac{8}{10}$ 18	15	$\frac{nV}{\sqrt{Hz}}$
V_{OPP}	Large Signal Voltage Swing $R_L = 10k\Omega$, $f = 10kHz$	26	28		V
ϕ_m	Phase Margin		45		Degrees
V_{o1}/V_{o2}	Channel Separation	100	120		dB

1033-03.TBL


SUPPLY CURRENT VERSUS AMBIENT TEMPERATURE

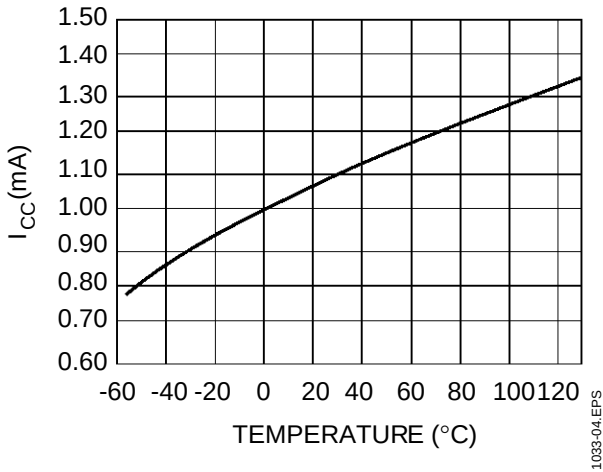


SUPPLY CURRENT VERSUS SUPPLY VOLTAGE

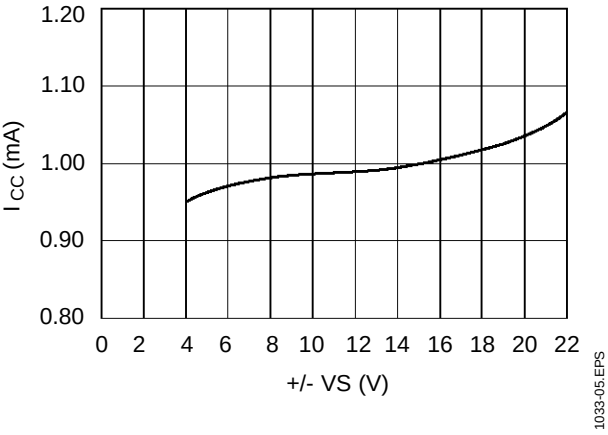


OFFSET VOLTAGE VERSUS AMBIENT TEMPERATURE

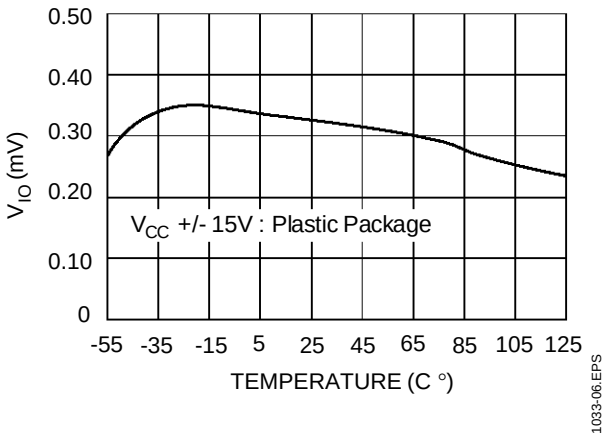


TOTAL INPUT NOISE VERSUS FREQUENCY

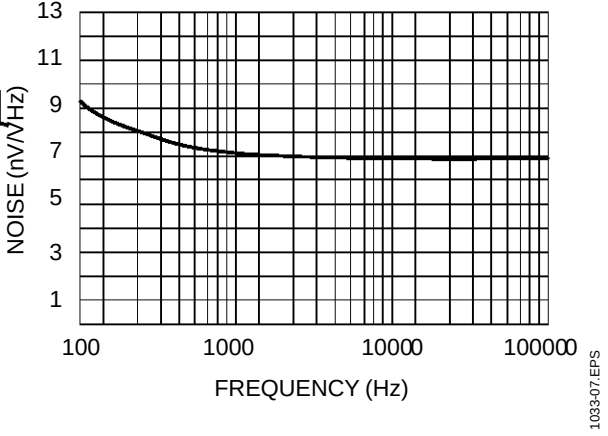


GAIN BANDWIDTH PRODUCT VERSUS FREQUENCY

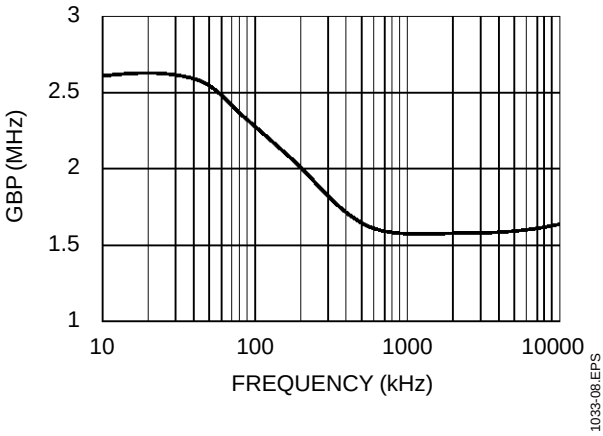

DODE PLOT

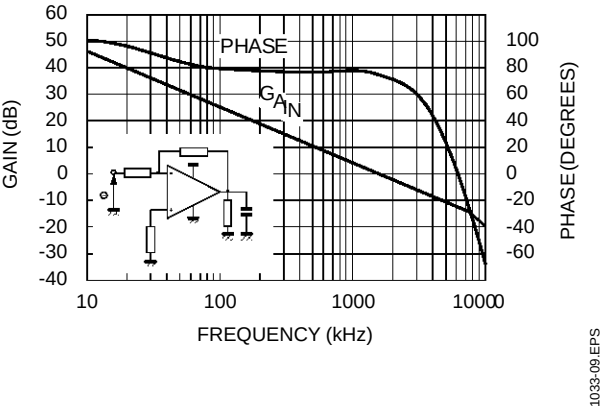

TYPICAL APPLICATION

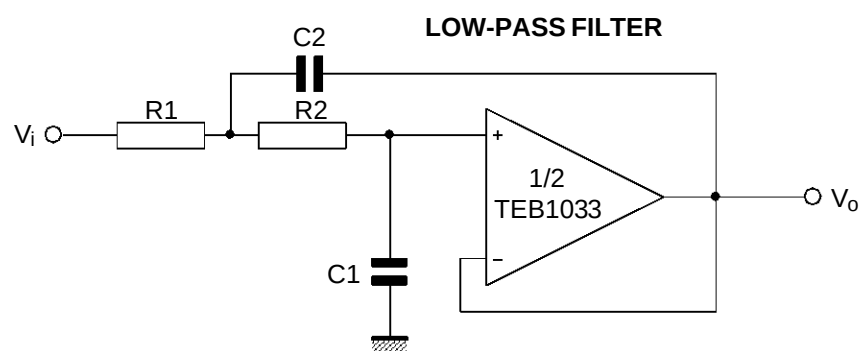


$$\frac{V_o}{V_i} = \frac{1}{1 + 2\xi \frac{S}{\omega_c} + \frac{S^2}{\omega_c^2}}$$


$\omega_c = 2\pi f_c$, with f_c = cut-off frequency
 ξ = damping factor

1033-10.EPS

PACKAGE MECHANICAL DATA
8 PINS - PLASTIC DIP OR CerdIP

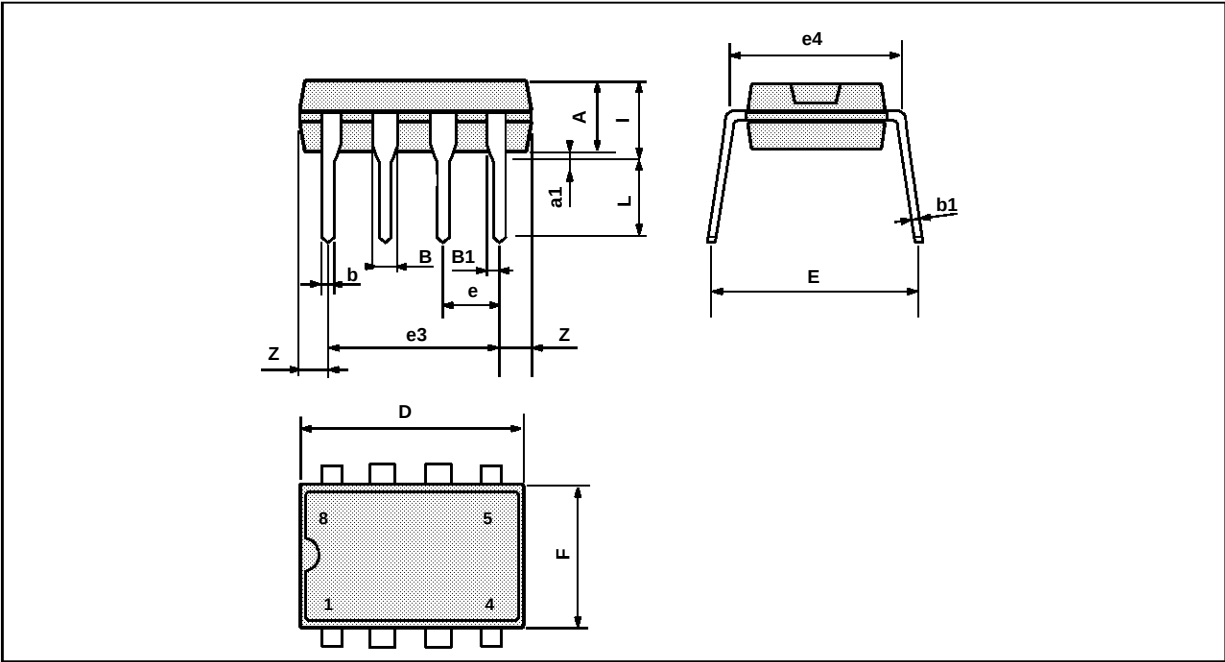

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A		3.32			0.131	
a1	0.51			0.020		
B	1.15		1.65	0.045		0.065
b	0.356		0.55	0.014		0.022
b1	0.204		0.304	0.008		0.012
D			10.92			0.430
E	7.95		9.75	0.313		0.384
e		2.54			0.100	
e3		7.62			0.300	
e4		7.62			0.300	
F			6.6			0.260
i			5.08			0.200
L	3.18		3.81	0.125		0.150
Z			1.52			0.060

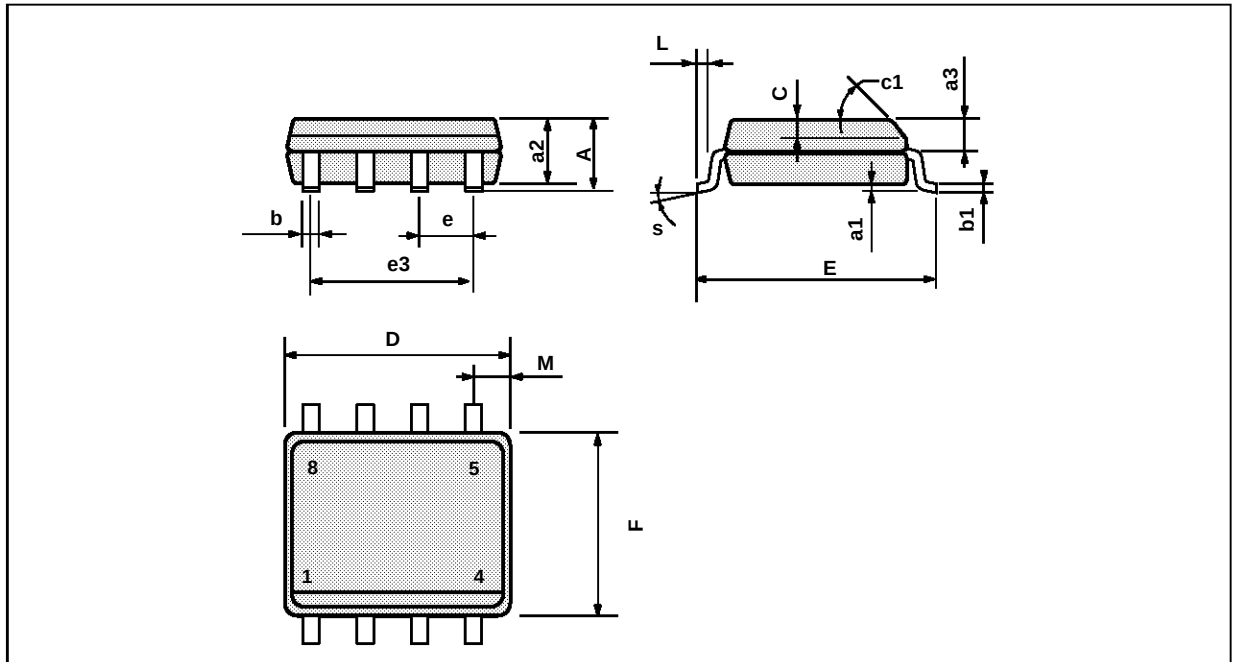PACKAGE MECHANICAL DATA**8 PINS - PLASTIC MICROPACKAGE (SO)**

PM-S08.EPS

Dimensions	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A			1.75			0.069
a1	0.1		0.25	0.004		0.010
a2			1.65			0.065
a3	0.65		0.85	0.026		0.033
b	0.35		0.48	0.014		0.019
b1	0.19		0.25	0.007		0.010
C	0.25		0.5	0.010		0.020
c1	45° (typ.)					
D	4.8		5.0	0.189		0.197
E	5.8		6.2	0.228		0.244
e		1.27			0.050	
e3		3.81			0.150	
F	3.8		4.0	0.150		0.157
L	0.4		1.27	0.016		0.050
M			0.6			0.024
S	8° (max.)					

S08.TEL

Information furnished is believed to be accurate and reliable. However, SGS-THOMSON Microelectronics assumes no responsibility for the consequences of use of such information nor for any infringement of patents or other rights of third parties which may result from its use. No licence is granted by implication or otherwise under any patent or patent rights of SGS-THOMSON Microelectronics. Specifications mentioned in this publication are subject to change without notice. This publication supersedes and replaces all information previously supplied. SGS-THOMSON Microelectronics products are not authorized for use as critical components in life support devices or systems without express written approval of SGS-THOMSON Microelectronics.

© 1994 SGS-THOMSON Microelectronics - All Rights Reserved

SGS-THOMSON Microelectronics GROUP OF COMPANIES

Australia - Brazil - France - Germany - Hong Kong - Italy - Japan - Korea - Malaysia - Malta - Morocco - The Netherlands
Singapore - Spain - Sweden - Switzerland - Taiwan - Thailand - United Kingdom - U.S.A.

ORDER CODE :