

# TLP224G, TLP224G-2

## MODEMS

**PBX**


## TELECOMMUNICATIONS

The TOSHIBA TLP224G series consists of gallium arsenide infrared emitting diode optically coupled to a photo-MOS FET in a 4pin DIP (DIP4), which is suitable for equipment for high tech communications, including modems.

The TLP224G series complies with FCC part 68 rules with current limiting function.



- TLP224G : 4 PIN DIP, 1 Channel Type (1 Form A)
- TLP224G-2 : 8 PIN DIP, 2 Channel Type (2 Form A)
- Peak Off-State Voltage : 350 V (min)
- Trigger LED Current : 3 mA (max)
- On-State Current : 120 mA (max)
- Load Current Limiting : 150 mA~300 mA (t = 5 ms)
- On-State Resistance : 35  $\Omega$  (max)
- Isolation Voltage : 2500 Vrms (min)
- UL Recognized : UL1577, File No. E67349

Unit in mm

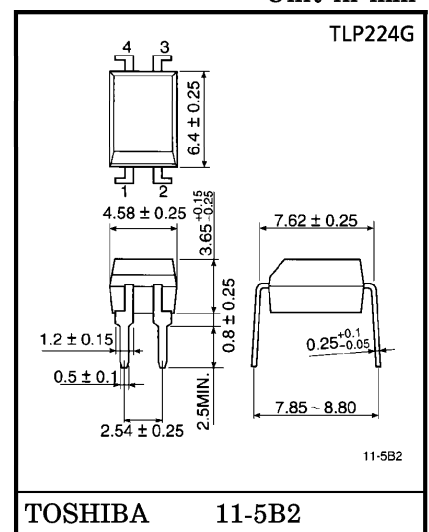


Weight : 0.26 g

1 Form A

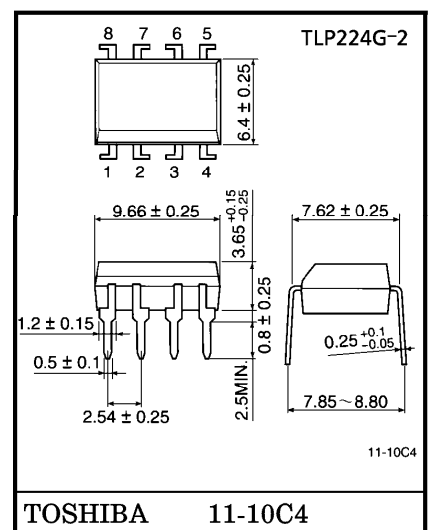

Weight : 0.54 g



2 Form A




980910EBC2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.

**PIN CONFIGURATION (TOP VIEW)**

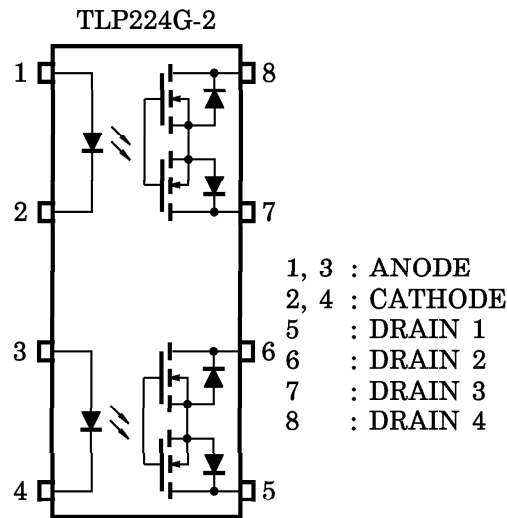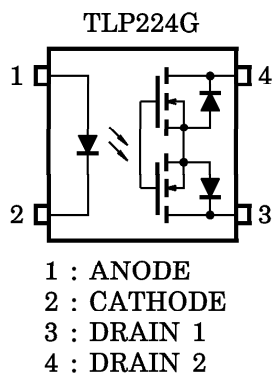

**INTERNAL CIRCUIT**

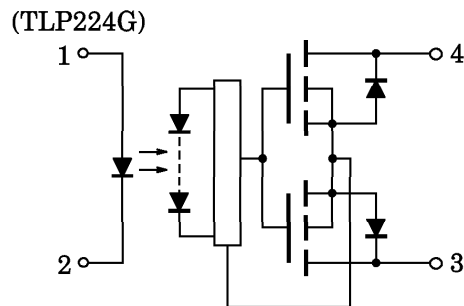

980910EBC2'

- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to the foreign exchange and foreign trade laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

## MAXIMUM RATINGS (Ta = 25°C)

| CHARACTERISTIC                                      |                                                   | SYMBOL                | RATING  | UNIT             |
|-----------------------------------------------------|---------------------------------------------------|-----------------------|---------|------------------|
| LED                                                 | Forward Current                                   | I <sub>F</sub>        | 50      | mA               |
|                                                     | Forward Current Derating (Ta ≥ 25°C)              | ΔI <sub>F</sub> / °C  | −0.5    | mA / °C          |
|                                                     | Peak Forward Current (100 μs pulse, 100 pps)      | I <sub>FP</sub>       | 1       | A                |
|                                                     | Reverse Voltage                                   | V <sub>R</sub>        | 6       | V                |
|                                                     | Junction Temperature                              | T <sub>j</sub>        | 125     | °C               |
| DETECTOR                                            | Off-State Output Terminal Voltage                 | V <sub>OFF</sub>      | 350     | V                |
|                                                     | On-State Current (Note 1)                         | I <sub>ON</sub>       | 120     | mA               |
|                                                     | On-State Current Derating (Ta ≥ 25°C)<br>(Note 1) | ΔI <sub>ON</sub> / °C | −1.2    | mA / °C          |
|                                                     | Junction Temperature                              | T <sub>j</sub>        | 125     | °C               |
| Storage Temperature Range                           |                                                   | T <sub>stg</sub>      | −55~125 | °C               |
| Operating Temperature Range                         |                                                   | T <sub>opr</sub>      | −40~85  | °C               |
| Lead Soldering Temperature (10 s)                   |                                                   | T <sub>sol</sub>      | 260     | °C               |
| Isolation Voltage (AC, 1 min., R.H. ≤ 60%) (Note 2) |                                                   | BV <sub>S</sub>       | 2500    | V <sub>rms</sub> |

(Note 1) : Two channels operating simultaneously.

(Note 2) : Device considered a two-terminal device : LED side pins shorted together, and Detector side pins shorted together.

## RECOMMENDED OPERATING CONDITIONS

| CHARACTERISTIC        | SYMBOL           | MIN | TYP. | MAX | UNIT |
|-----------------------|------------------|-----|------|-----|------|
| Supply Voltage        | V <sub>DD</sub>  | —   | —    | 280 | V    |
| Forward Current       | I <sub>F</sub>   | 5   | 7.5  | 25  | mA   |
| On-State Current      | I <sub>ON</sub>  | —   | —    | 100 | mA   |
| Operating Temperature | T <sub>opr</sub> | −20 | —    | 65  | °C   |

## INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC |                   | SYMBOL    | TEST CONDITION             | MIN | TYP. | MAX | UNIT          |
|----------------|-------------------|-----------|----------------------------|-----|------|-----|---------------|
| LED            | Forward Voltage   | $V_F$     | $I_F = 10 \text{ mA}$      | 1.0 | 1.15 | 1.3 | V             |
|                | Reverse Current   | $I_R$     | $V_R = 6 \text{ V}$        | —   | —    | 10  | $\mu\text{A}$ |
|                | Capacitance       | $C_T$     | $V = 0, f = 1 \text{ MHz}$ | —   | 30   | —   | pF            |
| DETECTOR       | Off-State Current | $I_{OFF}$ | $V_{OFF} = 350 \text{ V}$  | —   | —    | 1   | $\mu\text{A}$ |
|                | Capacitance       | $C_{OFF}$ | $V = 0, f = 1 \text{ MHz}$ | —   | 40   | —   | pF            |

## COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC        | SYMBOL    | TEST CONDITION                                               | MIN | TYP. | MAX | UNIT     |
|-----------------------|-----------|--------------------------------------------------------------|-----|------|-----|----------|
| Trigger LED Current   | $I_{FT}$  | $I_{ON} = 120 \text{ mA}$                                    | —   | 1    | 3   | mA       |
| Load Current Limiting | $I_{LIM}$ | $I_F = 5 \text{ mA}, V_{DD} = 5 \text{ V}, t = 5 \text{ ms}$ | 150 | —    | 300 | mA       |
| On-State Resistance   | $R_{ON}$  | $I_{ON} = 120 \text{ mA}, I_F = 5 \text{ mA}$                | —   | 22   | 35  | $\Omega$ |

## ISOLATION CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC              | SYMBOL | TEST CONDITION                               | MIN                | TYP.      | MAX | UNIT      |
|-----------------------------|--------|----------------------------------------------|--------------------|-----------|-----|-----------|
| Capacitance Input to Output | $C_S$  | $V_S = 0, f = 1 \text{ MHz}$                 | —                  | 0.8       | —   | pF        |
| Isolation Resistance        | $R_S$  | $V_S = 500 \text{ V}, \text{R.H.} \leq 60\%$ | $5 \times 10^{10}$ | $10^{14}$ | —   | $\Omega$  |
| Isolation Voltage           | $BV_S$ | AC, 1 minute                                 | 2500               | —         | —   | $V_{rms}$ |
|                             |        | AC, 1 second (in oil)                        | —                  | 5000      | —   |           |
|                             |        | DC, 1 minute (in oil)                        | —                  | 5000      | —   | $V_{dc}$  |

## SWITCHING CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC | SYMBOL    | TEST CONDITION                              | MIN | TYP. | MAX | UNIT |
|----------------|-----------|---------------------------------------------|-----|------|-----|------|
| Turn-on Time   | $t_{ON}$  | $R_L = 200 \Omega$ (Note 1)                 | —   | —    | 1   | ms   |
| Turn-off Time  | $t_{OFF}$ | $V_{CC} = 20 \text{ V}, I_F = 5 \text{ mA}$ | —   | —    | 1   |      |

(Note 1) : SWITCHING TIME TEST CIRCUIT

