

TOSHIBA PHOTOCOUPLER GaAs IRED &amp; PHOTO-TRIAC

# TLP3506

TRIAC DRIVER

PROGRAMMABLE CONTROLLERS


AC-OUTPUT MODULE

SOLID STATE RELAY

The TOSHIBA TLP3506 consists of a photo-triac optically coupled to a gallium arsenide infrared emitting diode in a 8 lead plastic DIP.


- Peak Off-State Voltage : 600V (MIN.)
- Trigger LED Current : 10mA (MAX.)
- On-State Current :  $0.5A_{rms}$  (MAX.)
- Isolation Voltage :  $2500V_{rms}$  (MIN.)
- UL Recognized : UL1577, File No. E67349

Unit in mm

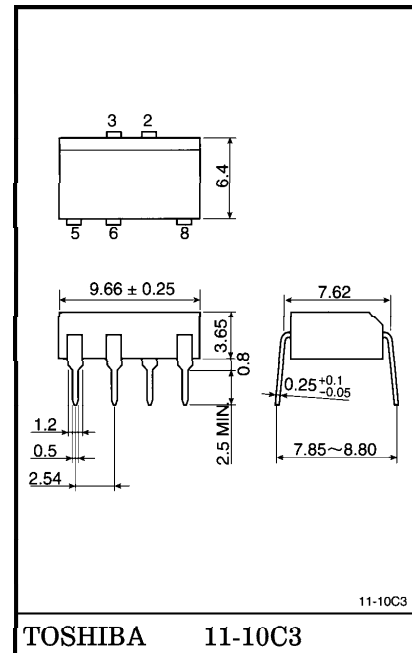

Weight : 0.52g

PIN CONFIGURATION (TOP VIEW)



- 2 : ANODE
- 3 : CATHODE
- 5 : TRIAC GATE
- 6 : TRIAC T1
- 8 : TRIAC T2

961001EBC2

- TOSHIBA is continually working to improve the quality and the reliability of its products. Nevertheless, semiconductor devices in general can malfunction or fail due to their inherent electrical sensitivity and vulnerability to physical stress. It is the responsibility of the buyer, when utilizing TOSHIBA products, to observe standards of safety, and to avoid situations in which a malfunction or failure of a TOSHIBA product could cause loss of human life, bodily injury or damage to property. In developing your designs, please ensure that TOSHIBA products are used within specified operating ranges as set forth in the most recent products specifications. Also, please keep in mind the precautions and conditions set forth in the TOSHIBA Semiconductor Reliability Handbook.
- Gallium arsenide (GaAs) is a substance used in the products described in this document. GaAs dust and fumes are toxic. Do not break, cut or pulverize the product, or use chemicals to dissolve them. When disposing of the products, follow the appropriate regulations. Do not dispose of the products with other industrial waste or with domestic garbage.
- The products described in this document are subject to foreign exchange and foreign trade control laws.
- The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.
- The information contained herein is subject to change without notice.

## MAXIMUM RATINGS (Ta = 25°C)

| CHARACTERISTIC |                                                         | SYMBOL               | RATING  | UNIT             |
|----------------|---------------------------------------------------------|----------------------|---------|------------------|
| LED            | Forward Current                                         | I <sub>F</sub>       | 50      | mA               |
|                | Forward Current Derating (Ta ≥ 53°C)                    | ΔI <sub>F</sub> / °C | −0.7    | mA / °C          |
|                | Peak Forward Current (100μs pulse, 100pps)              | I <sub>FP</sub>      | 1       | A                |
|                | Reverse Voltage                                         | V <sub>R</sub>       | 5       | V                |
|                | Junction Temperature                                    | T <sub>j</sub>       | 125     | °C               |
| DETECTOR       | Off-State Output Terminal Voltage                       | V <sub>DRM</sub>     | 600     | V                |
|                | On-State RMS Current                                    | I <sub>T</sub> (RMS) | 0.5     | A                |
|                |                                                         |                      | 0.35    |                  |
|                | On-State Current Derating (Ta ≥ 40°C)                   | ΔI <sub>T</sub> / °C | −7.2    | mA / °C          |
|                | Peak Current from Snubber Circuit (100μs pulse, 120pps) | I <sub>SP</sub>      | 2       | A                |
|                | Peak Nonrepetitive Surge Current (50Hz, Peak)           | I <sub>TSM</sub>     | 5       | A                |
|                | Junction Temperature                                    | T <sub>j</sub>       | 110     | °C               |
|                | Storage Temperature Range                               | T <sub>stg</sub>     | −40~125 | °C               |
|                | Operating Temperature Range                             | T <sub>opr</sub>     | −20~80  | °C               |
|                | Lead Soldering Temperature (10s)                        | T <sub>sol</sub>     | 260     | °C               |
|                | Isolation Voltage (AC, 1 min., R.H. ≤ 60%) (Note)       | BV <sub>S</sub>      | 2500    | V <sub>rms</sub> |

(Note) Device considered a two terminal : LED side pins shorted together and DETECTOR side pins shorted together.

## RECOMMENDED OPERATING CONDITIONS

| CHARACTERISTIC                    | SYMBOL           | MIN. | TYP. | MAX. | UNIT            |
|-----------------------------------|------------------|------|------|------|-----------------|
| Supply Voltage                    | V <sub>AC</sub>  | —    | —    | 240  | V <sub>ac</sub> |
| Forward Current                   | I <sub>F</sub>   | 15   | 20   | 25   | mA              |
| Peak Current from Snubber Circuit | I <sub>SP</sub>  | —    | —    | 1    | A               |
| Operating Temperature             | T <sub>opr</sub> | −20  | —    | 80   | °C              |

INDIVIDUAL ELECTRICAL CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC |                                              | SYMBOL           | TEST CONDITION                                                                     | MIN. | TYP. | MAX. | UNIT                   |
|----------------|----------------------------------------------|------------------|------------------------------------------------------------------------------------|------|------|------|------------------------|
| LED            | Forward Voltage                              | $V_F$            | $I_F = 10\text{mA}$                                                                | 1.0  | 1.15 | 1.3  | V                      |
|                | Reverse Current                              | $I_R$            | $V_R = 5\text{V}$                                                                  | —    | —    | 10   | $\mu\text{A}$          |
|                | Capacitance                                  | $C_T$            | $V = 0, f = 1\text{MHz}$                                                           | —    | 30   | —    | pF                     |
| DETECTOR       | Peak Off-State Current                       | $I_{\text{DRM}}$ | $V_{\text{DRM}} = 600\text{V}, T_a = 110^\circ\text{C}$                            | —    | —    | 100  | $\mu\text{A}$          |
|                | Peak On-State Voltage                        | $V_{\text{TM}}$  | $I_{\text{TM}} = 0.75\text{A}$                                                     | —    | —    | 3.0  | V                      |
|                | Holding Current                              | $I_H$            | —                                                                                  | —    | —    | 25   | mA                     |
|                | Critical Rate of Rise of Off-State Voltage   | $dv/dt$          | $V_{\text{in}} = 240\text{V}_{\text{rms}}$ (Fig.1)                                 | —    | 500  | —    | $\text{V}/\mu\text{s}$ |
|                | Critical Rate of Rise of Commutating Voltage | $dv/dt(c)$       | $V_{\text{in}} = 240\text{V}_{\text{rms}}, I_T = 0.5\text{A}_{\text{rms}}$ (Fig.1) | —    | 5    | —    | $\text{V}/\mu\text{s}$ |

COUPLED ELECTRICAL CHARACTERISTICS (Ta = 25°C)

| CHARACTERISTIC                | SYMBOL          | TEST CONDITION             | MIN.               | TYP.      | MAX. | UNIT             |
|-------------------------------|-----------------|----------------------------|--------------------|-----------|------|------------------|
| Trigger LED Current           | $I_{\text{FT}}$ | $V_T = 6\text{V}$          | —                  | —         | 10   | mA               |
| Capacitance (Input to Output) | $C_S$           | $V_S = 0, f = 1\text{MHz}$ | —                  | 1.5       | —    | pF               |
| Isolation Resistance          | $R_S$           | $V_S = 500\text{V}$        | $5 \times 10^{10}$ | $10^{14}$ | —    | $\Omega$         |
| Isolation Voltage             | $BV_S$          | AC, 1 minute               | 2500               | —         | —    | $V_{\text{rms}}$ |
|                               |                 | AC, 1 second, in oil       | —                  | 5000      | —    |                  |
|                               |                 | DC, 1 minute, in oil       | —                  | 5000      | —    | $V_{\text{dc}}$  |

Fig.1 : dv / dt TEST CIRCUIT

