

NEC

NEC Electronics Inc.

μ PD41256 262,144 x 1-Bit Dynamic NMOS RAM

Description

The μ PD41256 is a 262,144-word by 1-bit dynamic RAM designed to operate from a single +5-volt power supply and fabricated with a double polylayer, N-channel, silicon-gate process for high density, high performance, and high reliability. A single-transistor storage cell and advanced dynamic circuitry, including 1024 sense amplifiers, ensure that power dissipation is minimized, while an on-chip circuit generates the negative-voltage substrate bias—automatically and transparently.

The three-state output is controlled by $\overline{\text{CAS}}$ independent of $\overline{\text{RAS}}$. After a valid read or read-modify-write cycle, data is held on the output by holding $\overline{\text{CAS}}$ low. The data output is returned to high impedance by returning $\overline{\text{CAS}}$ high. A hidden refresh feature allows $\overline{\text{CAS}}$ to be held low to maintain output data while $\overline{\text{RAS}}$ is used to execute refresh cycles.


Refreshing may be accomplished by means of $\overline{\text{RAS}}$ -only refresh cycles, hidden refresh cycles, $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh cycles, or by normal read or write cycles on the 256 address combinations of A_0 through A_7 during a 4-ms refresh period.

Features


- 262,144-word x 1-bit organization
- High-density plastic DIP and PLCC packaging
- Multiplexed address inputs
- Single +5-volt power supply
- On-chip substrate bias generator
- Low power dissipation of 28 mW max (standby)
- Nonlatched, three-state outputs
- Fully TTL-compatible inputs and outputs
- Low input capacitance
- 256 refresh cycles every 4 ms
- Optional page cycle
- $\overline{\text{RAS}}$ -only, hidden, and $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refreshing

Pin Configurations

16-Pin Plastic DIP

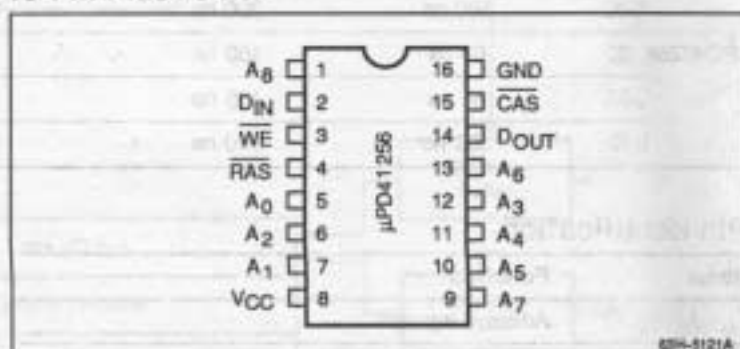

18-Pin Plastic Leaded Chip Carrier (PLCC)

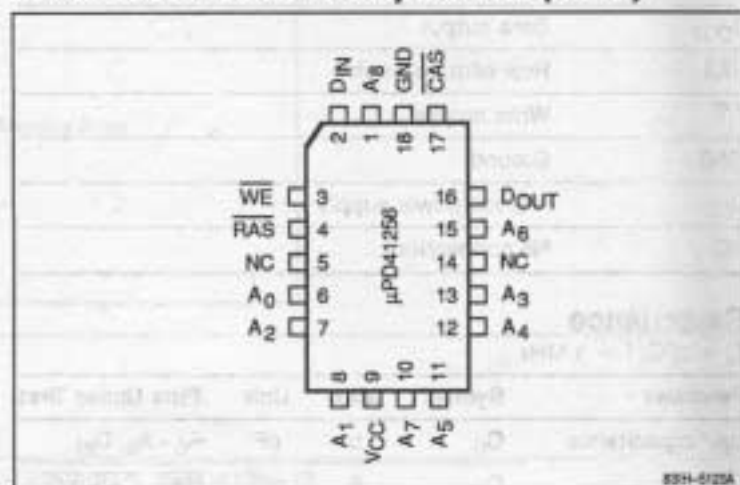

μ PD41256

Ordering Information

Part Number	Row Access Time (max)	R/W Cycle (min)	Page Cycle (min)	Power Supply Tolerance	Package
μ PD41256C-80	80 ns	160 ns	70 ns	$\pm 5\%$	16-pin plastic DIP
C-85	85 ns	165 ns	70 ns		
C-100	100 ns	200 ns	100 ns	$\pm 10\%$	
μ PD41256L-80	80 ns	160 ns	70 ns	$\pm 5\%$	18-pin plastic leaded chip carrier
L-85	85 ns	165 ns	70 ns		
L-100	100 ns	200 ns	100 ns	$\pm 10\%$	

Pin Identification

Name	Function
$A_0 - A_9$	Address inputs
CAS	Column address strobe
D_{IN}	Data input
D_{OUT}	Data output
RAS	Row address strobe
WE	Write enable
GND	Ground
V_{CC}	+5-volt power supply
NC	No connection

Capacitance

$T_A = 25^\circ\text{C}$; $f = 1\text{ MHz}$

Parameter	Symbol	Max	Unit	Pins Under Test
Input capacitance	C_{i1}	5	pF	$A_0 - A_9$, D_{IN}
	C_{i2}	8	pF	RAS, CAS, WE
Output capacitance	C_{OUT}	7	pF	D_{OUT}

Absolute Maximum Ratings

Voltage on any pin relative to GND, V_T	-1.0 to +7.0 V
Operating temperature, T_A (ambient)	0 to +70°C
Storage temperature, T_{STG}	-55 to +125°C
Short-circuit output current, I_{OS}	50 mA
Power dissipation, P_D	1.0 W

Exposure to Absolute Maximum Ratings for extended periods may affect device reliability; exceeding the ratings could cause permanent damage. The device should be operated within the limits specified under DC and AC Characteristics.

Recommended Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit
Supply voltage	V_{CC}	4.5	5.0	5.5	V
Input voltage, high	V_{IH}	2.4		$V_{CC} + 1.0$	V
Input voltage, low	V_{IL}	-1.0		0.8	V
Ambient temperature	T_A	0		70	°C

Notes:


(1) $V_{CC} = +5\text{ V} \pm 5\%$ for the -80 and -85 versions.

DC Characteristics

$T_A = 0\text{ to }+70^\circ\text{C}$; $V_{CC} = +5.0\text{ V} \pm 10\%$

Parameter	Symbol	Min	Max	Unit	Test Conditions
Standby supply current	I_{CC2}		5.0	mA	RAS = V_{IH} ; D_{OUT} = high impedance
Input leakage current	$I_{i(L)}$	-10	10	μA	$V_{IN} = 0\text{ V to }V_{CC}$; all other pins not under test = 0 V
Output leakage current	$I_{O(L)}$	-10	10	μA	D_{OUT} disabled; $V_{OUT} = 0\text{ V to }V_{CC}$
Output voltage, low	V_{OL}		0.4	V	$I_{OL} = 4.2\text{ mA}$
Output voltage, high	V_{OH}	2.4		V	$I_{OUT} = -5\text{ mA}$

Block Diagram

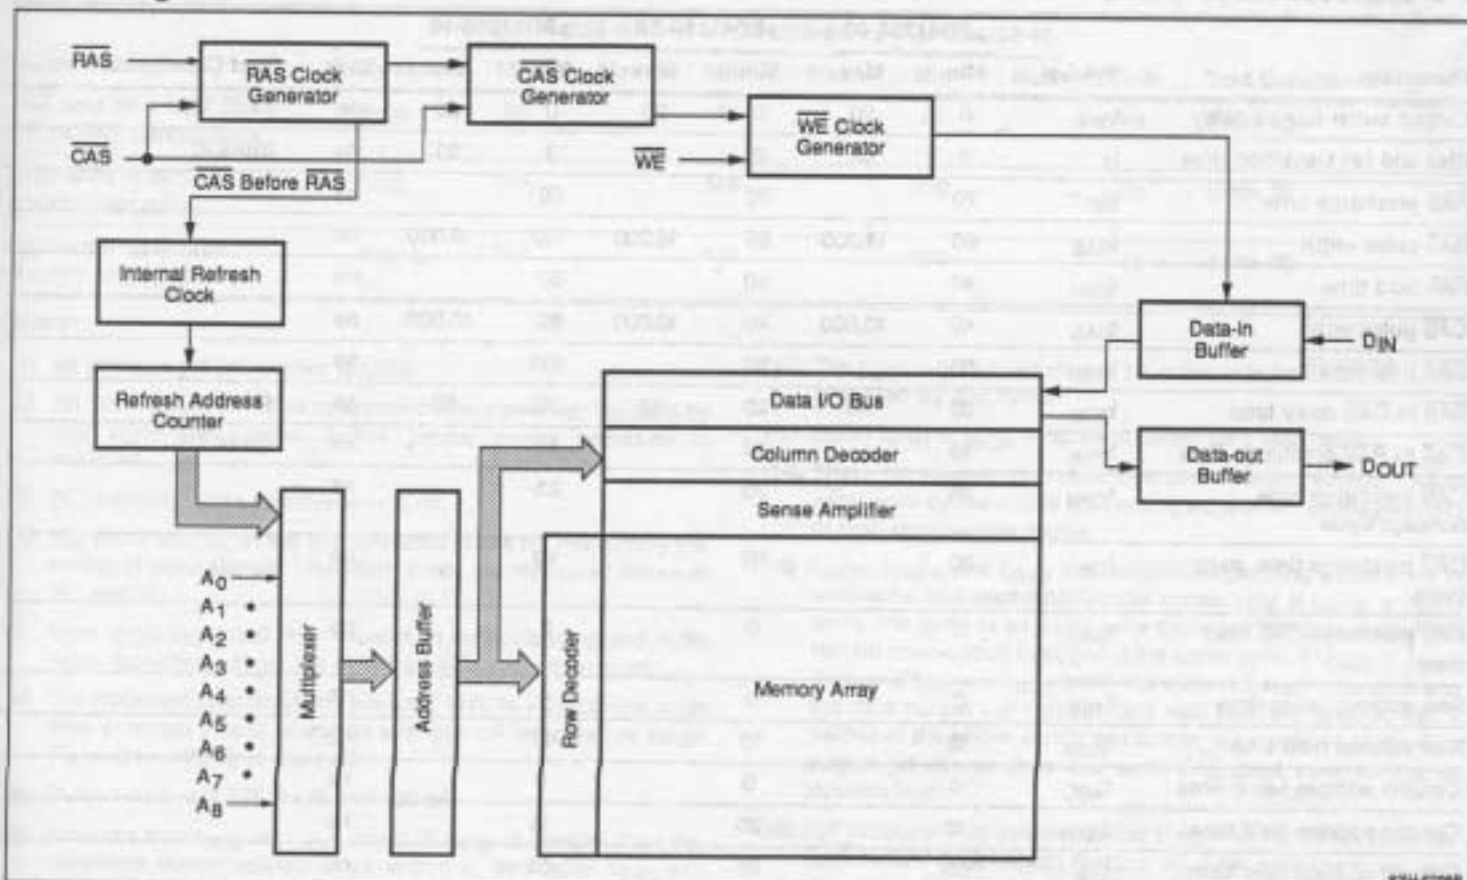

83H-6298B

AC Characteristics

$T_A = 0 \text{ to } +70^\circ\text{C}$

Parameter	Symbol	μPD41256-80		μPD41256-85		μPD41256-10		Unit	Test Conditions
		Min	Max	Min	Max	Min	Max		
Supply voltage	V_{CC}	4.75	5.25	4.75	5.25	4.5	5.5		
Operating supply current, average	I_{CC1}		90		90		80	mA	RAS, CAS cycling; $t_{RC} = t_{RC}(\text{min})$; $I_O = 0 \text{ mA}$ (Note 5)
Operating supply current, RAS-only refresh cycle, average	I_{CC3}		80		80		65	mA	RAS cycling; CAS $\geq V_{IH}$; $t_{RC} = t_{RC}(\text{min})$; $I_O = 0 \text{ mA}$ (Note 5)
Operating supply current, page cycle, average	I_{CC4}		70		70		60	mA	RAS $\leq V_{IL}$; CAS cycling; $t_{PC} = t_{PC}(\text{min})$; $I_O = 0 \text{ mA}$ (Note 5)
Operating current, CAS before RAS refresh cycle, average	I_{CC5}		80		80		65	mA	CAS $\leq V_{IL}$; RAS cycling; $t_{RC} = t_{RC}(\text{min})$; I/O = 0 mA (Note 5)
Random read or write cycle time	t_{RC}	180		165		200		ns	(Note 6)
Read-write cycle time	t_{RWC}	185		195		240		ns	(Note 6)
Page cycle time	t_{PC}	70		70		100		ns	(Note 6)
Access time from RAS	t_{RAC}		80		85		100	ns	(Notes 7, 8)
Access time from CAS	t_{CAC}		40		40		50	ns	(Notes 7, 9)

AC Characteristics (cont)

Parameter	Symbol	μPD41256-80		μPD41256-85		μPD41256-10		Unit	Test Conditions
		Min	Max	Min	Max	Min	Max		
Output buffer turnoff delay	t_{OFF}	0	20	0	20	0	25	ns	(Note 10)
Rise and fall transition time	t_T	3	50	3	50	3	50	ns	(Note 4)
RAS precharge time	t_{RP}	70		70		90		ns	
RAS pulse width	t_{RAS}	80	16,000	85	16,000	100	10,000	ns	
RAS hold time	t_{RSH}	40		40		50		ns	
CAS pulse width	t_{CAS}	40	10,000	40	10,000	50	10,000	ns	
CAS hold time	t_{CSH}	80		85		100		ns	
RAS to CAS delay time	t_{RCD}	20	40	20	45	20	50	ns	(Note 11)
CAS to RAS precharge time	t_{CRP}	10		10		10		ns	(Note 12)
CAS precharge time, nonpage cycle	t_{CPN}	25		25		25		ns	
CAS precharge time, page cycle	t_{CP}	20		20		40		ns	
RAS precharge CAS hold time	t_{RPC}	0		0		0		ns	
Row address setup time	t_{ASR}	0		0		0		ns	
Row address hold time	t_{RAH}	10		10		10		ns	
Column address setup time	t_{ASC}	0		0		0		ns	
Column address hold time	t_{CAH}	15		20		15		ns	
Column address hold time referenced to RAS	t_{AR}	55		65		65		ns	
Read command setup time	t_{RCS}	0		0		0		ns	
Read command hold time referenced to RAS	t_{RRH}	10		10		10		ns	(Note 13)
Read command hold time referenced to CAS	t_{RCH}	0		0		0		ns	(Note 13)
Write command hold time	t_{WCH}	20		20		25		ns	
Write command hold time referenced to RAS	t_{WCR}	60		65		75		ns	
Write command pulse width	t_{WP}	20		15		15		ns	(Note 17)
Write command to RAS lead time	t_{RWL}	20		30		35		ns	
Write command to CAS lead time	t_{CWL}	20		50		35		ns	
Data-in setup time	t_{DS}	0		0		0		ns	(Note 14)
Data-in hold time	t_{DH}	20		20		25		ns	(Note 14)
Data-in hold time referenced to RAS	t_{DHR}	60		65		75		ns	
Refresh period	t_{REF}		4		4		4	ms	Addresses $A_0 - A_7$
WE command setup time	t_{WCS}	0		0		0		ns	(Note 15)
CAS to WE delay	t_{CWD}	40		40		50		ns	(Note 15)
RAS to WE delay	t_{RWD}	80		85		100		ns	(Note 15)
CAS setup time for CAS before RAS refresh cycle	t_{CSR}	10		10		10		ns	(Note 16)

AC Characteristics (cont)

Parameter	Symbol	μ PD41256-80		μ PD41256-85		μ PD41256-10		Unit	Test Conditions
		Min	Max	Min	Max	Min	Max		
CAS hold time for CAS before RAS refresh cycle	t_{CHR}	20		15		20		ns	(Note 16)
Read-write cycle time (counter test cycle)	t_{TRC}	N/A		N/A		220		ns	(Note 18)
Read-write cycle time (counter test cycle)	t_{TRWC}	N/A		N/A		260		ns	(Note 18)

Notes:

- (1) All voltages are referenced to GND.
- (2) An initial pause of 100 μ s is required after power-up, followed by any eight $\overline{\text{RAS}}$ cycles, before proper device operation is achieved.
- (3) AC measurements assume $t_T = 5$ ns.
- (4) V_{IH} (min) and V_{IL} (max) are reference levels for measuring the timing of input signals. Transition times are measured between V_{IH} and V_{IL} .
- (5) t_{CC1} , t_{CC3} , t_{CC4} , and t_{CC5} depend on output loading and cycle rates. Specified values are obtained with the output open.
- (6) The minimum specifications are used only to indicate the cycle time at which proper operation over the full temperature range ($T_A = 0$ to $+70^\circ\text{C}$) is assured.
- (7) Output load = 2 TTL loads and 100 pF.
- (8) Assumes that $t_{RCD} \leq t_{RCD}(\text{max})$. If t_{RCD} is greater than the maximum recommended value shown in this table, t_{RAC} will increase by the amount that t_{RCD} exceeds the value shown.
- (9) Assumes that $t_{RCD} \geq t_{RCD}(\text{max})$.
- (10) $t_{OFF}(\text{max})$ defines the time at which the output achieves the open-circuit condition and is not referenced to V_{OH} or V_{OL} .
- (11) Operation within the $t_{RCD}(\text{max})$ limit assures that $t_{RAC}(\text{max})$ can be met. $t_{RCD}(\text{max})$ is specified as a reference point only. If t_{RCD} is greater than the specified $t_{RCD}(\text{max})$ limit, then access time is controlled exclusively by t_{CAC} .
- (12) The t_{CRP} requirement should be applicable for $\overline{\text{RAS}}/\overline{\text{CAS}}$ cycles preceded by any cycle.
- (13) Either t_{RRH} or t_{RCH} must be satisfied for a read cycle.
- (14) These parameters are referenced to the leading edge of $\overline{\text{CAS}}$ in early write cycles and to the leading edge of $\overline{\text{WE}}$ in delayed write or read-modify-write cycles.
- (15) t_{WCS} , t_{CWD} , and t_{RWD} are restrictive operating parameters in read-write and read-modify-write cycles only. If $t_{WCS} \geq t_{WCS}(\text{min})$, the cycle is an early write cycle and the data output will remain open-circuit throughout the entire cycle. If $t_{CWD} \geq t_{CWD}(\text{min})$ and $t_{RWD} \geq t_{RWD}(\text{min})$, the cycle is a read-write cycle and the data output will contain data read from the selected cell. If neither of the above conditions is met, the condition of the data output (at access time and until $\overline{\text{CAS}}$ goes back to V_{IH}) is indeterminate.
- (16) DIP products with process codes E, K, P and X do not have the $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh feature. All other package types and process codes do have $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refreshing.
On DIP products with process codes E, K, P and X, the external address inputs are required in hidden refresh cycles and the address timing must satisfy t_{ASR} and t_{RAH} , which are specified with respect to the falling edge of $\overline{\text{RAS}}$.
- (17) t_{WP} is applicable for a delayed write cycle. If the cycle is early write, it should be satisfied with the specified value of t_{WCH} .
- (18) t_{TRC} and t_{TRWL} are applicable for a $\overline{\text{CAS}}$ before $\overline{\text{RAS}}$ refresh counter test cycle.