

Silicon Switching Diode

1N457A


DO-35 Glass Package

Applications

Used in general purpose applications, where a controlled forward characteristic is important.

Features

- Six sigma quality
- BKC's Sigma Bond™ plating for problem free solderability
- LL-35 MELF SMD available
- Hermetic Glass Package
- Extremely low FIT Level

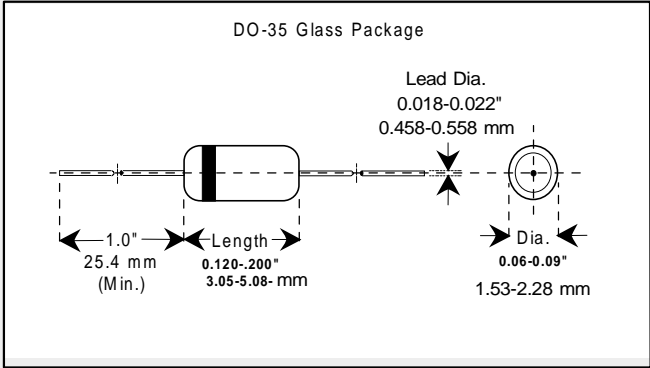

Maximum Ratings	Symbol	Value	Unit	
Peak Inverse Voltage	PIV	70 (Min).	Volts	
Average Rectified Current	I_{avg}	200	mAmps	
Continuous Forward Current	I_{Fdc}	300	mAmps	
Peak Surge Current ($t_{peak} = 1 \text{ sec.}$)	I_{peak}	1.0	Amp	
Max. Power Dissipation $T_L = 50 \text{ }^\circ\text{C}$, $L = 3/8"$ from body	P_{tot}	500	mWatts	
Operating Temperature Range	T_{Op}	-80 to +200	$^\circ\text{C}$	
Storage Temperature Range	T_{St}	-80 to +200	$^\circ\text{C}$	
Electrical Characteristics @ 25°C*	Symbol	Minimum	Maximum	Unit
Forward Voltage Drop @ $I_F = 100 \text{ mA}$	V_F	***	1.00	Volts
Reverse Leakage @ $V_R = 60 \text{ V}$	I_R	***	25	nA
Reverse Leakage @ $V_R = 60 \text{ V}, 100 \text{ }^\circ\text{C}$	I_R	***	0.005	mA



6 Lake Street - Lawrence, MA 01841

Tel: 978-681-0392 - Fax: 978-681-9135



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.