

CentralTM Semiconductor Corp.

145 Adams Avenue, Hauppauge, NY 11788 USA
Tel: (631) 435-1110 • Fax: (631) 435-1824

Manufacturers of World Class Discrete Semiconductors

1N5614
1N5616
1N5618
1N5620
1N5622

GLASS PASSIVATED RECTIFIER
1.0 AMPS, 200 THRU 1000 VOLTS

GPR-1A CASE

DESCRIPTION


The CENTRAL SEMICONDUCTOR 1N5614 series types are silicon rectifiers mounted in a hermetically sealed, glass passivated package for general applications where high reliability is desired.

MAXIMUM RATINGS (TA=25°C unless otherwise noted)

	SYMBOL	1N5614	1N5616	1N5618	1N5620	1N5622	UNIT
Peak Repetitive Reverse Voltage	VRRM	200	400	600	800	1000	V
DC Blocking Voltage	VR	200	400	600	800	1000	V
RMS Reverse Voltage	VR(RMS)	140	280	420	560	700	V
Average Forward Current (TA=55°C)	IO			1.0			A
Peak Forward Surge Current	IFSM			50			A
Operating and Storage Junction Temperature	TJ, TSTG			-65 TO +200			°C

ELECTRICAL CHARACTERISTICS (TA=25°C unless otherwise noted)

SYMBOL	TEST CONDITIONS	MIN	MAX	UNIT
IR	VR=Rated VRRM		0.5	µA
IR	VR=Rated VRRM, TA=100°C		25	µA
VF	IF=1.0A		1.2	V
BVR	IR=50µA (1N5614)	220		V
BVR	IR=50µA (1N5616)	440		V
BVR	IR=50µA (1N5618)	660		V
BVR	IR=50µA (1N5620)	880		V
BVR	IR=50µA (1N5622)	1100		V
C	VR=12V, f=130kHz		35	pF
trr	IF=0.5A, IR=1.0A, Recov. to 0.25A		2.0	µs

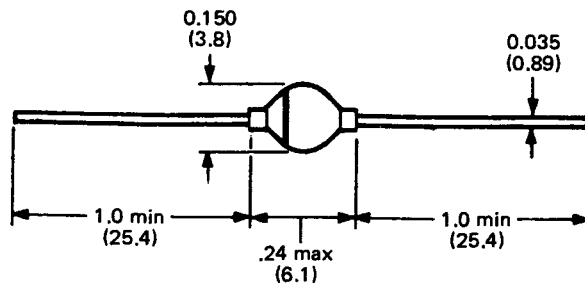

DIMENSIONS IN INCHES (MILLIMETERS)



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.