

NPN SILICON HIGH POWER TRANSISTOR

Qualified per MIL-PRF-19500/208

Devices

2N1487 2N1488 2N1489 2N1490

Qualified Level


MAXIMUM RATINGS

Ratings	Symbol	2N1487 2N1498	2N1488 2N1490	Unit
Collector-Emitter Voltage	V_{CEO}	40	55	Vdc
Collector-Base Voltage	V_{CBO}	60	100	Vdc
Collector-Emitter Voltage	V_{CEX}	60	100	Vdc
Emitter-Base Voltage	V_{EBO}	10		Vdc
Base Current	I_B	3.0		Adc
Collector Current	I_C	6.0		Adc
Total Power Dissipation @ $T_C = 25^{\circ}C$ ⁽¹⁾	P_T	75		W
Operating & Storage Junction Temperature Range	T_J, T_{stg}	-65 to +200		$^{\circ}C$

THERMAL CHARACTERISTICS

Characteristics	Symbol	Max.	Unit
Thermal Resistance, Junction-to-Case	$R_{\theta JC}$	2.33	$^{\circ}C/W$

1) Derate linearly @ 0.429 W/ $^{\circ}C$ for $T_C > 25^{\circ}C$

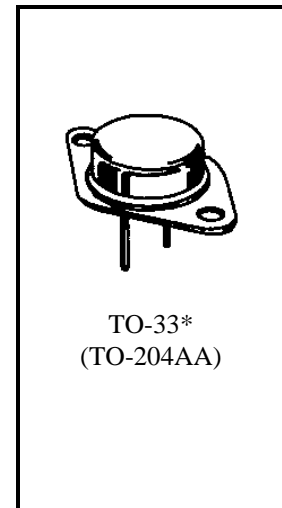

*See Appendix A for Package Outline

ELECTRICAL CHARACTERISTICS ($T_C = 25^{\circ}C$ unless otherwise noted)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

OFF CHARACTERISTICS

Collector-Emitter Breakdown Voltage $I_C = 100$ mAdc	2N1487, 2N1489 2N1488, 2N1490	$V_{(BR)CEO}$	40 55	Vdc
Collector-Emitter Breakdown Voltage $I_C = 200$ μ Adc	2N1487, 2N1489 2N1488, 2N1490	$V_{(BR)CBO}$	60 100	Vdc
Collector-Emitter Breakdown Voltage $I_C = 0.5$ mAdc, $V_{EB} = 1.5$ Vdc	2N1487, 2N1489 2N1488, 2N1490	$V_{(BR)CEX}$	60 100	Vdc
Collector-Base Cutoff Current $V_{CB} = 30$ Vdc		I_{CBO}	25	μ Adc
Emitter-Base Cutoff Current $V_{EB} = 10$ Vdc		I_{EBO}	25	μ Adc

2N1487, 2N1488, 2N1489, 2N1490 JAN SERIES

ELECTRICAL CHARACTERISTICS (con't)

Characteristics	Symbol	Min.	Max.	Unit
-----------------	--------	------	------	------

ON CHARACTERISTICS ⁽²⁾

Forward-Current Transfer Ratio $I_C = 1.5 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$	2N1487, 2N1488 2N1489, 2N1490	h_{FE}	15 25	45 75	
Collector-Emitter Saturation Voltage $I_C = 1.5 \text{ Adc}, I_B = 300 \text{ mAdc}$ $I_C = 1.5 \text{ Adc}, I_B = 100 \text{ mAdc}$	2N1487, 2N1488 2N1489, 2N1490	$V_{CE(sat)}$		3.0 1.0	Vdc
Base-Emitter Voltage $I_C = 1.5 \text{ Adc}, V_{CE} = 4.0 \text{ Vdc}$	2N1487, 2N1488 2N1489, 2N1490	$V_{BE(on)}$		3.0 2.0	Vdc

DYNAMIC CHARACTERISTICS

Small-Signal Short-Circuit Forward Current Transfer Ratio Cutoff Frequency $I_C = 100 \text{ mAdc}, V_{CB} = 12 \text{ Vdc}$		$ f_{hfb} $	500		kc
Output Capacitance $V_{CB} = 10 \text{ Vdc}, I_E = 0, 100 \text{ kHz} \leq f \leq 1.0 \text{ MHz}$		C_{obo}		700	pF

SWITCHING CHARACTERISTICS

Turn-On / Turn-Off Time $V_{CC} = 12 \text{ Vdc}; I_{B0} = I_{B2} = 150 \text{ mAdc}; I_{B1} = 300 \text{ mAdc}; R_C = 7.8 \Omega$		$t_{on} + t_{off}$		25	μs
---	--	--------------------	--	----	---------------

(2) Pulse Test: Pulse Width = 300 μs , Duty Cycle $\leq 2.0\%$.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.