



T-3¼ Jumbo LEDs (10mm)

	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Drawing
				Minimum	Maximum		Typical	Maximum		
ULTRA BRIGHT ● RED	1	E186	Diffused	550mcd	650mcd	60°	1.85V	2.5V	660nm	A
HIGH EFFICIENCY ● RED	2	E176	Diffused	20mcd	100mcd	50°	2.0V	2.5V	625nm	A
ULTRA BRIGHT ● ORANGE	3	E179	Diffused	400mcd	1000mcd	60°	1.95V	2.5V	620nm	A
● YELLOW	4	E177	Diffused	20mcd	70mcd	50°	2.1V	2.5V	590nm	A
● GREEN	5	E178	Diffused	20mcd	70mcd	50°	2.2V	2.5V	565nm	A

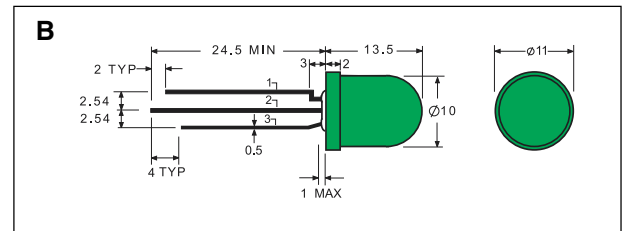

T-3¼ Jumbo, Bi-Color LED (10mm)

	Line No.	Part No.	Lens	Luminous Intensity at 20mA		Viewing Angle 2θ½	Forward Voltage at 20mA		Peak Wave Length at 20mA	Leads	Drawing
				Minimum	Maximum		Typical	Maximum			
● RED & ● GREEN	6	E187	White Diffused	100mcd	300mcd	50°	1.85V	2.5V	660nm	1.Red Anode 2.Cathode 3.Green Anode	B
● RED & ● GREEN	7	E188	White Diffused	30mcd	90mcd	50°	2.0V	2.5V	660nm	1.Red Anode 2.Cathode 3.Green Cathode	B
● GREEN & ● YELLOW	8	E189	White Diffused	20mcd	60mcd	50°	2.2V	2.5V	565nm	1.Green Anode 2.Cathode 3.Yellow Anode	B

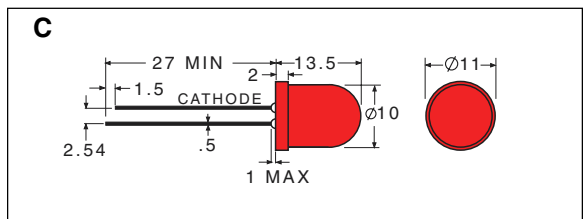

T-3¼ Jumbo, Flashing LEDs (10mm)

	Line No.	Part No.	Lens	Forward D.C. Voltage			Forward Current (mA)			Luminous Intensity at 9.0VDC		Viewing Angle 2θ½	Frequency (Hz)	Peak Wave Length	Drawing
				Min	Typical	Max	Min	Typical	Max	Min	Max				
● RED	9	E162	Diffused	3.5	12.0	13.0	38	56	70	100mcd	400mcd	60°	2.5 - 1.5	660nm	C
● YELLOW	10	E163	Diffused	3.5	12.0	13.0	38	56	70	20mcd	70mcd	60°	2.5 - 1.5	590nm	C
● GREEN	11	E164	Diffused	3.5	12.0	13.0	38	56	70	20mcd	70mcd	60°	2.5 - 1.5	565nm	C



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.