


MECHANICAL DATA

Dimensions in mm (inches)

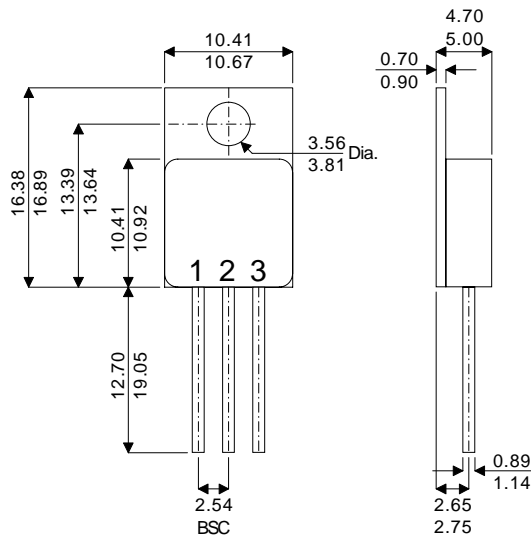

TO-220M – Metal Package

Pad 1 – Gate Pad 2 – Drain Pad 3 – Source

**P-CHANNEL
POWER MOSFET
FOR HI-REL
APPLICATIONS**

V_{DSS} **-100V**
 $I_{D(cont)}$ **-9.3A**
 $R_{DS(on)}$ **0.31Ω**

FEATURES

- HERMETICALLY SEALED TO-220 METAL PACKAGE
- SIMPLE DRIVE REQUIREMENTS
- LIGHTWEIGHT
- SCREENING OPTIONS AVAILABLE
- ALL LEADS ISOLATED FROM CASE

ABSOLUTE MAXIMUM RATINGS ($T_{case} = 25^{\circ}C$ unless otherwise stated)

V_{GS}	Gate – Source Voltage	±20V
I_D	Continuous Drain Current @ $T_{case} = 25^{\circ}C$	-9.3A
I_D	Continuous Drain Current @ $T_{case} = 100^{\circ}C$	-5.8A
I_{DM}	Pulsed Drain Current	-37A
P_D	Power Dissipation @ $T_{case} = 25^{\circ}C$	45W
	Linear Derating Factor	0.36W/°C
T_J, T_{stg}	Operating and Storage Temperature Range	-55 to 150°C
$R_{\theta JC}$	Thermal Resistance Junction to Case	2.8°C/W max.
$R_{\theta JA}$	Thermal Resistance Junction to Ambient	80°C/W max.

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise stated)

Parameter	Test Conditions	Min.	Typ.	Max.	Unit
STATIC ELECTRICAL RATINGS					
BV_{DSS}	Drain – Source Breakdown Voltage	$V_{GS} = 0$ $I_D = 1\text{mA}$	-100		V
$\frac{\Delta BV_{DSS}}{\Delta T_J}$	Temperature Coefficient of Breakdown Voltage	Reference to 25°C $I_D = 1\text{mA}$		-0.1	$\text{V}/^\circ\text{C}$
$R_{DS(on)}$	Static Drain – Source On–State Resistance	$V_{GS} = 10\text{V}$ $I_D = -5.8\text{A}$		0.31	Ω
		$V_{GS} = 10\text{V}$ $I_D = -9.3\text{A}$		0.36	
$V_{GS(th)}$	Gate Threshold Voltage	$V_{DS} = V_{GS}$ $I_D = 250\mu\text{A}$	-2	-4	V
g_{fs}	Forward Transconductance	$V_{DS} \geq 15\text{V}$ $I_{DS} = -5.8\text{A}$	2.5		$\text{S}(\bar{v})$
I_{DSS}	Zero Gate Voltage Drain Current	$V_{GS} = 0$ $V_{DS} = 0.8BV_{DSS}$ $T_J = 125^\circ\text{C}$		-25	μA
				-250	
I_{GSS}	Forward Gate – Source Leakage	$V_{GS} = 20\text{V}$		-100	nA
I_{GSS}	Reverse Gate – Source Leakage	$V_{GS} = -20\text{V}$		100	
DYNAMIC CHARACTERISTICS					
C_{iss}	Input Capacitance	$V_{GS} = 0$		800	pF
C_{oss}	Output Capacitance	$V_{DS} = 25\text{V}$		350	
C_{rss}	Reverse Transfer Capacitance	$f = 1\text{MHz}$		125	
Q_g	Total Gate Charge	$V_{GS} = 10\text{V}$ $I_D = -9.3\text{A}$ $V_{DS} = 0.5BV_{DSS}$	14.7	30	nC
Q_{gs}	Gate – Source Charge	$I_D = -9.3\text{A}$	1	7.1	nC
Q_{gd}	Gate – Drain (“Miller”) Charge	$V_{DS} = 0.5BV_{DSS}$	2	21	
$t_{d(on)}$	Turn–On Delay Time	$V_{DD} = -50\text{V}$ $I_D = -9.3\text{A}$ $R_G = 7.5\Omega$		60	ns
t_r	Rise Time			140	
$t_{d(off)}$	Turn–Off Delay Time			140	
t_f	Fall Time			140	
SOURCE – DRAIN DIODE CHARACTERISTICS					
I_S	Continuous Source Current			-9.3	A
I_{SM}	Pulse Source Current			-37	
V_{SD}	Diode Forward Voltage	$I_S = -9.3\text{A}$ $T_J = 25^\circ\text{C}$ $V_{GS} = 0$		-4.7	V
t_{rr}	Reverse Recovery Time	$I_S = -9.3\text{A}$ $T_J = 25^\circ\text{C}$		250	ns
Q_{rr}	Reverse Recovery Charge	$d_i / d_t \leq 100\text{A}/\mu\text{s}$ $V_{DD} \leq 50\text{V}$		3	μC
PACKAGE CHARACTERISTICS					
L_D	Internal Drain Inductance	(from 6mm down drain lead pad to centre of die)		8.7	nH
L_S	Internal Source Inductance	(from 6mm down source lead to centre of source bond pad)		8.7	



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.