




# HER101 THRU HER108

**HIGH EFFICIENCY RECTIFIER**  
**Reverse Voltage - 50 to 1000 Volts**  
**Forward Current - 1.0 Ampere**

## Features

- Low power loss, high efficiency
- Low leakage
- Low forward voltage
- High current capability
- High speed switching
- High surge capability
- High reliability

## DO-41

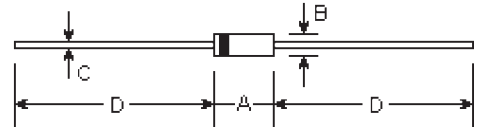

## Mechanical Data

- **Case:** Molded plastic
- **Epoxy:** UL94V-0 rate flame retardant
- **Lead:** MIL-STD-202E method 208C guaranteed
- **Mounting Position:** Any
- **Weight:** 0.012 ounce, 0.33 gram

DIMENSIONS					Note
DIM	inches		mm		
	Min.	Max.	Min.	Max.	
A	0.165	0.205	4.2	5.2	
B	0.079	0.106	2.0	2.7	φ
C	0.028	0.034	0.71	0.86	φ
D	1.000	-	25.40	-	

## Maximum Ratings and Electrical Characteristics

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

	Symbols	HER 101	HER 102	HER 103	HER 104	HER 105	HER 106	HER 107	HER 108	Units
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	300	400	600	800	1000	Volts
Maximum RMS voltage	$V_{RMS}$	35	70	140	210	280	420	560	700	Volts
Maximum DC blocking voltage	$V_{DC}$	50	100	200	300	400	600	800	1000	Volts
Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=50^\circ\text{C}$	$I_{(AV)}$	1.0								Amp
Peak forward surge current, 8.3mS single half sine-wave superimposed on rated load (MIL-STD-750D 4066 method)	$I_{FSM}$	30.0								Amps
Maximum instantaneous forward voltage at 1.0A DC	$V_F$	1.0		1.3		1.5		1.7		Volts
Maximum full load reverse current average, full cycle 0.375" (9.5mm) lead length at $T_L=55^\circ\text{C}$	$I_{R(AV)}$	100.0								μ A
Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$	$I_R$	5.0								μ A
Maximum reverse recovery time (Note 1)	$T_{rr}$	50				75				nS
Typical junction capacitance (Note 2)	$C_j$	15				12				μ F
Operating and storage temperature range	$T_J, T_{STG}$	-65 to +150								°C

Notes:

(1) Test conditions:  $I_F=0.5A$ ,  $I_R=1.0A$ ,  $I_T=0.25A$

(2) Measured at 1.0MHz and applied reverse voltage of 4.0 volts

# RATINGS AND CHARACTERISTIC CURVES

FIG. 1 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

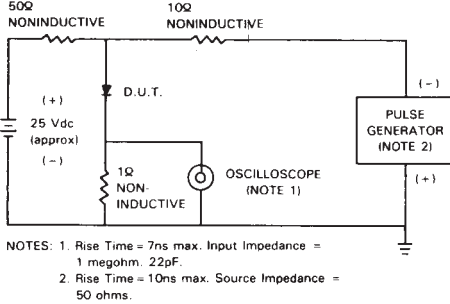


FIG. 2 - TYPICAL FORWARD CURRENT DERATING CURVE




FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

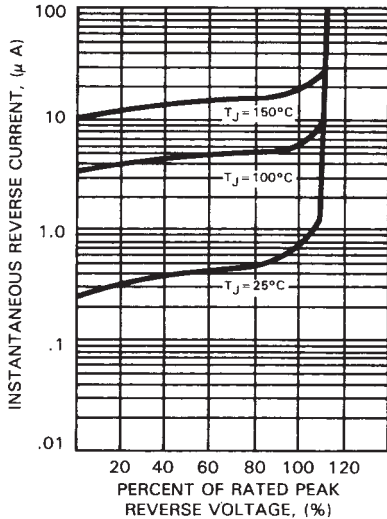


FIG. 5 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

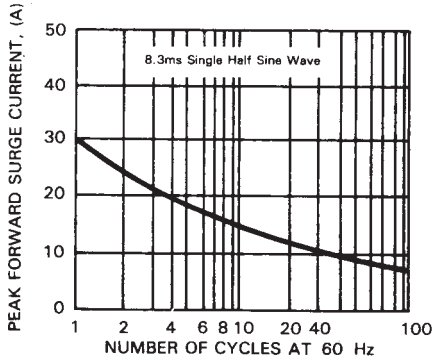


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


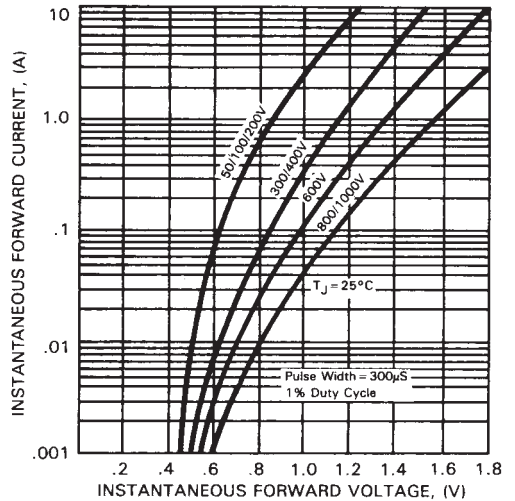


FIG. 6 - TYPICAL JUNCTION CAPACITANCE



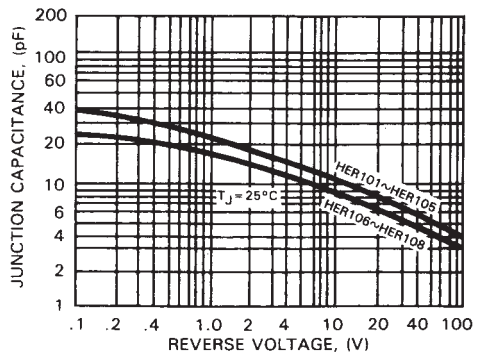

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.