


Silicon Variable Capacitance Diode

BB 419

- For VHF tuned circuit applications

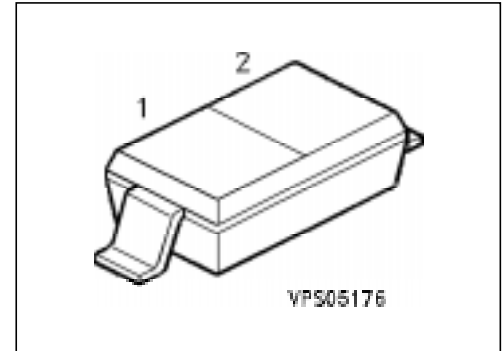

Type	Marking	Ordering Code (tape and reel)	Pin Configuration	Package ¹⁾
BB 419	white 2	Q62702-B499		SOD-123

Maximum Ratings

Parameter	Symbol	Values	Unit
Reverse voltage	V_R	28	V
Peak reverse voltage	V_{RM}	30	
Forward current, $T_A \leq 60 \text{ }^\circ\text{C}$	I_F	20	mA
Operating temperature range	T_{op}	- 55 ... + 125	$^\circ\text{C}$
Storage temperature range	T_{stg}	- 55 ... + 150	

Thermal Resistance

Junction - ambient	$R_{th JA}$	≤ 450	K/W
--------------------	-------------	------------	-----


¹⁾ For detailed information see chapter Package Outlines.

Electrical Characteristics

at $T_A = 25\text{ °C}$, unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
Reverse current $V_R = 28\text{ V}$ $V_R = 28\text{ V}, T_A = 60\text{ °C}$	I_R	– –	– –	20 200	nA
Diode capacitance, $f = 1\text{ MHz}$ $V_R = 3\text{ V}$ $V_R = 25\text{ V}$	C_T	26 4.3	– –	32 6	pF
Capacitance ratio $f = 1\text{ MHz}, V_R = 3\text{ V}, 25\text{ V}$	C_{T3} / C_{T25}	5	–	6.5	–
Capacitance matching $V_R = 3\text{ V} \dots 25\text{ V}$	$\Delta C_T / C_T$	–	–	3	%
Series resistance $f = 100\text{ MHz}, C_T = 12\text{ pF}$	r_s	–	0.35	0.5	Ω
Figure of merit $f = 50\text{ MHz}, V_R = 3\text{ V}$ $f = 200\text{ MHz}, V_R = 25\text{ V}$	Q	–	280 600	–	–

Diode capacitance $C_T = f(V_R)$

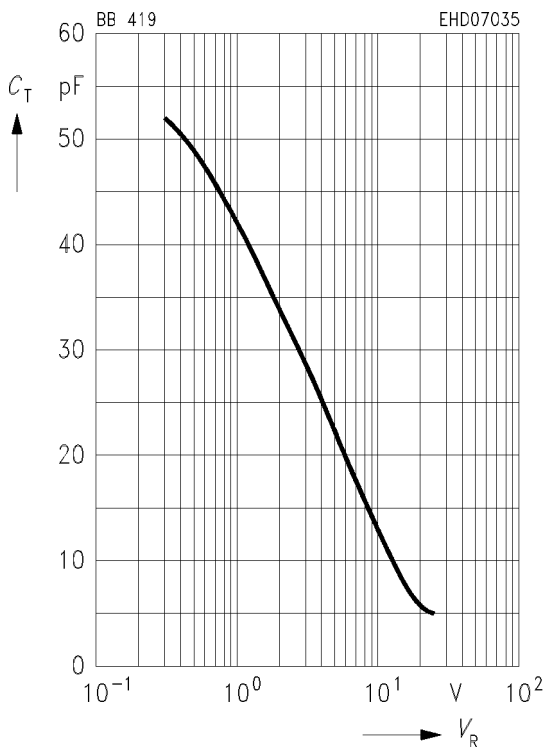



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.