

## SIPMOS® Power Transistor



## BUZ 100SL

### Features

- N channel
- Enhancement mode
- Avalanche rated
- Logic Level
- $dv/dt$  rated
- 175 °C operating temperature

### Product Summary

Drain source voltage	$V_{DS}$	55	V
Drain-Source on-state resistance	$R_{DS(on)}$	0.012	$\Omega$
Continuous drain current	$I_D$	70	A



Type	Package	Ordering Code	Packaging	Pin 1	Pin 2	Pin 3
BUZ100SL	P-TO220-3-1	Q67040-S4000-A2	Tube	G	D	S
BUZ100SL E3045A	P-TO263-3-2	Q67040-S4000-A6	Tape and Reel			
BUZ100SL E3045	P-TO263-3-2	Q67040-S4000-A5	Tube			

### Maximum Ratings, at $T_j = 25\text{ °C}$ , unless otherwise specified

Parameter	Symbol	Value	Unit
Continuous drain current $T_C = 25\text{ °C}$ $T_C = 100\text{ °C}$	$I_D$	70 50	A
Pulsed drain current $T_C = 25\text{ °C}$	$I_{Dpulse}$	280	
Avalanche energy, single pulse $I_D = 70\text{ A}$ , $V_{DD} = 25\text{ V}$ , $R_{GS} = 25\text{ }\Omega$	$E_{AS}$	380	mJ
Avalanche energy, periodic limited by $T_{jmax}$	$E_{AR}$	17	
Reverse diode $dv/dt$ $I_S = 70\text{ A}$ , $V_{DS} = 40\text{ V}$ , $di/dt = 200\text{ A}/\mu\text{s}$ , $T_{jmax} = 175\text{ °C}$	$dv/dt$	6	kV/ $\mu\text{s}$
Gate source voltage	$V_{GS}$	$\pm 20$	V
Power dissipation $T_C = 25\text{ °C}$	$P_{tot}$	170	W
Operating and storage temperature	$T_j, T_{stg}$	-55... +175	°C
IEC climatic category; DIN IEC 68-1		55/175/56	

**Thermal Characteristics**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Characteristics</b>					
Thermal resistance, junction - case	$R_{thJC}$	-	-	0.88	K/W
Thermal resistance, junction - ambient, leded	$R_{thJA}$	-	-	62	
SMD version, device on PCB: @ min. footprint @ 6 cm <sup>2</sup> cooling area <sup>1)</sup>	$R_{thJA}$	-	-	62 40	

**Electrical Characteristics, at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified**

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Static Characteristics</b>					
Drain- source breakdown voltage $V_{GS} = 0\text{ V}$ , $I_D = 0.25\text{ mA}$ , $T_j = 25\text{ }^\circ\text{C}$	$V_{(BR)DSS}$	55	-	-	V
Gate threshold voltage, $V_{GS} = V_{DS}$ $I_D = 130\text{ }\mu\text{A}$	$V_{GS(th)}$	1.2	1.6	2	
Zero gate voltage drain current $V_{DS} = 50\text{ V}$ , $V_{GS} = 0\text{ V}$ , $T_j = 25\text{ }^\circ\text{C}$ $V_{DS} = 50\text{ V}$ , $V_{GS} = 0\text{ V}$ , $T_j = 150\text{ }^\circ\text{C}$	$I_{DSS}$	-	0.1	1 100	$\mu\text{A}$
Gate-source leakage current $V_{GS} = 20\text{ V}$ , $V_{DS} = 0\text{ V}$	$I_{GSS}$	-	10	100	nA
Drain-Source on-state resistance $V_{GS} = 4.5\text{ V}$ , $I_D = 50\text{ A}$ $V_{GS} = 10\text{ V}$ , $I_D = 50\text{ A}$	$R_{DS(on)}$	-	0.016 0.01	0.018 0.012	$\Omega$

<sup>1</sup> Device on 40mm\*40mm\*1.5mm epoxy PCB FR4 with 6 cm<sup>2</sup> (one layer, 70 $\mu\text{m}$  thick) copper area for drain connection. PCB is vertical without blown air.

**Electrical Characteristics**, at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Dynamic Characteristics</b>					
Transconductance $V_{DS} \geq 2 \cdot I_D \cdot R_{DS(on)max}$ , $I_D = 50\text{ A}$	$g_{fs}$	25	58	-	S
Input capacitance $V_{GS} = 0\text{ V}$ , $V_{DS} = 25\text{ V}$ , $f = 1\text{ MHz}$	$C_{iss}$	-	2130	2660	pF
Output capacitance $V_{GS} = 0\text{ V}$ , $V_{DS} = 25\text{ V}$ , $f = 1\text{ MHz}$	$C_{oss}$	-	600	750	
Reverse transfer capacitance $V_{GS} = 0\text{ V}$ , $V_{DS} = 25\text{ V}$ , $f = 1\text{ MHz}$	$C_{rss}$	-	320	400	
Turn-on delay time $V_{DD} = 30\text{ V}$ , $V_{GS} = 4.5\text{ V}$ , $I_D = 70\text{ A}$ , $R_G = 2.2\text{ }\Omega$	$t_{d(on)}$	-	15	25	ns
Rise time $V_{DD} = 30\text{ V}$ , $V_{GS} = 4.5\text{ V}$ , $I_D = 70\text{ A}$ , $R_G = 2.2\text{ }\Omega$	$t_r$	-	70	105	
Turn-off delay time $V_{DD} = 30\text{ V}$ , $V_{GS} = 4.5\text{ V}$ , $I_D = 70\text{ A}$ , $R_G = 2.2\text{ }\Omega$	$t_{d(off)}$	-	40	60	
Fall time $V_{DD} = 30\text{ V}$ , $V_{GS} = 4.5\text{ V}$ , $I_D = 70\text{ A}$ , $R_G = 2.2\text{ }\Omega$	$t_f$	-	25	40	

**Electrical Characteristics, at  $T_j = 25\text{ }^\circ\text{C}$ , unless otherwise specified**


Parameter	Symbol	Values			Unit
		min.	typ.	max.	
<b>Dynamic Characteristics</b>					
Gate to source charge $V_{DD} = 40\text{ V}, I_D = 70\text{ A}$	$Q_{gs}$	-	10	15	nC
Gate to drain charge $V_{DD} = 40\text{ V}, I_D = 70\text{ A}$	$Q_{gd}$	-	35	52.5	
Gate charge total $V_{DD} = 40\text{ V}, I_D = 70\text{ A}, V_{GS} = 0\text{ to }10\text{ V}$	$Q_g$	-	85	130	
Gate plateau voltage $V_{DD} = 40\text{ V}, I_D = 70\text{ A}$	$V_{(\text{plateau})}$	-	4.1	-	V

**Reverse Diode**

Inverse diode continuous forward current $T_C = 25\text{ }^\circ\text{C}$	$I_S$	-	-	70	A
Inverse diode direct current,pulsed $T_C = 25\text{ }^\circ\text{C}$	$I_{SM}$	-	-	280	
Inverse diode forward voltage $V_{GS} = 0\text{ V}, I_F = 140\text{ A}$	$V_{SD}$	-	1.25	1.8	V
Reverse recovery time $V_R = 30\text{ V}, I_F = I_S, di_F/dt = 100\text{ A}/\mu\text{s}$	$t_{rr}$	-	110	165	ns
Reverse recovery charge $V_R = 30\text{ V}, I_F = I_S, di_F/dt = 100\text{ A}/\mu\text{s}$	$Q_{rr}$	-	0.23	0.35	$\mu\text{C}$

**Power Dissipation**


$P_{tot} = f(T_C)$

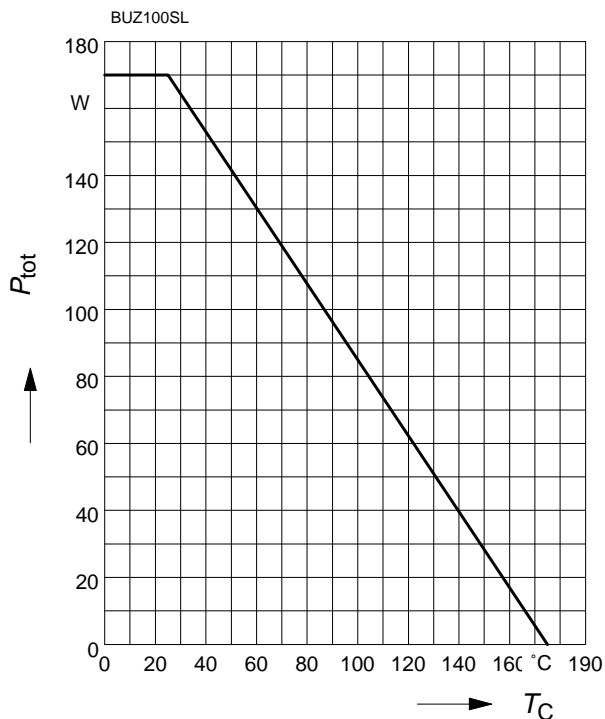

**Drain current**

$I_D = f(T_C)$


parameter:  $V_{GS} \geq 10\text{ V}$

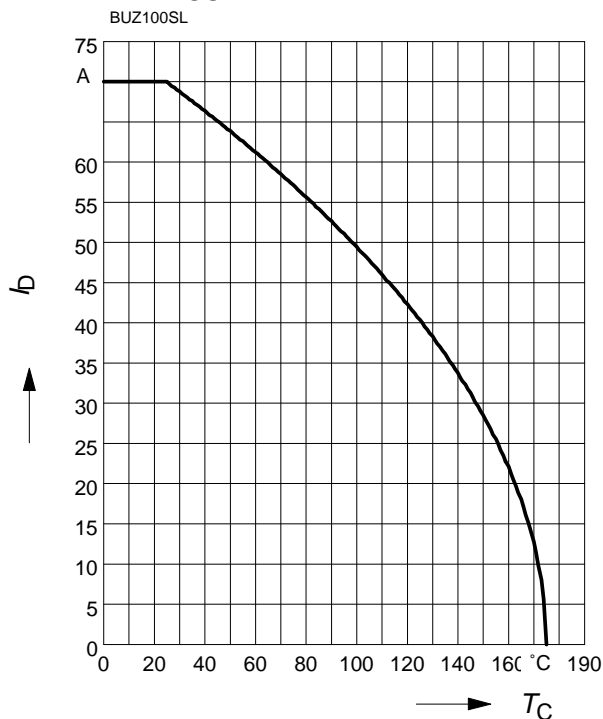

**Safe operating area**

$I_D = f(V_{DS})$


parameter :  $D = 0, T_C = 25\text{ °C}$

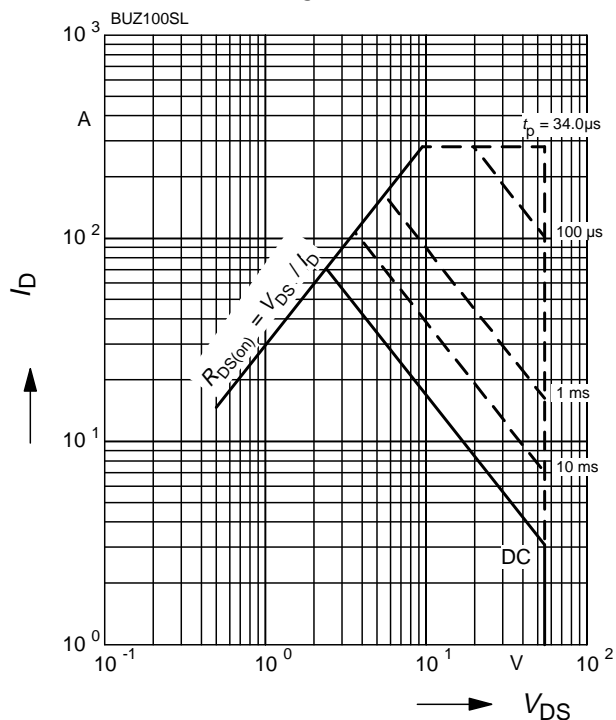

**Transient thermal impedance**


$Z_{thJC} = f(t_p)$

parameter :  $D = t_p/T$

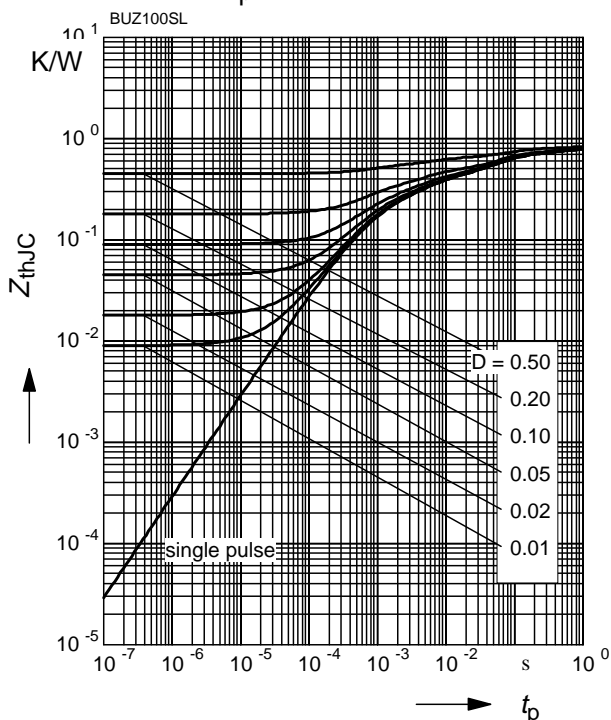


**Typ. output characteristics**

$I_D = f(V_{DS})$   
parameter:  $t_p = 80 \mu s$

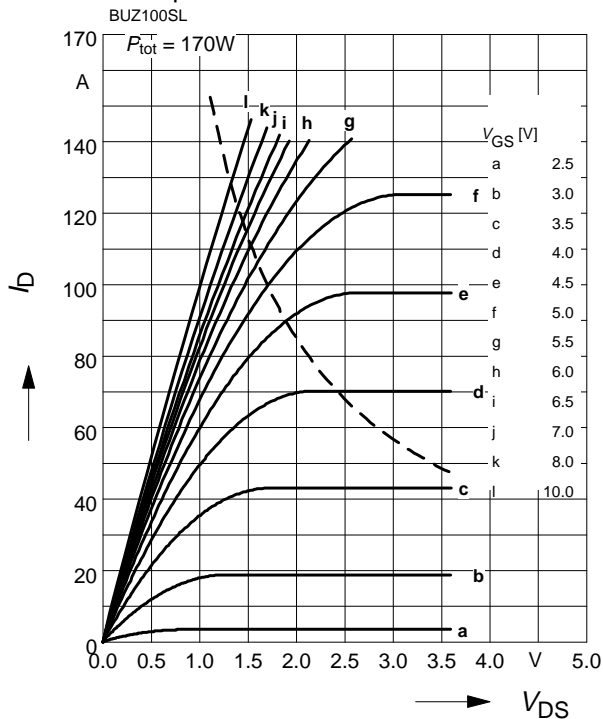


**Typ. drain-source-on-resistance**

$R_{DS(on)} = f(I_D)$   
parameter:  $V_{GS}$

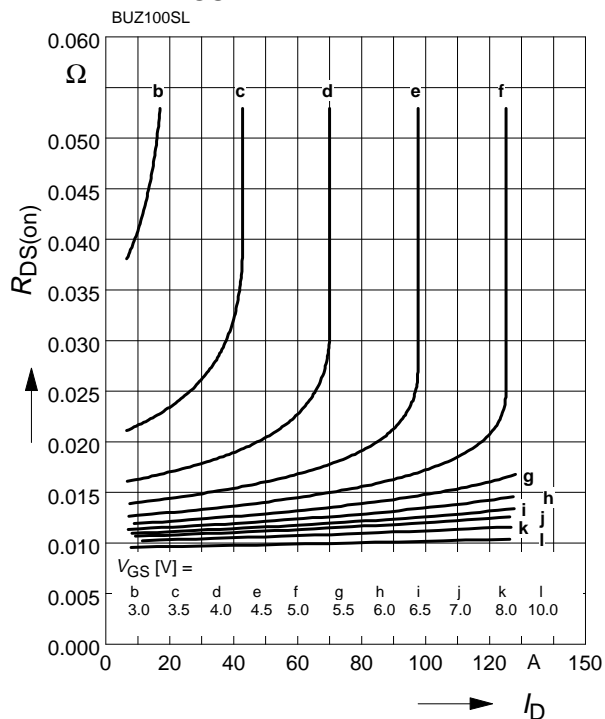


**Typ. transfer characteristics  $I_D = f(V_{GS})$**

parameter:  $t_p = 80 \mu s$   
 $V_{DS} \geq 2 \times I_D \times R_{DS(on)max}$

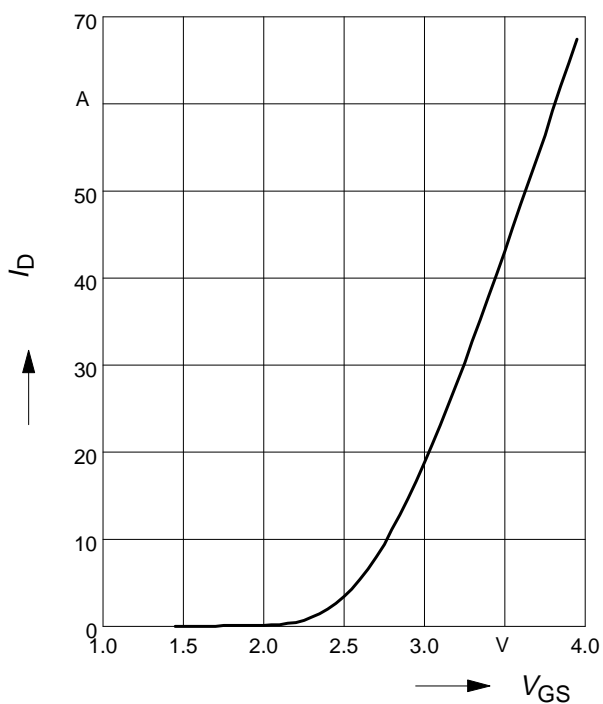

**Typ. forward transconductance**


$g_{fs} = f(I_D); T_j = 25^\circ C$   
parameter:  $g_{fs}$

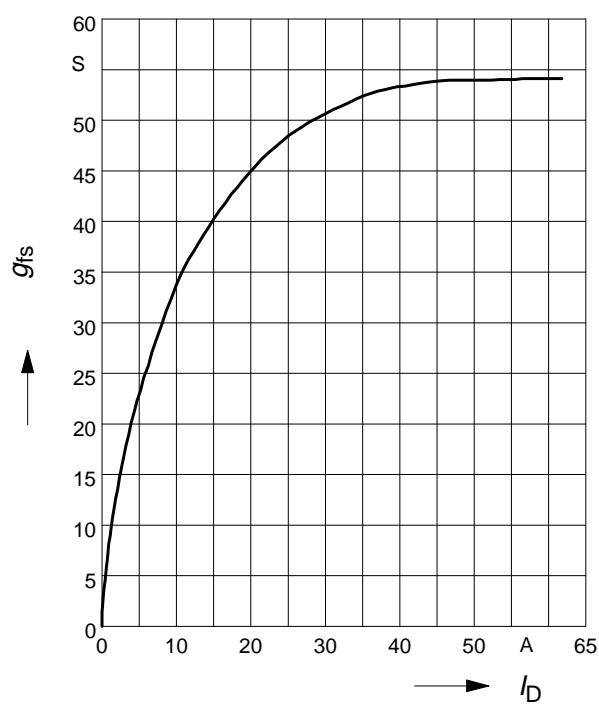

**Drain-source on-resistance**

$$R_{DS(on)} = f(T_j)$$


parameter :  $I_D = 50 \text{ A}$ ,  $V_{GS} = 4.5 \text{ V}$

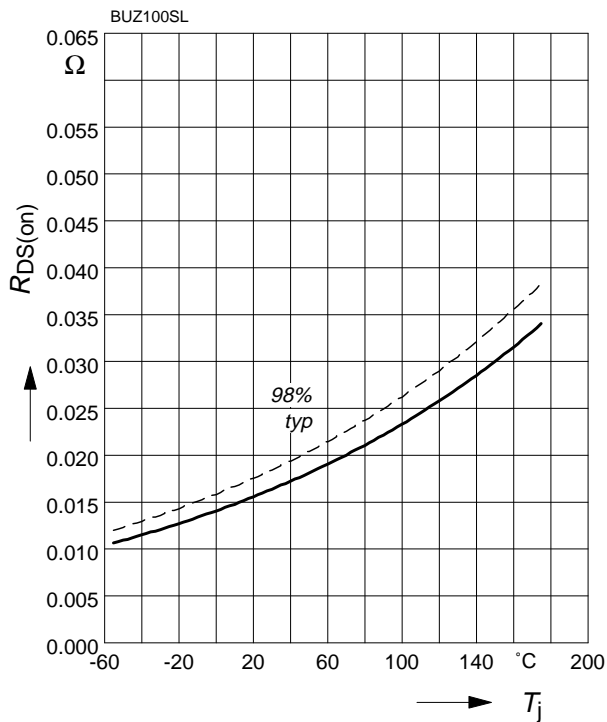

**Gate threshold voltage**

$$V_{GS(th)} = f(T_j)$$


parameter :  $V_{GS} = V_{DS}$ ,  $I_D = 130 \mu\text{A}$

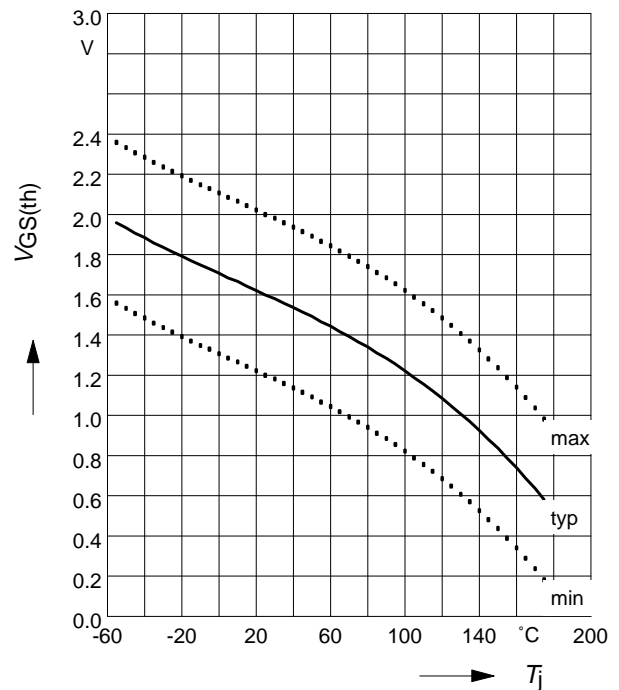

**Typ. capacitances**

$$C = f(V_{DS})$$


Parameter:  $V_{GS} = 0 \text{ V}$ ,  $f = 1 \text{ MHz}$

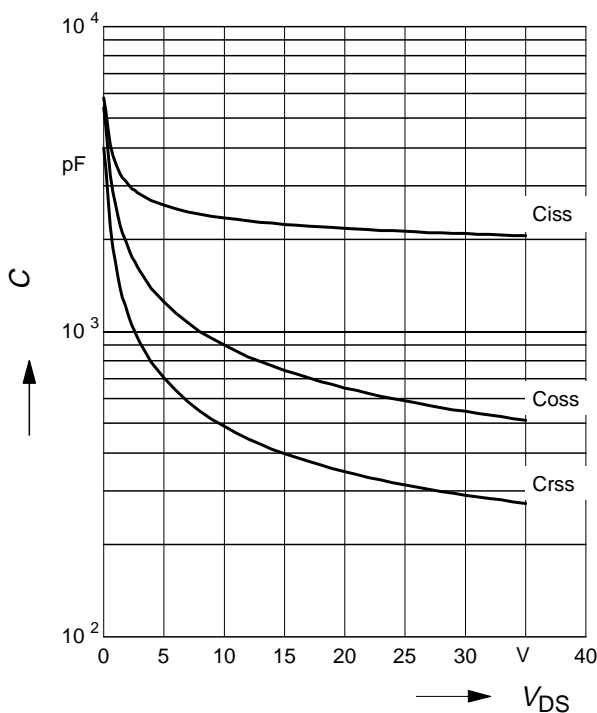

**Forward characteristics of reverse diode**

$$I_F = f(V_{SD})$$


parameter:  $T_j$ ,  $t_p = 80 \mu\text{s}$

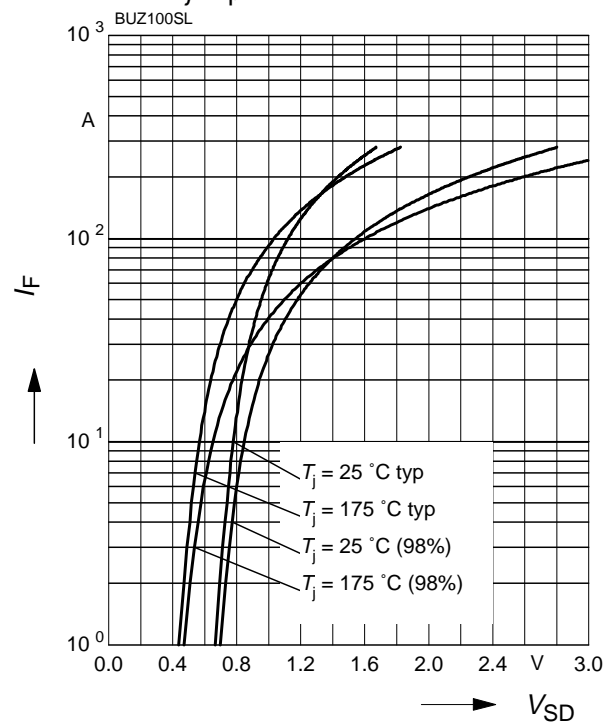

**Avalanche Energy  $E_{AS} = f(T_j)$**

parameter:  $I_D = 70\text{ A}$ ,  $V_{DD} = 25\text{ V}$


$R_{GS} = 25\ \Omega$

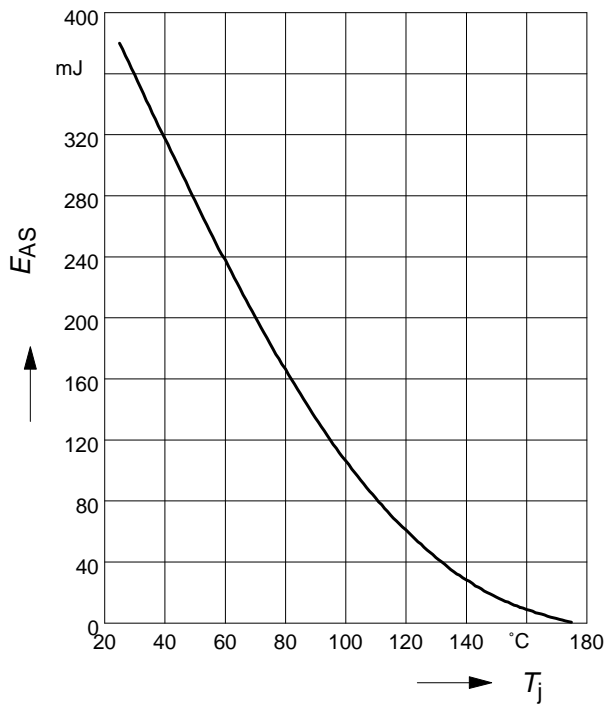

**Typ. gate charge**


$V_{GS} = f(Q_{Gate})$

parameter:  $I_{D\ puls} = 70\text{ A}$

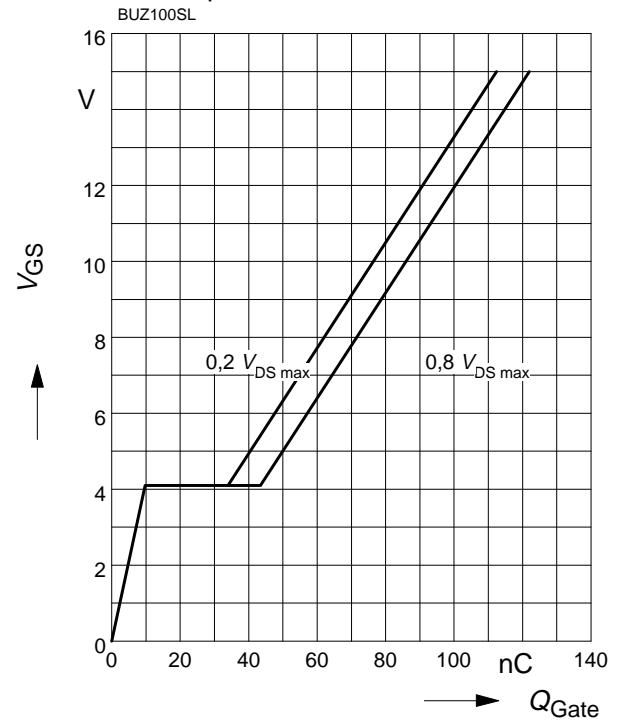

**Drain-source breakdown voltage**

$V_{(BR)DSS} = f(T_j)$

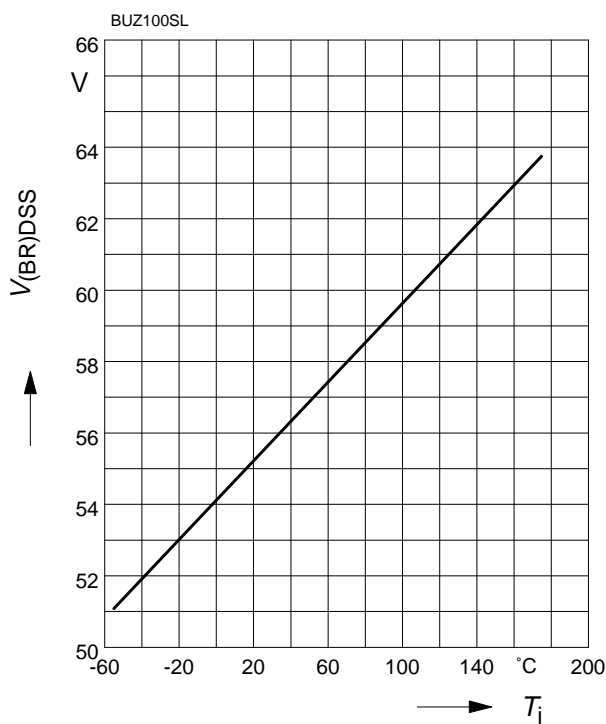



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.