



# 1 Amp Schottky Rectifier LSM140J — LSM150J

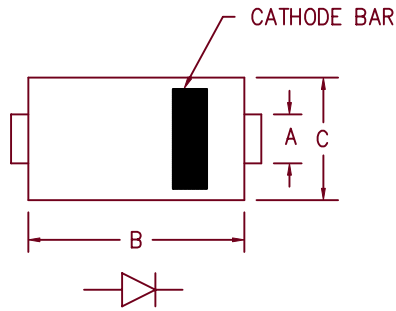

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.073	.087	1.85	2.21	
B	.160	.180	4.06	4.57	
C	.130	.155	3.30	3.94	
D	.205	.220	5.21	5.59	
E	.075	.130	1.91	3.30	
F	.030	.060	.760	1.52	

## DO-214BA Package

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
LSM140J	10BQ040 10MQ040N MBRA140TR, MBRS140TR	40V	40V
LSM145J		45V	45V
LSM150J		50V	50V

- Low Forward Voltage
- Schottky Barrier Rectifier
- Guard Ring Protection
- 150°C Junction Temperature
- $V_{RRM}$  40 to 50 Volts

### Electrical Characteristics

Average forward current	$I_F(AV)$ 1.0 Amps	$T_A = 130^\circ C$ , Square wave, $R_{\theta JC} = 15^\circ C/W$
Maximum surge current	$I_{FSM}$ 50 Amps	8.3ms, half sine, $T_J = 150^\circ C$
Max peak forward voltage	$V_{FM}$ .39 Volts	$I_{FM} = 0.1A; T_J = 25^\circ C^*$
Max peak forward voltage	$V_{FM}$ .58 Volts	$I_{FM} = 1.0A; T_J = 25^\circ C^*$
Max peak reverse current	$I_{RM}$ 1.0 mA	$V_{RRM}, T_J = 25^\circ C$
Typical junction capacitance	$C_J$ 60pF	$V_R = 5.0V, T_J = 25^\circ C$

\*Pulse test: Pulse width 300  $\mu$ sec. Duty cycle 2%

### Thermal and Mechanical Characteristics

Storage temperature range	$T_{STG}$	-55°C to 175°C
Operating junction temp range	$T_J$	-55°C to 150°C
Typical thermal Resistance	$R_{\theta JC}$	15°C/W Junction to case
Weight		.0047 ounces (.013 grams) typical

11-20-01 Rev. 2

# LSM140J — LSM150J

Figure 1  
Maximum Forward Characteristics

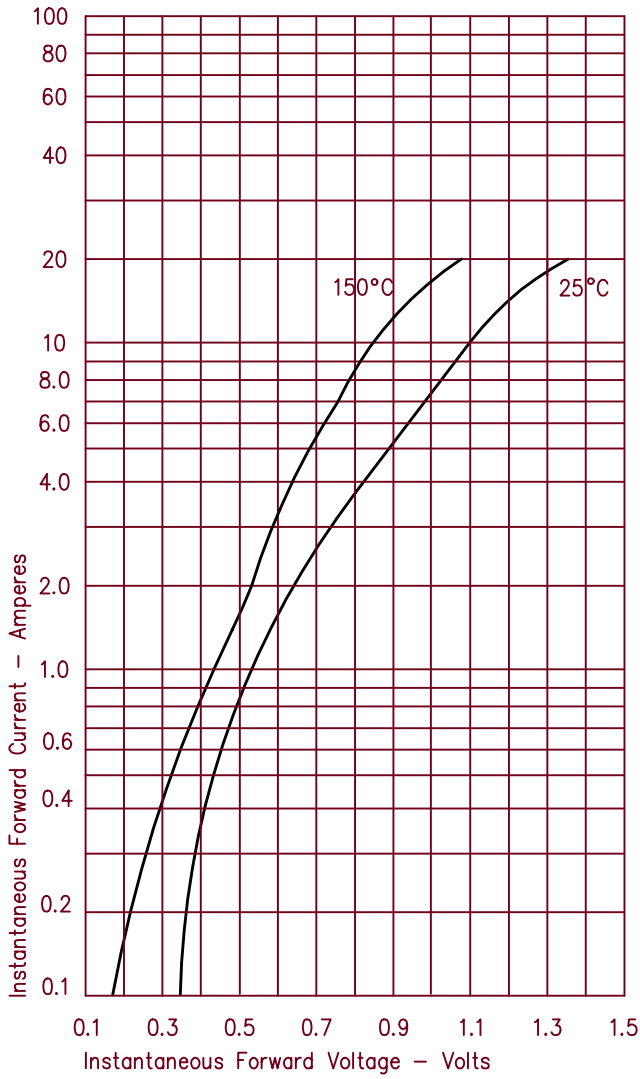


Figure 3  
Typical Junction Capacitance


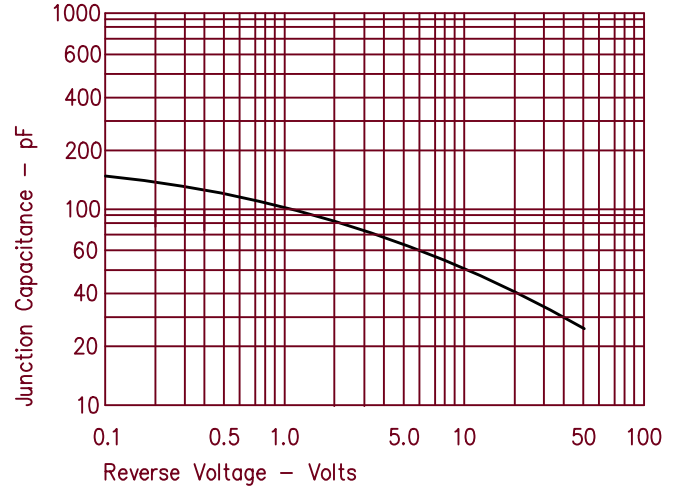


Figure 2  
Typical Reverse Characteristics



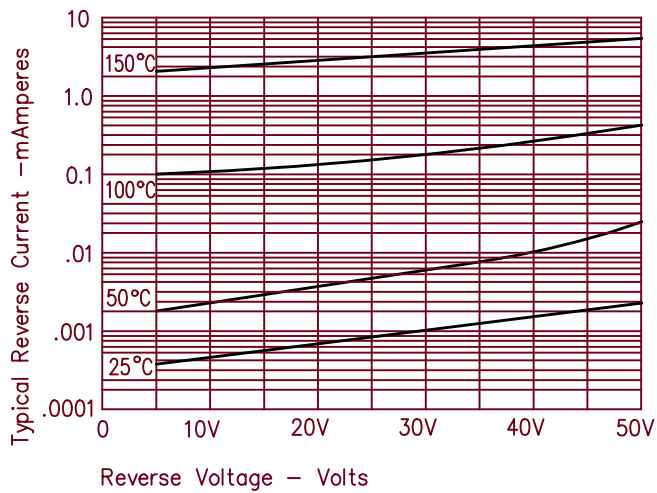

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.