



Microsemi Corp.
The diode experts

SCOTTSDALE, AZ

For more information call:
(602) 941-6300

**1N4099 thru
1N4135
and
1N4614 thru
1N4627
DO-7**

FEATURES

- ZENER VOLTAGE 1.8V to 100V
- ALL HAVE JAN, JANTX and JANTXV - 1 QUALIFICATIONS TO MIL-S-19500/435
- LOW NOISE
- LOW REVERSE LEAKAGE

MAXIMUM RATINGS

Junction and Storage Temperatures: -65°C to +200°C

DC Power Dissipation: 400 mW

Power Derating: 2.66 mW/°C above 50°C in DO-7

Forward Voltage @ 200 mA: 1.0 Volts 1N4099-1N4135

@ 100 mA: 1.0 Volts 1N4614-1N4627

**SILICON
400 mW
LOW NOISE
ZENER DIODES**

*** ELECTRICAL CHARACTERISTICS @ 25°C**

| JEDEC TYPE NO | NOMINAL ZENER VOLTAGE V _Z @ I _{ZT} (Note 1) | ZENER TEST CURRENT I _{ZT} | MAXIMUM ZENER IMPEDANCE Z _{ZT} (Note 2) | MAXIMUM REVERSE CURRENT I _Z @ V _R | MAXIMUM NOISE DENSITY N _D @ I _{ZT} (Figure 2) | MAXIMUM ZENER CURRENT I _{ZM} (Note 3) | MAXIMUM TEMP. COEFF. OF ZENER VOLTAGE α _{VZ} |
|---------------|---|------------------------------------|--|---|---|--|---|
| | VOLTS | μA | OHMS | μA VOLTS | μV/√Hz | mA | %/°C |
| 1N4614 | 1.8 | 250 | 1200 | 7.5 | 1 | 120 | -0.075 |
| 1N4615 | 2.0 | 250 | 1250 | 5.0 | 1 | 110 | -0.075 |
| 1N4616 | 2.2 | 250 | 1300 | 4.0 | 1 | 100 | -0.075 |
| 1N4617 | 2.4 | 250 | 1400 | 2.0 | 1 | 95 | -0.075 |
| 1N4618 | 2.7 | 250 | 1500 | 1.0 | 1 | 90 | -0.075 |
| 1N4619 | 3.0 | 250 | 1600 | 0.8 | 1 | 87 | -0.075 |
| 1N4620 | 3.3 | 250 | 1650 | 7.5 | 1.5 | 85 | -0.075 |
| 1N4621 | 3.6 | 250 | 1700 | 7.5 | 2 | 83 | -0.065 |
| 1N4622 | 3.9 | 250 | 1650 | 5.0 | 2 | 80 | -0.060 |
| 1N4623 | 4.3 | 250 | 1600 | 4.0 | 2 | 77 | -0.050 |
| 1N4624 | 4.7 | 250 | 1550 | 10.0 | 3 | 75 | -0.050 +0.020 |
| 1N4625 | 5.1 | 250 | 1500 | 10.0 | 3 | 70 | -0.045 +0.030 |
| 1N4626 | 5.6 | 250 | 1400 | 10.0 | 4 | 65 | -0.020 +0.040 |
| 1N4627 | 6.2 | 250 | 1200 | 10.0 | 5 | 61 | -0.010 +0.050 |
| 1N4099 | 6.8 | 250 | 200 | 10.0 | 5.17 | 40 | 0.060 |
| 1N4100 | 7.5 | 250 | 200 | 10.0 | 5.70 | 40 | 0.065 |
| 1N4101 | 8.2 | 250 | 200 | 1.0 | 6.24 | 40 | 0.070 |
| 1N4102 | 8.7 | 250 | 200 | 1.0 | 6.61 | 40 | 0.075 |
| 1N4103 | 9.1 | 250 | 200 | 1.0 | 6.92 | 40 | 0.080 |
| 1N4104 | 10 | 250 | 200 | 1.0 | 7.60 | 40 | 0.080 |
| 1N4105 | 11 | 250 | 200 | .05 | 8.44 | 40 | 0.080 |
| 1N4106 | 12 | 250 | 200 | .05 | 9.12 | 40 | 0.080 |
| 1N4107 | 13 | 250 | 200 | .05 | 9.87 | 40 | 0.080 |
| 1N4108 | 14 | 250 | 200 | .05 | 10.65 | 40 | 0.085 |
| 1N4109 | 15 | 250 | 100 | .05 | 11.40 | 40 | 0.085 |
| 1N4110 | 16 | 250 | 100 | .05 | 12.15 | 40 | 0.085 |
| 1N4111 | 17 | 250 | 100 | .05 | 12.92 | 40 | 0.090 |
| 1N4112 | 18 | 250 | 100 | .05 | 13.67 | 40 | 0.090 |
| 1N4113 | 19 | 250 | 150 | .05 | 14.44 | 40 | 0.090 |
| 1N4114 | 20 | 250 | 150 | .01 | 15.20 | 40 | 0.090 |
| 1N4115 | 22 | 250 | 150 | .01 | 16.72 | 40 | 0.090 |
| 1N4116 | 24 | 250 | 150 | .01 | 18.25 | 40 | 0.090 |
| 1N4117 | 25 | 250 | 150 | .01 | 19.00 | 40 | 0.090 |
| 1N4118 | 27 | 250 | 150 | .01 | 20.45 | 40 | 0.090 |
| 1N4119 | 28 | 250 | 200 | .01 | 21.28 | 40 | 0.095 |
| 1N4120 | 30 | 250 | 200 | .01 | 22.80 | 40 | 0.095 |
| 1N4121 | 33 | 250 | 200 | .01 | 25.08 | 40 | 0.095 |
| 1N4122 | 36 | 250 | 200 | .01 | 27.38 | 40 | 0.095 |
| 1N4123 | 39 | 250 | 200 | .01 | 29.65 | 40 | 0.095 |
| 1N4124 | 43 | 250 | 250 | .01 | 32.65 | 40 | 0.095 |
| 1N4125 | 47 | 250 | 250 | .01 | 35.75 | 40 | 0.095 |
| 1N4126 | 51 | 250 | 300 | .01 | 38.76 | 40 | 0.100 |
| 1N4127 | 56 | 250 | 300 | .01 | 42.60 | 40 | 0.100 |
| 1N4128 | 60 | 250 | 400 | .01 | 45.60 | 40 | 0.100 |
| 1N4129 | 62 | 250 | 500 | .01 | 47.70 | 40 | 0.100 |
| 1N4130 | 68 | 250 | 700 | .01 | 51.68 | 40 | 0.100 |
| 1N4131 | 79 | 250 | 700 | .01 | 57.00 | 40 | 0.100 |
| 1N4132 | 82 | 250 | 800 | .01 | 62.32 | 40 | 0.100 |
| 1N4133 | 87 | 250 | 1000 | .01 | 66.12 | 40 | 0.100 |
| 1N4134 | 91 | 250 | 1200 | .01 | 69.16 | 40 | 0.100 |
| 1N4135 | 100 | 250 | 1500 | .01 | 76.00 | 40 | 0.100 |

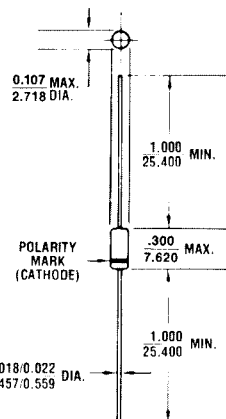


FIGURE 1

All dimensions in INCH
m.m.

MECHANICAL CHARACTERISTICS

CASE: Hermetically sealed glass case. DO-7.

FINISH: All external surfaces are corrosion resistant and leads solderable.

THERMAL RESISTANCE: 300°C/W (Typical) junction to lead at 0.375-inches from body on DO-7.

POLARITY: Diode to be operated with the banded end positive with respect to the opposite end.

WEIGHT: 0.2 grams.

MOUNTING POSITION: Any.

* JEDEC Registered Data.

1N4099 thru 1N4135, 1N4614 thru 1N4627 DO-7

Noise density, (N_D) is specified in microvolts-rms per square-root-hertz. Actual measurement is performed using a 1 KHz to 3 KHz frequency bandpass filter at a constant Zener test current (I_{ZT}) at 25°C ambient temperature. N_D is calculated from the formula.

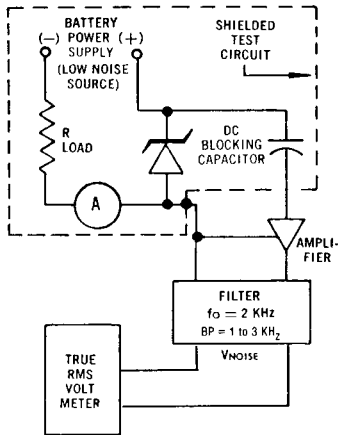


FIGURE 2 NOISE DENSITY MEASUREMENT CIRCUIT

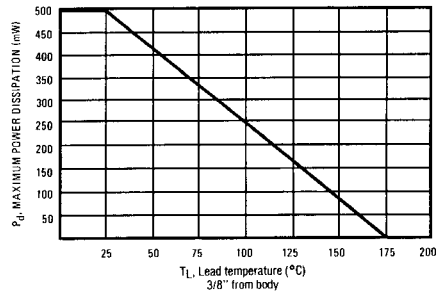


FIGURE 3 POWER DERATING CURVE

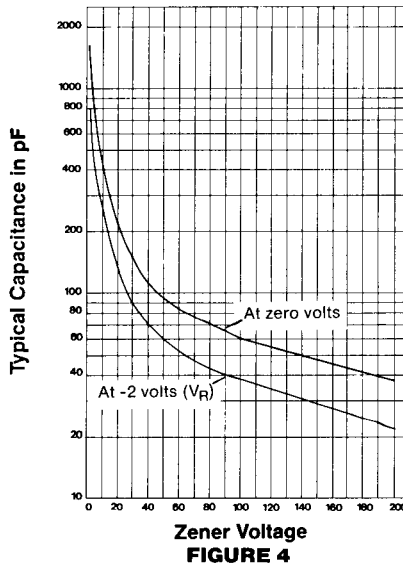


FIGURE 4
CAPACITANCE VS. ZENER VOLTAGE
(TYPICAL)

NOTE 1 The JEDEC type numbers shown with no suffix have a standard tolerance of $\pm 5\%$ on the nominal Zener voltage; suffix C is used to identify $\pm 2\%$; and suffix D is used to identify $\pm 1\%$ tolerance. V_Z is measured with the diode in thermal equilibrium in 25°C still air.

NOTE 2 Zener impedance is derived by superimposing on I_{ZT} , a 60 Hz rms a.c. current equal to 10% of I_{ZT} (25 μA a.c.).

NOTE 3 Based upon 400 mW maximum power dissipation at 25°C ambient temperature, allowance has been made for the higher voltage associated with operation at higher currents.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.