


# 1N5059GP THRU 1N5062GP

## GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 200 to 800 Volts

Forward Current - 1.0 Ampere

**PATENTED \***

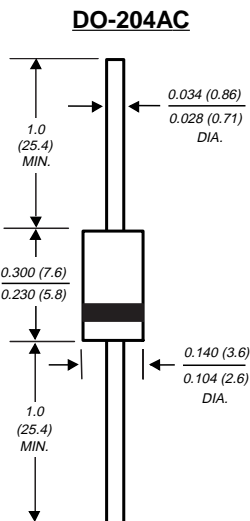

Dimensions in inches and (millimeters)

\* Glass -plastic encapsulation technique is covered by Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306



### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ 1.0 Ampere operation at  $T_A=75^\circ\text{C}$  with no thermal runaway
- ◆ Typical  $I_R$  less than  $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed:  $350^\circ\text{C}/10$  seconds,  $0.375"$  (9.5mm) lead length at 5 lbs., (2.3kg) tension



### MECHANICAL DATA

**Case:** JEDEC DO-204AC molded plastic over glass body  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.015 ounce, 0.4 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

	SYMBOLS	1N5059GP	1N5060GP	1N5061GP	1N5062GP	UNITS
* Maximum repetitive peak reverse voltage	$V_{RRM}$	200	400	600	800	Volts
Maximum RMS voltage	$V_{RMS}$	140	280	420	560	Volts
* Maximum DC blocking voltage	$V_{DC}$	200	400	600	800	Volts
* Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=75^\circ\text{C}$	$I_{(AV)}$	1.0				Amp
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	50.0				Amps
* Maximum instantaneous forward voltage at 1.0A, $T_A=75^\circ\text{C}$	$V_F$	1.2				Volts
* Maximum full load reverse current, full cycle average 0.375" (9.5mm) lead length at $T_A=25^\circ\text{C}$ $T_A=75^\circ\text{C}$	$I_{R(AV)}$	5.0 150.0				$\mu\text{A}$
* Maximum DC reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=175^\circ\text{C}$	$I_R$	5.0 300.0				$\mu\text{A}$
Typical reverse recovery time (NOTE 1)	$t_{rr}$	2.0				$\mu\text{s}$
Typical junction capacitance (NOTE 2)	$C_J$	15.0				pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$ $R_{\theta JL}$	45.0 20.0				$^\circ\text{C/W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +175				$^\circ\text{C}$

**NOTES:**

- (1) Reverse recovery test conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$
  - (2) Measured at 1.0 MHz and applied reverse voltage of 4.0  $V_{DC}$
  - (3) Thermal resistance from junction to ambient and from junction to lead at 0.375" (9.5mm) lead length, P.C.B. mounted
- \* JEDEC registered value

# RATINGS AND CHARACTERISTIC CURVES 1N5059GP THRU 1N5062GP

FIG. 1 - FORWARD CURRENT DERATING CURVE

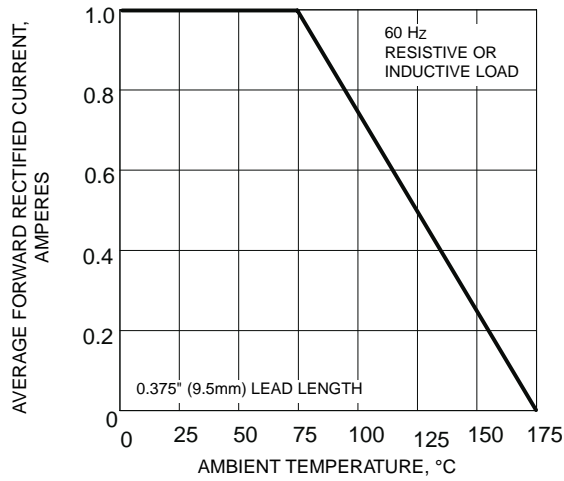


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

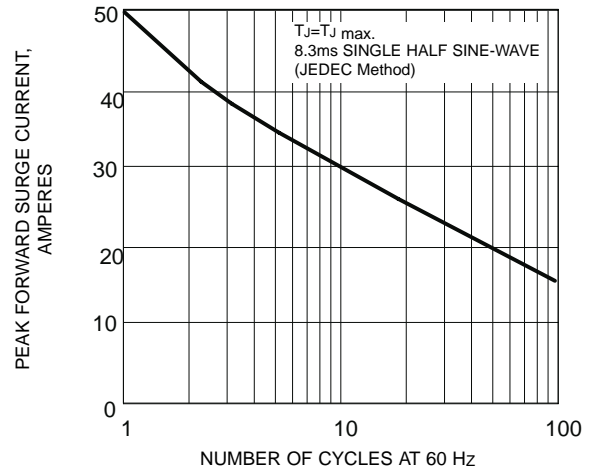


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

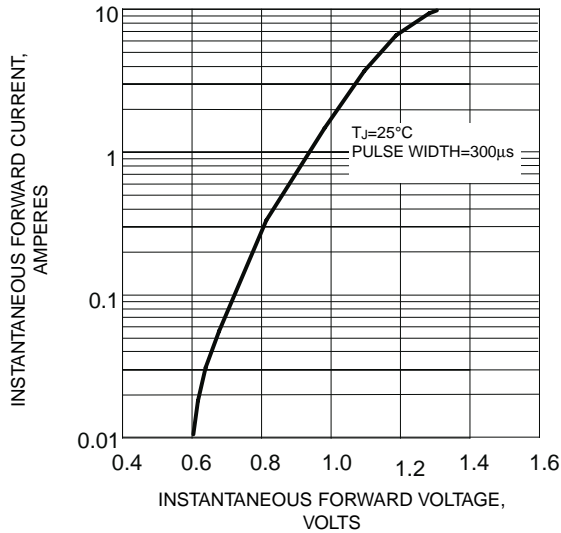


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

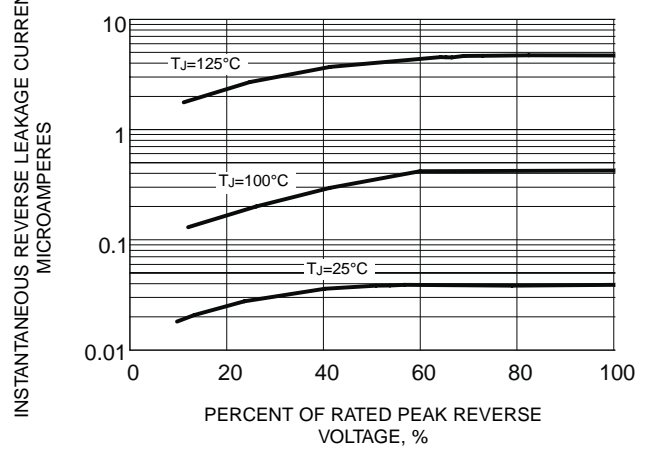


FIG. 5 - TYPICAL JUNCTION CAPACITANCE


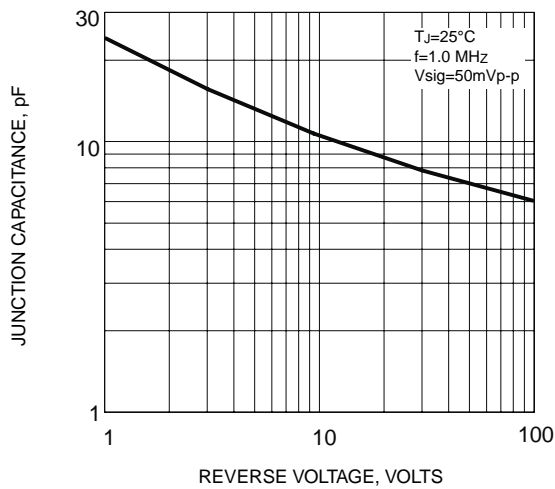


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE



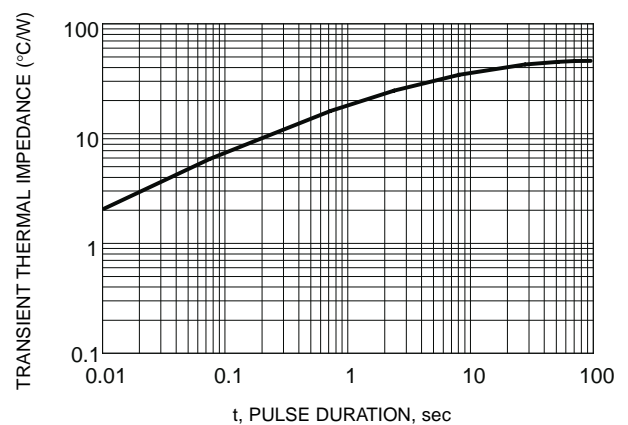

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.