


# 1N5624GP THRU 1N5627GP

## GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 200 to 800 Volts    Forward Current - 3.0 Amperes

**PATENTED \***

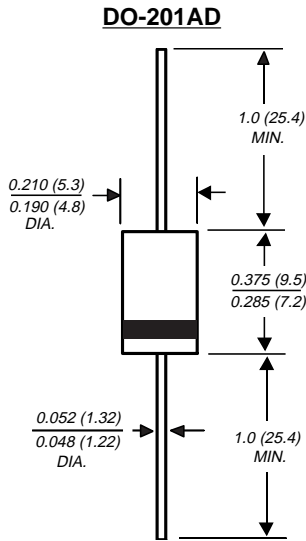

Dimensions in inches and (millimeters)

\* Glass-plastic encapsulation technique is covered by Patent No. 3,996,602 and brazed-lead assembly by Patent No. 3,930,306

**SUPERRECTIFIER®**

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ 3.0 Ampere operation at  $T_A=70^\circ\text{C}$  with no thermal runaway
- ◆ Typical  $I_R$  less than  $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed:  $350^\circ\text{C}/10$  seconds,  $0.375"$  (9.5mm) lead length 5 lbs. (2.3kg) tension



### MECHANICAL DATA

**Case:** JEDEC DO-201AD molded plastic over glass body  
**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026  
**Polarity:** Color band denotes cathode end  
**Mounting Position:** Any  
**Weight:** 0.04 ounce, 1.12 grams

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at  $25^\circ\text{C}$  ambient temperature unless otherwise specified.

	SYMBOLS	1N5624GP	1N5625GP	1N5626GP	1N5627GP	UNITS
* Maximum repetitive peak reverse voltage	$V_{RRM}$	200	400	600	800	Volts
* Maximum DC blocking voltage	$V_{DC}$	200	400	600	800	Volts
* Maximum average forward rectified current 0.375" (9.5mm) lead lengths at $T_A=70^\circ\text{C}$	$I_{(AV)}$	3.0				Amps
* Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	125.0				Amps
* Maximum instantaneous forward voltage at 3.0A $T_A=25^\circ\text{C}$ $T_A=70^\circ\text{C}$	$V_F$	1.0 0.95				Volts
Maximum reverse current at rated DC blocking voltage $T_A=25^\circ\text{C}$ $T_A=150^\circ\text{C}$	$I_R$	300.0		200.0		$\mu\text{A}$
Maximum full load reverse current, full cycle average, 0.375" (9.5mm) lead length at $T_A=70^\circ\text{C}$	$I_{R(AV)}$	200.0				$\mu\text{A}$
Typical reverse recovery time (NOTE 1)	$t_{rr}$	3.0				$\mu\text{s}$
Typical junction capacitance (NOTE 2)	$C_J$	40.0				pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	20.0				$^\circ\text{C}/\text{W}$
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +175				$^\circ\text{C}$

#### NOTES:

- (1) Reverse recovery test conditions:  $I_F=0.5\text{A}$ ,  $I_R=1.0\text{A}$ ,  $I_{rr}=0.25\text{A}$
  - (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 VDC
  - (3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted
- \*JEDEC Values

# RATINGS AND CHARACTERISTIC CURVES 1N5624GP THRU 1N5627GP

FIG. 1 - FORWARD CURRENT DERATING CURVE

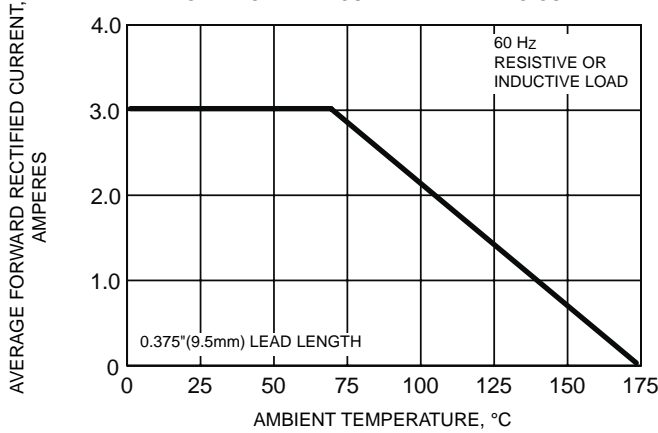


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

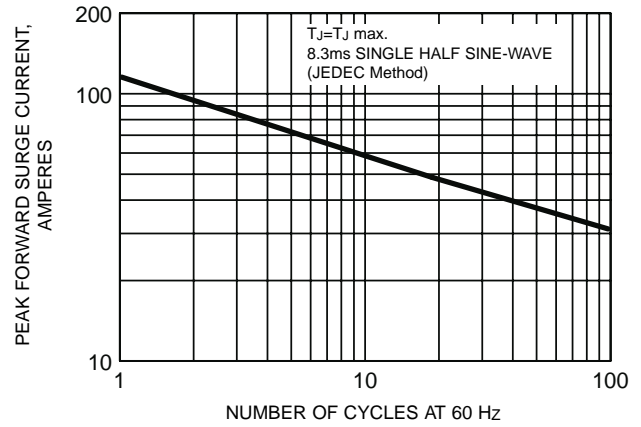


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

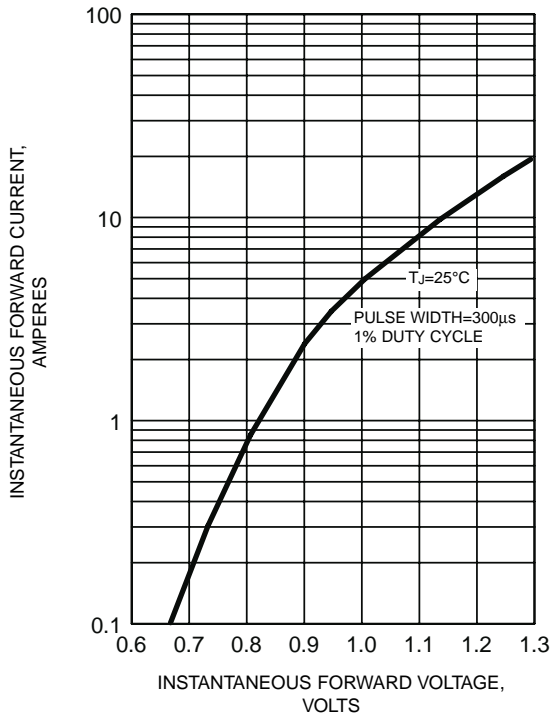


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS


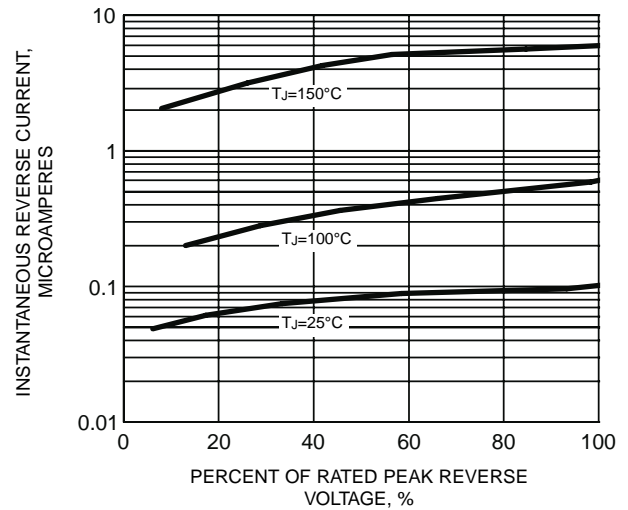


FIG. 5 - TYPICAL JUNCTION CAPACITANCE



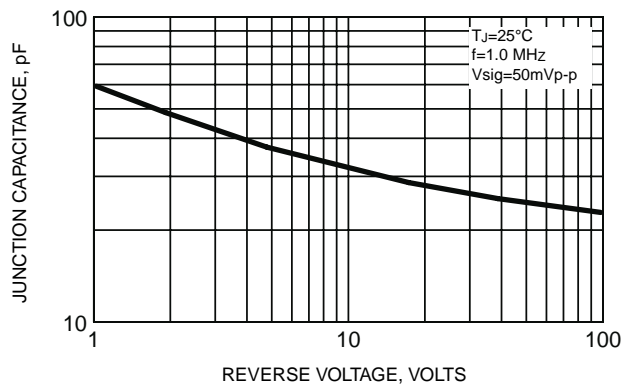

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.