

9097250 TOSHIBA (DISCRETE/OPTO)

67C 09355 D

T-07-19

1SV100

Silicon Epitaxial Planar Type

Variable Capacitance Diode


AM RADIO BAND TUNING APPLICATIONS.

FEATURES:

- High Capacitance Ratio : $C_{1V}/C_{9V}=17(\text{Min.})$
- High Q : $Q=450(\text{Typ.})$
- Small Package
- Low Voltage Operation : 1V-9V

MAXIMUM RATINGS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	RATING	UNIT
Reverse Voltage	V_R	15	V
Junction Temperature	T_j	125	$^\circ\text{C}$
Storage Temperature Range	T_{stg}	-55 ~ 125	$^\circ\text{C}$

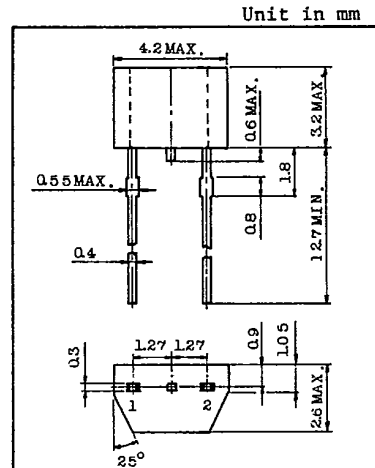

1 ANODE
2 CATHODE

JEDEC

EIAJ

TOSHIBA

1-4 E1A

Weight : 0.09g

ELECTRICAL CHARACTERISTICS ($T_a=25^\circ\text{C}$)

CHARACTERISTIC	SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Reverse Voltage	V_R	$I_R=10\mu\text{A}$	15	-	-	V
Reverse Current	I_R	$V_R=15\text{V}$	-	-	50	nA
Capacitance	C_{1V}	$V_R=1\text{V}, f=1\text{MHz}$	450	-	600	pF
Capacitance	C_{9V}	$V_R=9\text{V}, f=1\text{MHz}$	-	-	35	pF
Capacitance Ratio	C_{1V}/C_{9V}	-	17	-	-	
Figure of Merit	Q	$V_R=1\text{V}, f=1\text{MHz}$	200	450	-	

Note : Available in matched group for capacitance to 3%.

$$\frac{C(\text{Max.}) - C(\text{Min.})}{C(\text{Min.})} \leq 0.03 \quad (V_R=1\text{V}-9\text{V})$$

and capacitance is classified as Table 1.

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

67C 09356

DT-07-19

1SV100

Table 1 : Capacitance Data

TEST CONDITION : f=1MHz, Ta=25°C

Unit : pF

No.	C1V	C3V	C5V	C9V
1	452.3~465.8	176.1~181.3	68.43~70.48	20.06~20.66
2	463.5~477.4	180.4~185.8	80.14~72.24	20.57~21.18
3	475.2~489.4	184.9~190.4	71.90~74.05	21.08~21.71
4	487.0~501.6	189.6~195.2	73.70~75.91	21.61~22.25
5	499.2~514.1	194.3~200.1	75.55~77.81	22.14~22.80
6	511.6~526.9	199.2~205.1	77.43~79.75	22.69~23.37
7	524.4~540.1	204.2~210.3	79.36~81.74	23.27~23.96
8	537.5~553.6	209.3~215.5	81.35~83.79	23.85~24.55
9	550.9~567.4	214.5~220.9	83.38~85.88	24.44~25.17
10	564.7~581.6	219.9~226.4	85.47~88.03	25.05~25.80
11	578.9~596.2	225.4~232.1	87.60~90.22	25.68~26.45
12		231.0~237.9	89.79~92.48	26.32~27.10
13		236.7~243.8	92.04~94.80	26.98~27.78
14		242.6~249.8	94.34~97.17	27.66~28.48
15		248.7~256.1	96.70~99.60	28.34~29.19
16		254.9~262.5	99.11~102.08	29.05~29.92
17		261.2~269.0	101.59~104.63	29.78~30.67
18		267.7~275.7	104.13~107.25	30.53~31.44
19		274.4~282.6	106.73~109.93	31.29~32.22
20		281.3~289.7	109.40~112.68	
21		288.3~296.9	112.13~115.49	
22		295.5~304.3	114.93~118.37	
23		302.9~311.9	117.80~121.33	
24		310.4~319.7	120.75~124.37	
25		318.2~327.7	123.77~127.48	
26		326.3~336.0	126.86~130.66	
27		334.4~344.4	130.03~133.93	
28		342.8~353.0	133.29~137.28	
29			136.62~140.71	
30			140.04~144.24	
31			143.53~147.83	
32			147.09~151.50	






- (1) This table is not selection guide, which means only to show the data.
- (2) The number on the vinyl package (on the label in the vinyl package) is to show the capacitance data at each voltage in a matched group.
- Example 4 - 3 - 2 - 1
 (C1V) (C3V) (C5V) (C9V)
- (3) The absolute capacitance value is in $\pm 0.5\%$.

TOSHIBA CORPORATION

9097250 TOSHIBA (DISCRETE/OPTO)

67C 09357 D T-07-19

1SV100

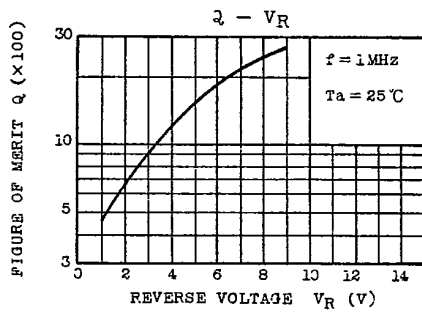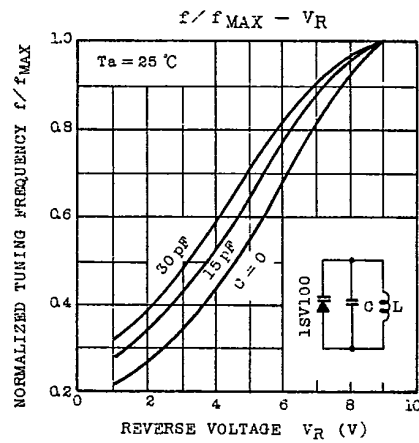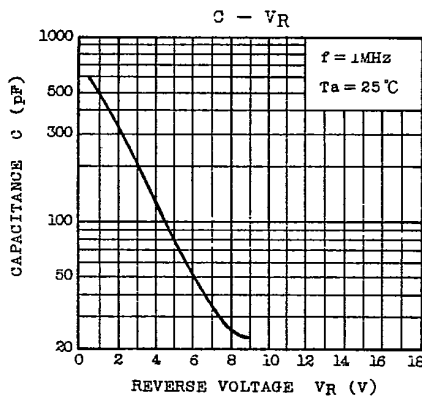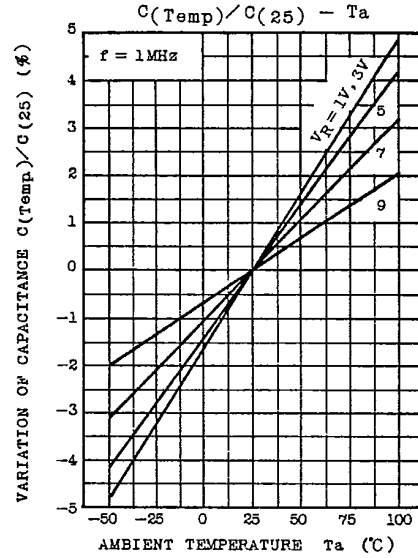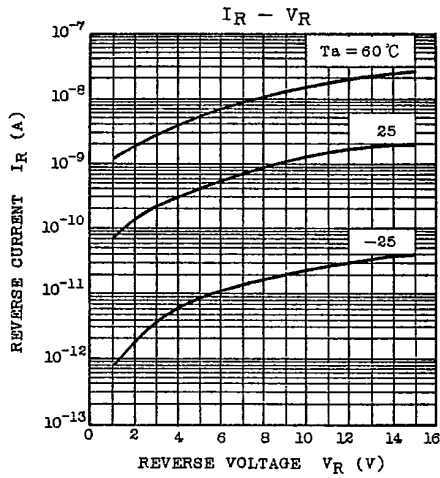

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.