



20TQ...  
20TQ...S

SCHOTTKY RECTIFIER

20 Amp

$I_{F(AV)} = 19\text{Amp}$   
 $V_R = 35 \text{ to } 45\text{V}$

**Major Ratings and Characteristics**



Characteristics	20TQ	Units
$I_{F(AV)}$ Rectangular waveform	20	A
$V_{RRM}$ range	35 to 45	V
$I_{FSM}$ @tp = 5 $\mu$ s sine	1800	A
$V_F$ @20 Apk, $T_J = 125^\circ\text{C}$	0.51	V
$T_J$ range	-55 to 150	$^\circ\text{C}$

**Description/ Features**

The 20TQ Schottky rectifier series has been optimized for very low forward voltage drop, with moderate leakage. The proprietary barrier technology allows for reliable operation up to 150° C junction temperature. Typical applications are in switching power supplies, converters, free-wheeling diodes, and reverse battery protection.

- 150° C  $T_J$  operation
- High purity, high temperature epoxy encapsulation for enhanced mechanical strength and moisture resistance
- Low forward voltage drop
- High frequency operation
- Guard ring for enhanced ruggedness and long term reliability

**Case Styles**

<p>20TQ...</p>  <div style="display: flex; justify-content: center; align-items: center; margin-top: 10px;"> <div style="text-align: center;"> <p>Base Cathode</p> <p>○ 2</p> </div> <div style="margin: 0 10px;"> <p>○ 1</p> <p>Cathode</p> </div> <div style="margin: 0 10px;"> <p>○ 3</p> <p>Anode</p> </div> </div> <p>TO-220AC</p>	<p>20TQ... S</p>  <div style="display: flex; justify-content: center; align-items: center; margin-top: 10px;"> <div style="text-align: center;"> <p>Base Cathode</p> <p>○ 2</p> </div> <div style="margin: 0 10px;"> <p>○ 1</p> <p>N/C</p> </div> <div style="margin: 0 10px;"> <p>○ 3</p> <p>Anode</p> </div> </div> <p>D<sup>2</sup>PAK</p>
--	---

## 20TQ... Series

Bulletin PD-20241 rev. B 12/01

International  
**IR** Rectifier

### Voltage Ratings

Part number	20TQ035	20TQ040	20TQ045
$V_R$ Max. DC Reverse Voltage (V)	35	40	45
$V_{RWM}$ Max. Working Peak Reverse Voltage (V)			

### Absolute Maximum Ratings

Parameters	20TQ	Units	Conditions
$I_{F(AV)}$ Max. Average Forward Current * See Fig. 5	20	A	50% duty cycle @ $T_C = 116^\circ\text{C}$ , rectangular wave form
$I_{FSM}$ Max. Peak One Cycle Non-Repetitive Surge Current * See Fig. 7	1800	A	5 $\mu\text{s}$ Sine or 3 $\mu\text{s}$ Rect. pulse
	400		10ms Sine or 6ms Rect. pulse
$E_{AS}$ Non-Repetitive Avalanche Energy	27	mJ	$T_J = 25^\circ\text{C}$ , $I_{AS} = 4$ Amps, $L = 3.4$ mH
$I_{AR}$ Repetitive Avalanche Current	4	A	Current decaying linearly to zero in 1 $\mu\text{sec}$ Frequency limited by $T_J$ max. $V_A = 1.5 \times V_R$ typical

### Electrical Specifications

Parameters	20TQ	Units	Conditions
$V_{FM}$ Max. Forward Voltage Drop (1) * See Fig. 1	0.57	V	@ 20A
	0.73	V	@ 40A
	0.51	V	@ 20A
	0.67	V	@ 40A
$I_{RM}$ Max. Reverse Leakage Current (1) * See Fig. 2	2.7	mA	$T_J = 25^\circ\text{C}$
	105	mA	$T_J = 125^\circ\text{C}$
$C_T$ Max. Junction Capacitance	1400	pF	$V_R = 5V_{DC}$ , (test signal range 100Khz to 1Mhz) $25^\circ\text{C}$
$L_S$ Typical Series Inductance	8.0	nH	Measured lead to lead 5mm from package body
$dv/dt$ Max. Voltage Rate of Change (Rated $V_R$ )	10000	V/ $\mu\text{s}$	

(1) Pulse Width < 300 $\mu\text{s}$ , Duty Cycle < 2%

### Thermal-Mechanical Specifications

Parameters	20TQ	Units	Conditions
$T_J$ Max. Junction Temperature Range	-55 to 150	$^\circ\text{C}$	
$T_{stg}$ Max. Storage Temperature Range	-55 to 150	$^\circ\text{C}$	
$R_{thJC}$ Max. Thermal Resistance Junction to Case	1.50	$^\circ\text{C/W}$	DC operation * See Fig. 4
$R_{thCS}$ Typical Thermal Resistance, Case to Heatsink	0.50	$^\circ\text{C/W}$	Mounting surface, smooth and greased
wt Approximate Weight	2 (0.07)	g (oz.)	
T Mounting Torque	Min.	6 (5)	Kg-cm (lbf-in)
	Max.	12 (10)	

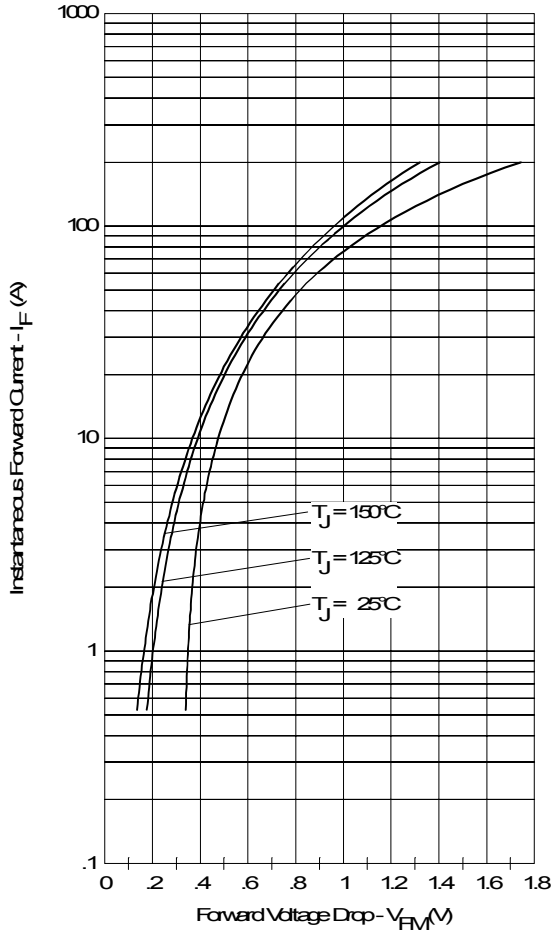


Fig. 1 - Maximum Forward Voltage Drop Characteristics

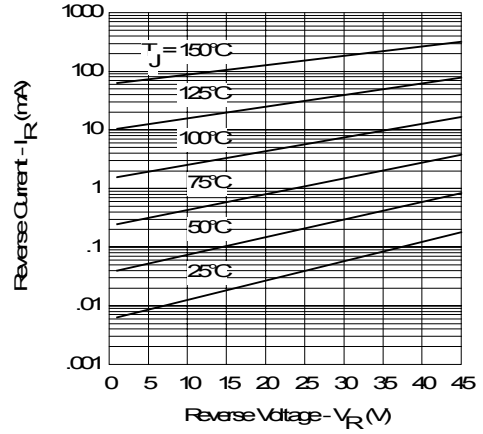


Fig. 2 - Typical Values of Reverse Current Vs. Reverse Voltage

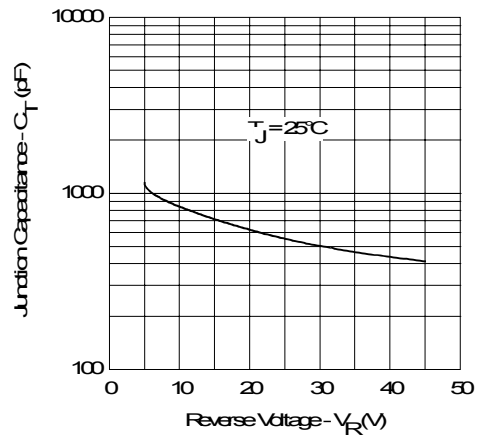


Fig. 3 - Typical Junction Capacitance Vs. Reverse Voltage

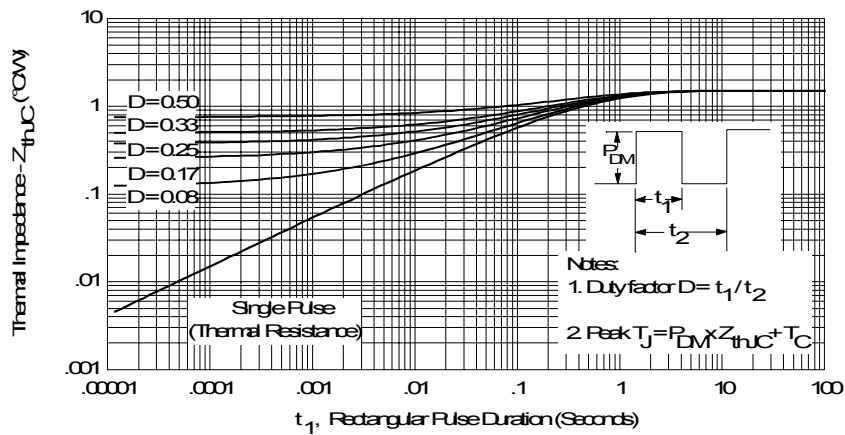


Fig. 4 - Maximum Thermal Impedance  $Z_{thJC}$  Characteristics

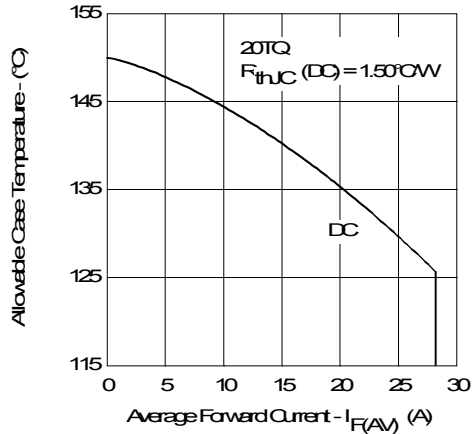


Fig. 5 - Maximum Allowable Case Temperature Vs. Average Forward Current

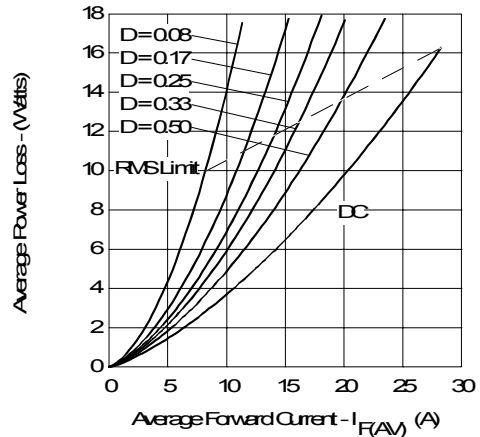


Fig. 6 - Forward Power Loss Characteristics

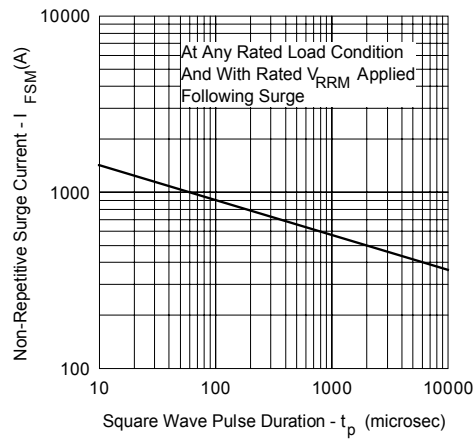


Fig. 7 - Maximum Non-Repetitive Surge Current




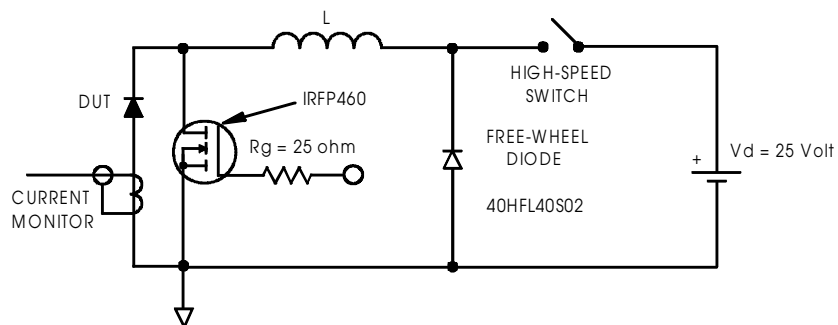


Fig. 8 - Unclamped Inductive Test Circuit


Outline Table

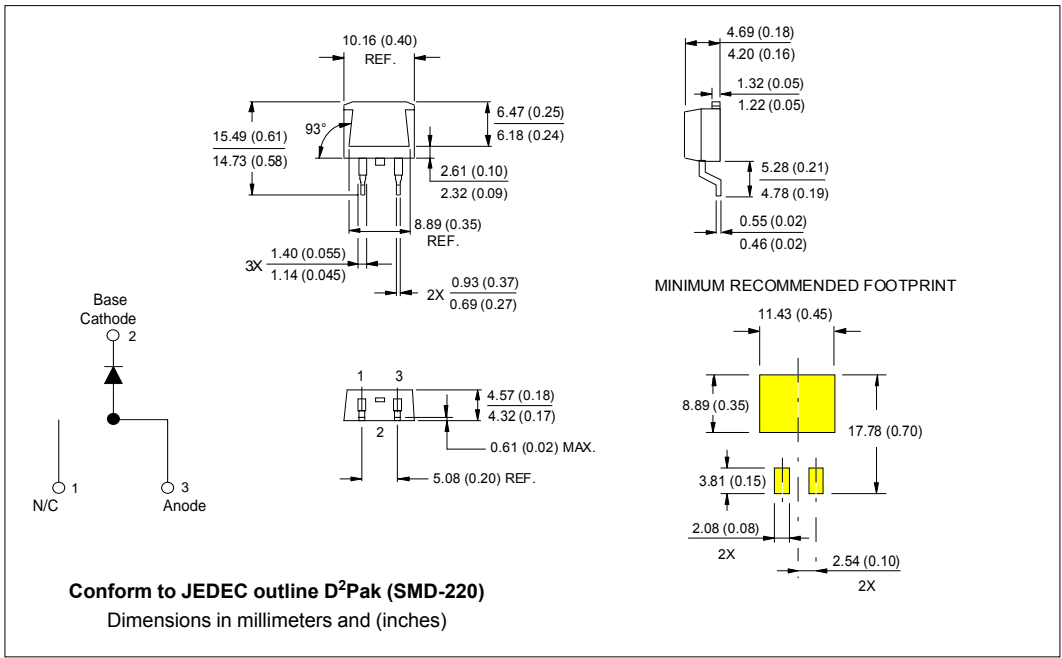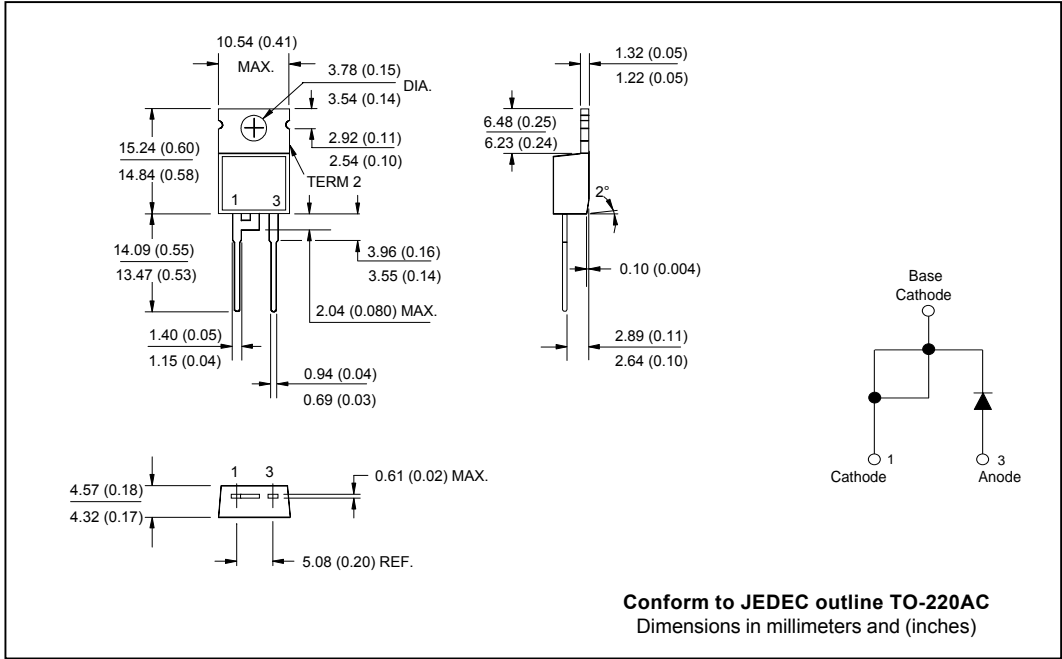

Marking Information

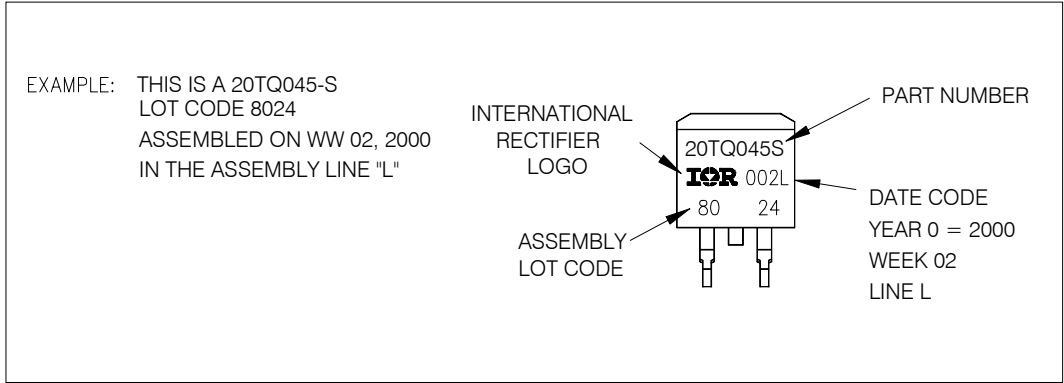

Tape & Reel Information

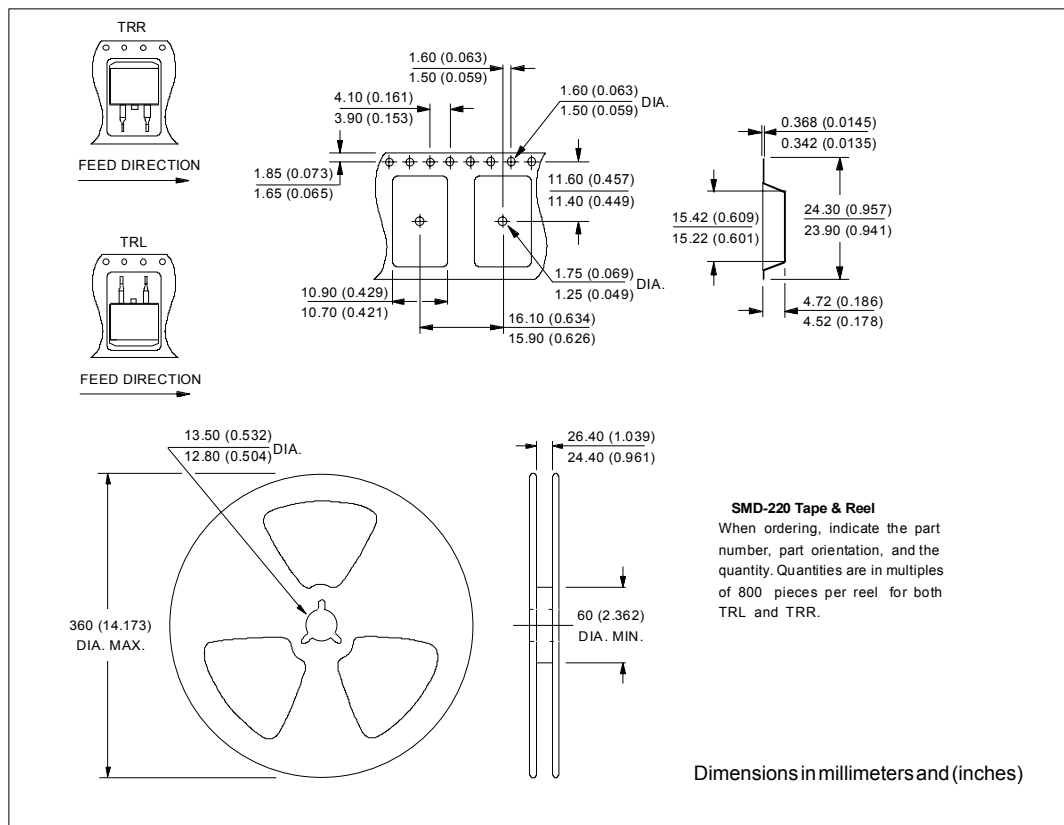

Ordering Information Table

**Device Code**

<b>20</b>	<b>T</b>	<b>Q</b>	<b>045</b>	<b>S</b>
①	②	③	④	⑤

<b>1</b>	- Essential Part Number	
<b>2</b>	- T = TO-220	
<b>3</b>	- Q = Schottky Q Series	
<b>4</b>	- Voltage Rating	035 = 35V
<b>5</b>	- S = D <sup>2</sup> Pak	040 = 40V
		045 = 45V

Data and specifications subject to change without notice.  
 This product has been designed and qualified for Industrial Level.  
 Qualification Standards can be found on IR's Web site.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.