


240 Amp Schottky Rectifier HS24515

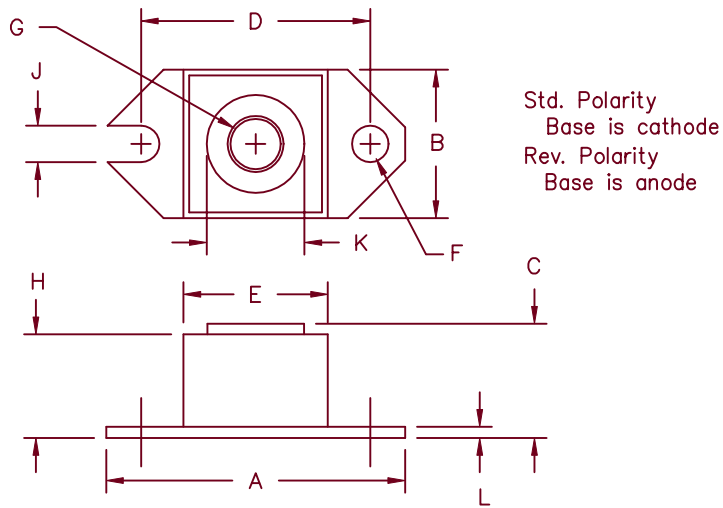

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	1.52	1.56	38.86	39.62	
B	.725	.775	18.42	19.69	
C	.605	.625	15.37	15.88	
D	1.177	1.197	29.90	30.41	
E	.745	.755	18.92	19.18	Sq.
F	.152	.162	3.86	4.11	Dia.
G		1/4-20	UNC-2B		
H	.540	.580	13.72	14.73	
J	.152	.162	3.86	4.11	
K	.495	.505	12.57	12.83	Dia.
L	.120	.130	3.05	3.30	

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
HS24515*	245NQ015	15V	15V

*Add Suffix R for Reverse Polarity

- Schottky Barrier Rectifier
- 0.28V Vf@240A, 100°C
- Optimized for OR'ing applications
- Guard Ring Reverse Protection
- 125°C Operation (Vr<5V)

Electrical Characteristics

Average forward current	I _{F(AV)} 240 Amps	T _C = 78°C, V _r = 5V
Average forward current	I _{F(AV)} 240 Amps	T _C = 69°C, V _r = 15V
Maximum surge current	I _{FSM} 3500 Amps	8.3ms, half sine, T _J = 125°C
Maximum repetitive reverse current	I _{R(OV)} 2 Amps	f = 1 KHZ, 25°C, 1us square wave
Max peak forward voltage	V _{FM} 0.35 Volts	I _{FM} = 240A: T _J = 25°C*
Max peak forward voltage	V _{FM} 0.28 Volts	I _{FM} = 240A: T _J = 100°C*
Max peak reverse current	I _{RM} 4000 mA	V _R = 5V, T _J = 100°C*
Max peak reverse current	I _{RM} 6500 mA	V _{RRM} , T _J = 100°C*
Max peak reverse current	I _{RM} 75mA	V _R = 5V, T _J = 25°C
Max peak reverse current	I _{RM} 150mA	V _{RRM} , T _J = 25°C
Typical junction capacitance	C _J 21,700pF	V _R = 5.0V, T _C = 25°C

*Pulse test: Pulse width 300 usec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T _{STG}	-55°C to 150°C
Operating junction temp range	T _J	-55°C to 125°C
Max thermal resistance	R _{ΘJC}	0.24°C/W Junction to case
Typical thermal resistance (greased)	R _{ΘCS}	0.12°C/W Case to sink
Terminal Torque		35-40 inch pounds
Mounting Base Torque		20-25 inch pounds
Weight		1.1 ounces (32 grams) typical

HS24515

Figure 1
Typical Forward Characteristics

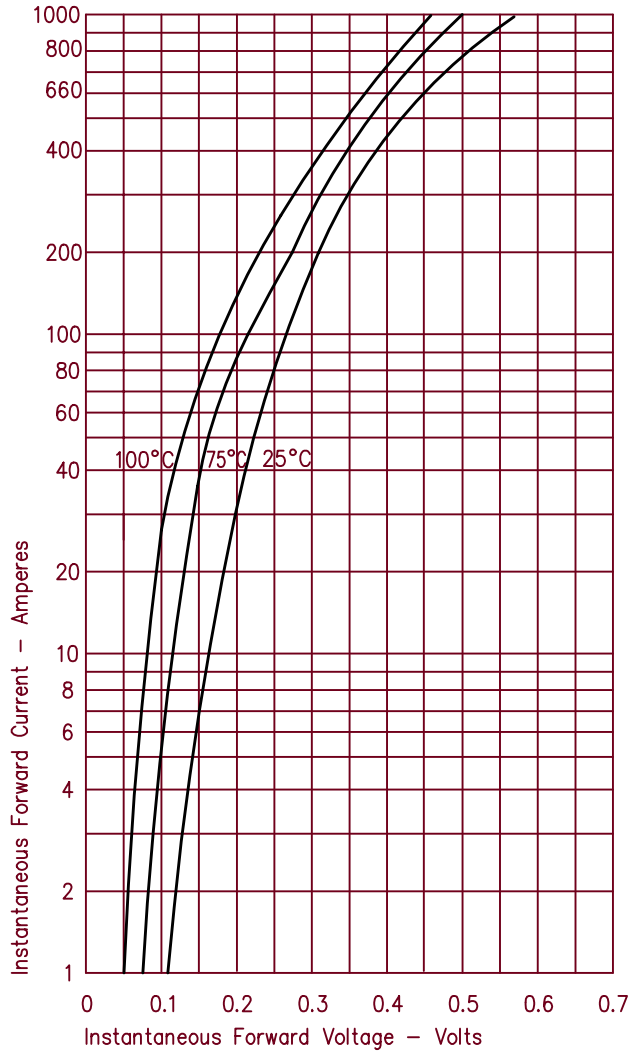


Figure 3
Typical Junction Capacitance

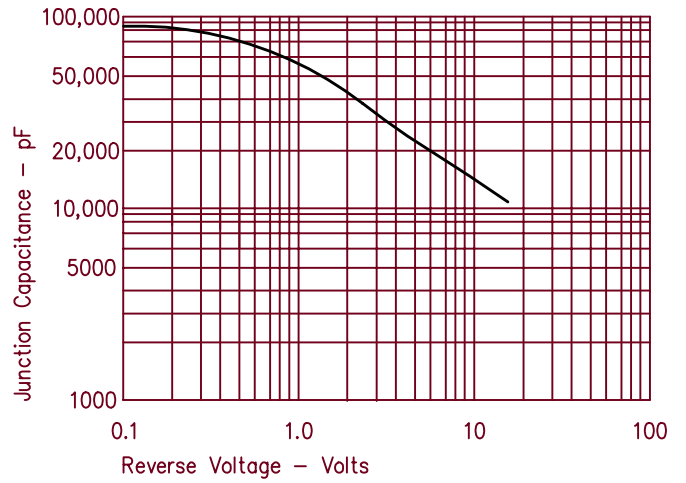


Figure 4
Forward Current Derating

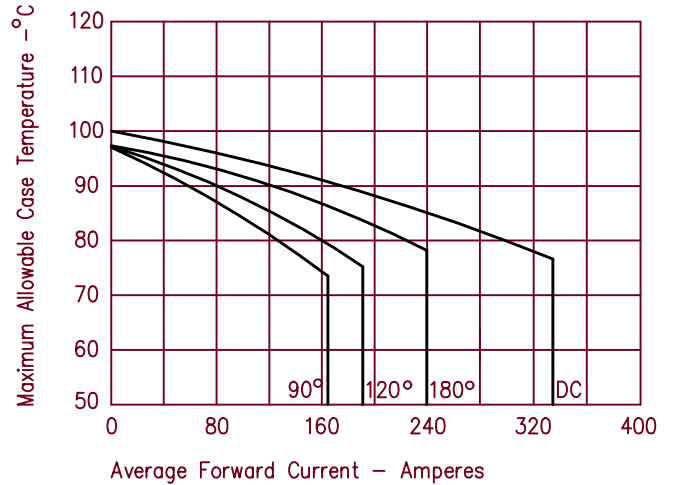


Figure 2
Typical Reverse Characteristics


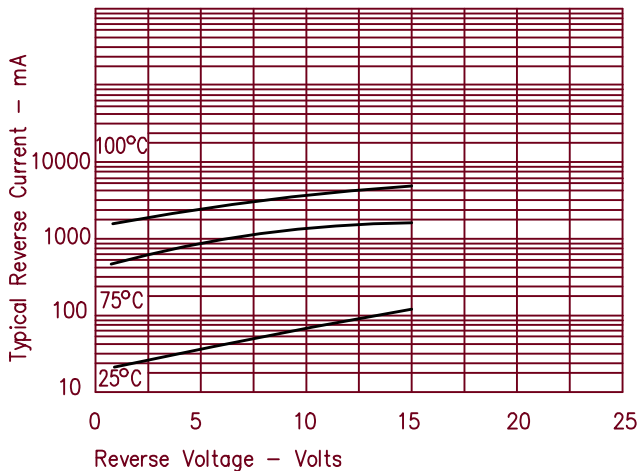


Figure 5
Maximum Forward Power Dissipation



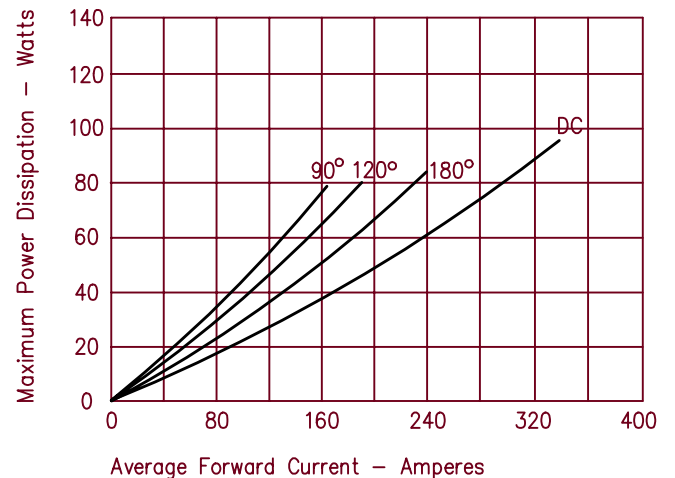

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.