

TENTATIVE

Features and Applications

- Low ON-state resistance.
- Very high-speed switching.
- Low-voltage drive.
- Micaless package facilitating easy mounting.


Absolute Maximum Ratings / Ta=25°C

			unit
Drain to Source Voltage	VDSS	-200	V
Gate to Source Voltage	VGSS	±20	V
Drain Current (D.C)	ID	-12	A
Drain Current (Pulse)	IDP	PW≤10μS, dutycycle≤1%	-48 A
Allowable power Dissipation	PD	Tc=25°C	40 W
Channel Temperature	Tch		150 °C
Storage Temperature	Tstg		-55 to +150 °C


Electrical Characteristics / Ta=25°C

			min	typ	max	unit
Drain to Source Breakdown Voltage	V(BR)DSS	ID=-1mA, VGS=0	-200			V
Gate to Source Breakdown Voltage	V(BR)GSS	ID=±100μA, VGS=0	±20			V
Zero Gate Voltage Drain Current	IDSS	VDS=-200V, VGS=0			-100	μA
Gate to Source Leakage Current	IGSS	VGS=±16V, VDS=0			±10	μA
Cutoff Voltage	VGS(OFF)	VDS=-10V, ID=-1mA	-1.5		-2.5	V
Forward Transfer Admittance	yfs	VDS=-10V, ID=-6A	6.3	10.5		S
Static Drain to Source on State Resistance	RDS(On)1	ID=-5A, VGS=-4V		170	230	mΩ
Input Capacitance	Ciss	VDS=-20V, f=1MHz		2400		pF
Output Capacitance	Coss	VDS=-20V, f=1MHz		540		pF
Reverse Transfer Capacitance	Crss	VDS=-20V, f=1MHz		260		pF
Turn-ON Delay Time	td(On)	See Specified Test Circuit .		40		ns
Rise Time	tr			120		ns
Turn-off Delay Time	td(Off)			720		ns
Fall Time	tf			310		ns
Diode Forward Voltage	VSD	IS=-1.0A, VGS=0	-1.0		-1.5	V


Switching Time Test Circuit

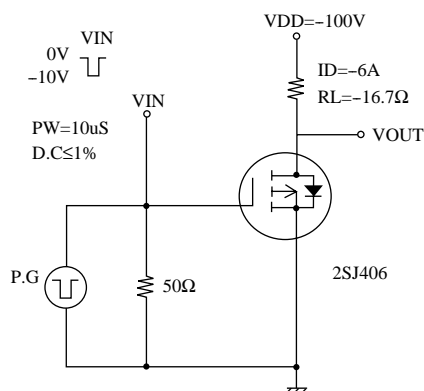

Electrical Connection



Case Outline TO-220 (unit:mm)

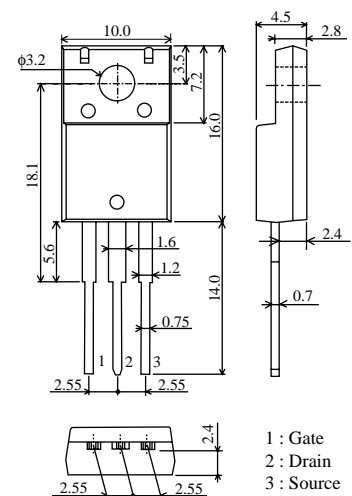

Specifications and information herein are subject to change without notice.

SANYO Electric Co., Ltd. Semiconductor Company

TOKYO OFFICE Tokyo Bldg., 1-10,1 Chome, Ueno, taito-ku, 110 JAPAN

990929TM2fXHD



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.