


B40C800DM THRU B380C800DM

MINIATURE GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

Reverse Voltage - 65 to 600 Volts Forward Current - 0.9 Ampere

Case Style DFM

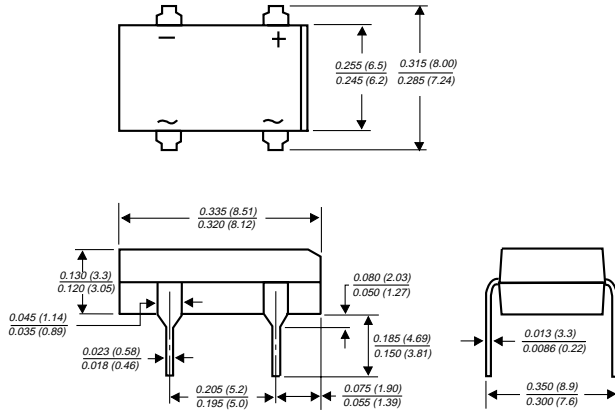

Dimensions in inches and (millimeters)

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ Glass passivated chip junctions
- ◆ Surge overload rating of 45 Amperes peak
- ◆ Ideal for printed circuit boards
- ◆ High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: Molded plastic body over passivated junctions
Terminals: Plated leads solderable per MIL-STD-750, Method 2026
Polarity: Polarity symbols marked on body
Mounting Position: Any
Weight: 0.04 ounce, 1.0 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

	SYMBOLS	B40 C800DM	B80 C800DM	B125 C800DM	B250 C800DM	B380 C800DM	UNITS
Maximum repetitive peak reverse voltage	V _{RRM}	65	125	200	400	600	Volts
Maximum RMS input voltage R + C-load	V _{RMS}	40	80	125	250	380	Volts
Maximum average forward output current for free air operation at T _A =45°C R + L-load C-load	I _(AV)	0.9 0.8					Amp
Maximum DC blocking voltage	V _{DC}	65	125	200	400	600	Volts
Maximum peak working voltage	V _{RWM}	90	180	300	600	900	Volts
Maximum non-repetitive peak voltage	V _{RSM}	100	200	350	650	1000	Volts
Maximum repetitive peak forward surge current	I _{FRM}	10.0					Amps
Peak forward surge current single sine wave on rated load at T _J =125°C	I _{FSM}	45.0					Amps
Rating for fusing at T _J =125°C (t<100ms)	I ² t	10.0					A ² sec
Minimum series resistor C-load at V _{RMS} = ±10%	R _T	1.0	2.0	4.0	8.0	12.0	Ohms
Maximum load capacitance +50% -10%	C _L	5000	2500	1000	500	200	μF
Maximum instantaneous forward voltage drop per leg at 0.9A	V _F	1.0					Volts
Maximum reverse current at rated repetitive peak voltage per leg	I _R	10.0					μA
Typical thermal resistance per leg (NOTE 1) R _{θJA} R _{θJL}		40.0 15.0					°C/W
Operating junction temperature range	T _J	-40 to +125					°C
Storage temperature range	T _{STG}	-40 to +150					°C

NOTES: (1) Thermal resistance from junction to ambient and from junction to lead P.C.B. mounted on 0.5 x 0.5" (13 x 13mm) copper pads

RATINGS AND CHARACTERISTICS CURVES B40C800DM THRU B380C800DM

FIG. 1 - DERATING CURVE OUTPUT RECTIFIED CURRENT FOR B40C800DM...B125C800DM

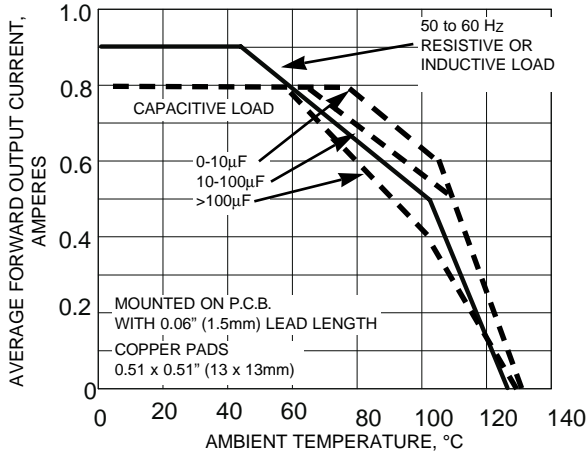


FIG. 2 - DERATING CURVE OUTPUT RECTIFIED CURRENT FOR B250C800DM...B380C800DM

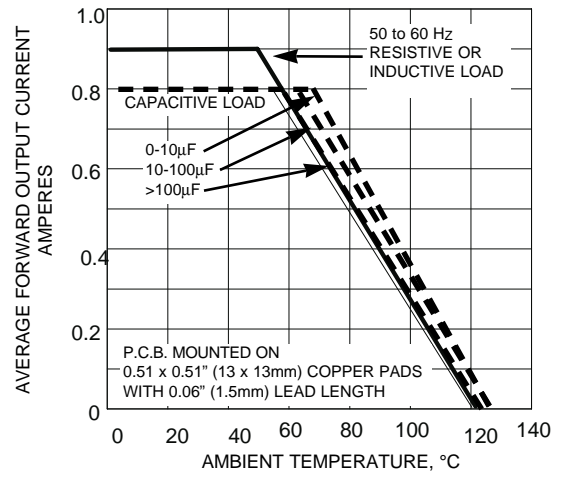


FIG. 3 - MAXIMUM NON-REPETITIVE PEAK FORWARD CURRENT PER LEG

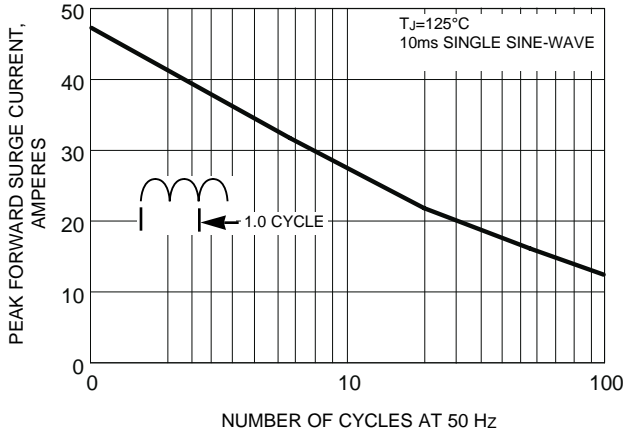


FIG. 4 - TYPICAL FORWARD CHARACTERISTICS PER LEG

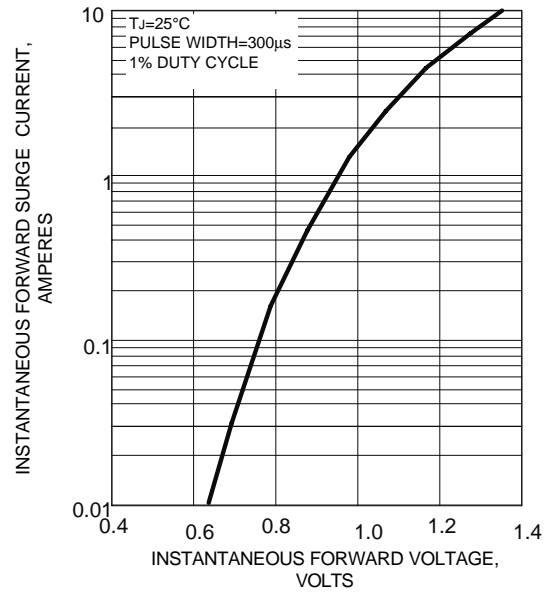


FIG. 5 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG


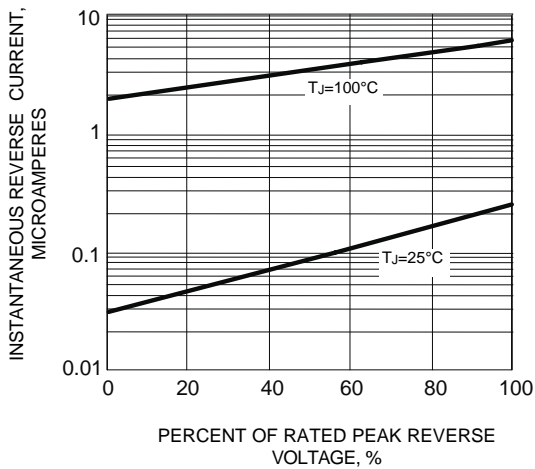


FIG. 6 - TYPICAL JUNCTION CAPACITANCE PER LEG



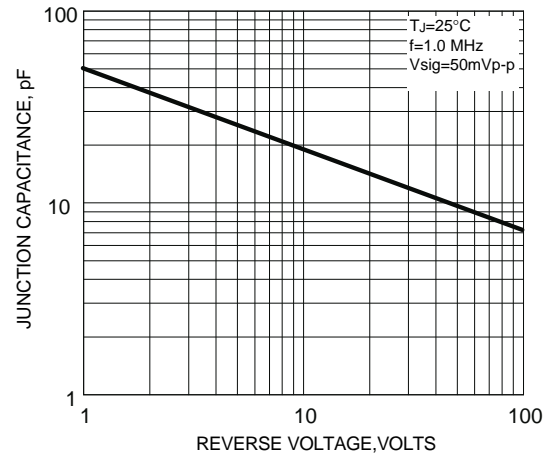

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.