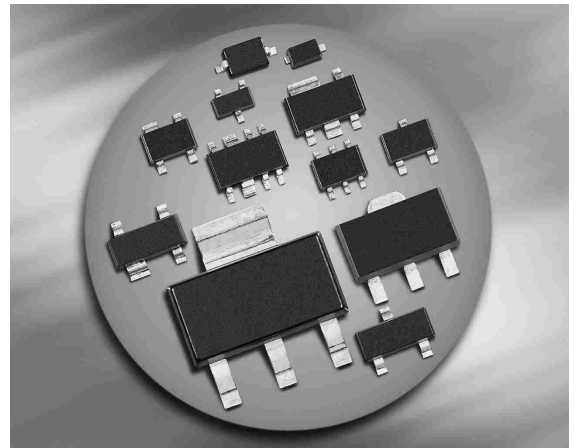




Silicon RF Switching Diode

- Low-loss VHF / UHF switch above 10 MHz
- PIN diode with low forward resistance


BAT18-04
BAT18-05


Type	Package	Configuration	L_S (nH)	Marking
BAT18-04	SOT23	series	1.8	AUs
BAT18-05	SOT23	common cathode	1.8	ASs

Maximum Ratings at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Value	Unit
Diode reverse voltage	V_R	35	V
Forward current	I_F	100	mA
Junction temperature	T_j	150	°C
Operating temperature range	T_{op}	-55 ... 125	
Storage temperature	T_{stg}	-55 ... 150	

Thermal Resistance

Parameter	Symbol	Value	Unit
Junction - soldering point ¹⁾ BAT18-04, BAT18-05	R_{thJS}	≤ 290	K/W


¹⁾For calculation of R_{thJA} please refer to Application Note Thermal Resistance

Electrical Characteristics at $T_A = 25^\circ\text{C}$, unless otherwise specified

Parameter	Symbol	Values			Unit
		min.	typ.	max.	
DC Characteristics					
Reverse current $V_R = 20\text{ V}$ $V_R = 20\text{ V}, T_A = 60^\circ\text{C}$	I_R	- -	- -	20 200	nA
Forward voltage $I_F = 100\text{ mA}$	V_F	-	0.92	1.2	V
AC Characteristics					
Diode capacitance $V_R = 20\text{ V}, f = 1\text{ MHz}$	C_T	-	0.75	1	pF
Forward resistance $I_F = 5\text{ mA}, f = 100\text{ MHz}$	r_f	-	0.4	0.7	Ω
Charge carrier life time $I_F = 10\text{ mA}, I_R = 6\text{ mA}$, measured at $I_R = 3\text{ mA}$, $R_L = 100\ \Omega$	τ_{rr}	-	120	-	ns
I-region width	W_I	-	3	-	μm


Diode capacitance $C_T = f(V_R)$

$f = 1\text{MHz}$

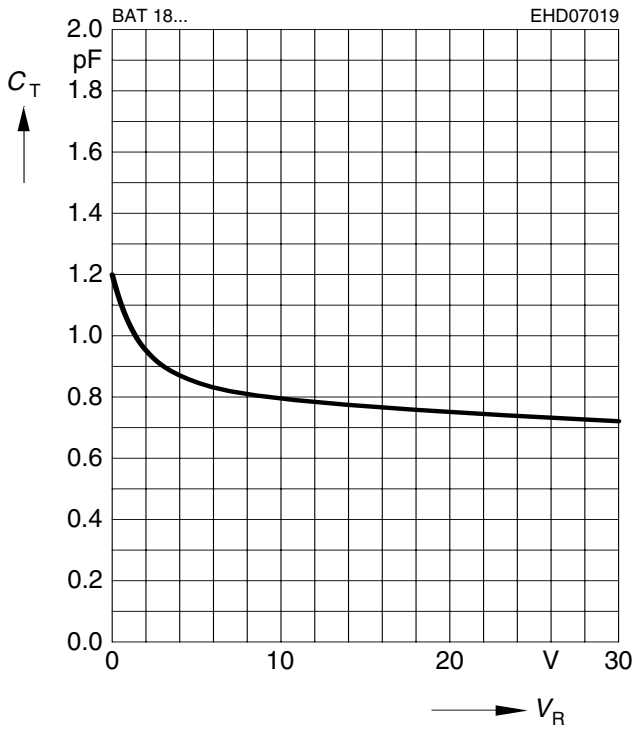

Forward resistance $r_f = f(I_F)$

$f = 100\text{MHz}$

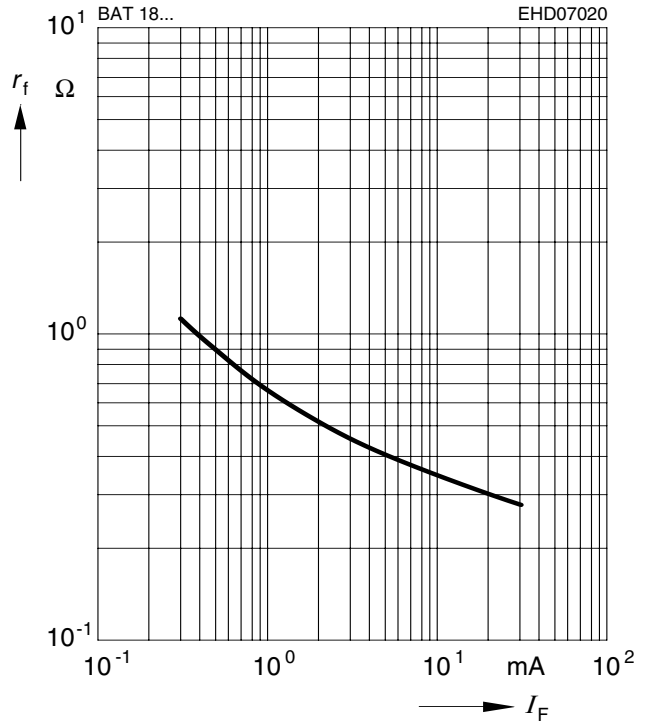



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.