


## SIPMOS® Power Transistor

**BUZ 205**

- N channel
- Enhancement mode
- FREDFET

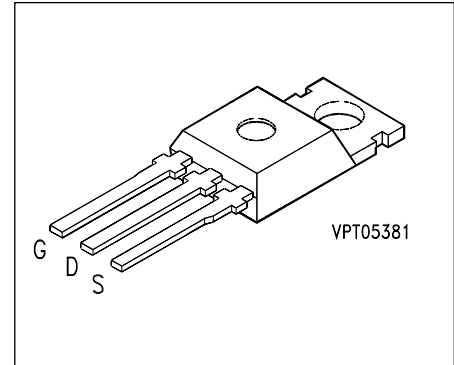

Type	$V_{DS}$	$I_D$	$R_{DS(on)}$	Package <sup>1)</sup>	Ordering Code
<b>BUZ 205</b>	400 V	6.0 A	1.0 $\Omega$	TO-220 AB	C67078-A1401-A2

### Maximum Ratings

Parameter	Symbol	Values	Unit
Continuous drain current, $T_C = 35\text{ °C}$	$I_D$	<b>6.0</b>	A
Pulsed drain current, $T_C = 25\text{ °C}$	$I_{D\text{ puls}}$	<b>24</b>	
Drain-source voltage	$V_{DS}$	<b>400</b>	V
Drain-gate voltage, $R_{GS} = 20\text{ k}\Omega$	$V_{DGR}$	<b>400</b>	
Gate-source voltage	$V_{GS}$	<b><math>\pm 20</math></b>	
Power dissipation, $T_C = 25\text{ °C}$	$P_{tot}$	<b>75</b>	W
Operating and storage temperature range	$T_j, T_{stg}$	<b>- 55 ... + 150</b>	$^{\circ}\text{C}$
Thermal resistance, chip-case	$R_{th\text{ JC}}$	<b><math>\leq 1.67</math></b>	K/W
DIN humidity category, DIN 40 040		<b>E</b>	-
IEC climatic category, DIN IEC 68-1		<b>55/150/56</b>	

1) See chapter Package Outlines.

## Electrical Characteristics

at  $T_j = 25\text{ °C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	

### Static characteristics

Drain-source breakdown voltage $V_{GS} = 0\text{ V}, I_D = 0.25\text{ mA}$	$V_{(BR)DSS}$	400	–	–	V
Gate threshold voltage $V_{GS} = V_{DS}, I_D = 1\text{ mA}$	$V_{GS(th)}$	2.1	4.0	4.0	
Zero gate voltage drain current $V_{DS} = 400\text{ V}, V_{GS} = 0\text{ V}$ $T_j = 25\text{ °C}$ $T_j = 125\text{ °C}$	$I_{DSS}$	– –	20 100	250 1000	$\mu\text{A}$
Gate-source leakage current $V_{GS} = 20\text{ V}, V_{DS} = 0\text{ V}$	$I_{GSS}$	–	10	100	nA
Drain-source on-resistance $V_{GS} = 10\text{ V}, I_D = 4.0\text{ A}$	$R_{DS(on)}$	–	0.9	1.0	$\Omega$

### Dynamic characteristics

Forward transconductance $V_{DS} \geq 2 \times I_D \times R_{DS(on)max}, I_D = 4.0\text{ A}$	$g_{fs}$	1.7	2.9	–	S
Input capacitance $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$	$C_{iss}$	–	1500	2000	pF
Output capacitance $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$	$C_{oss}$	–	120	180	
Reverse transfer capacitance $V_{GS} = 0\text{ V}, V_{DS} = 25\text{ V}, f = 1\text{ MHz}$	$C_{rss}$	–	35	60	
Turn-on time $t_{on}$ , ( $t_{on} = t_{d(on)} + t_r$ ) $V_{DD} = -30\text{ V}, V_{GS} = 10\text{ V}, I_D = 2.7\text{ A}, R_{GS} = 50\text{ }\Omega$	$t_{d(on)}$	–	30	45	ns
	$t_r$	–	40	60	
Turn-off time $t_{off}$ , ( $t_{off} = t_{d(off)} + t_f$ ) $V_{DD} = -30\text{ V}, V_{GS} = 10\text{ V}, I_D = 2.7\text{ A}, R_{GS} = 50\text{ }\Omega$	$t_{d(off)}$	–	110	140	
	$t_f$	–	50	65	

**Electrical Characteristics** (cont'd)at  $T_j = 25\text{ °C}$ , unless otherwise specified.

Parameter	Symbol	Values			Unit
		min.	typ.	max.	


**Reverse diode**

Continuous reverse drain current $T_C = 25\text{ °C}$	$I_S$	–	–	6.0	A
Pulsed reverse drain current $T_C = 25\text{ °C}$	$I_{SM}$	–	–	24	
Diode forward on-voltage $I_S = 12\text{ A}$ , $V_{GS} = 0\text{ V}$	$V_{SD}$	–	1.3	1.6	V
Reverse recovery time $V_R = 100\text{ V}$ , $I_F = I_{DR}$ , $di_F / dt = 100\text{ A}/\mu\text{s}$	$t_{rr}$	–	180	250	ns
Reverse recovery charge $V_R = 100\text{ V}$ , $I_F = I_{DR}$ , $di_F / dt = 100\text{ A}/\mu\text{s}$	$Q_{rr}$	–	0.65	1.2	$\mu\text{C}$

Characteristics at  $T_j = 25^\circ\text{C}$ , unless otherwise specified.

### Total power dissipation


$$P_{\text{tot}} = f(T_C)$$

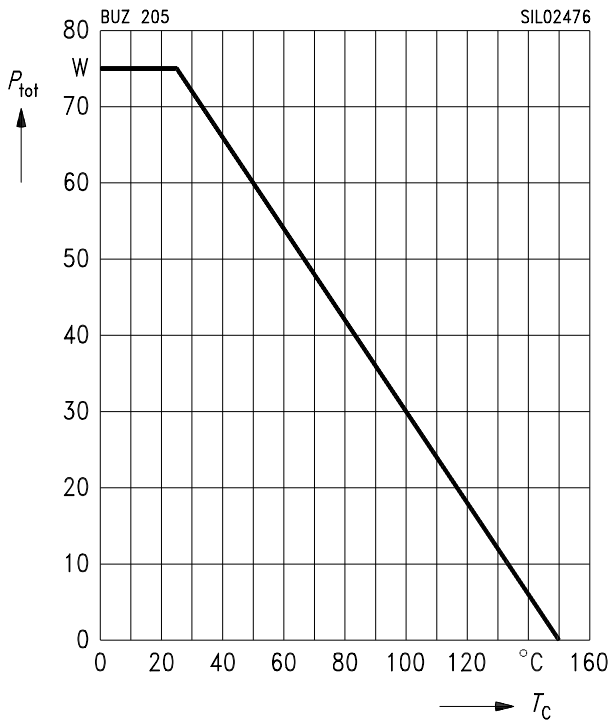

### Typ. output characteristics

$$I_D = f(V_{DS})$$


parameter:  $t_p = 80 \mu\text{s}$

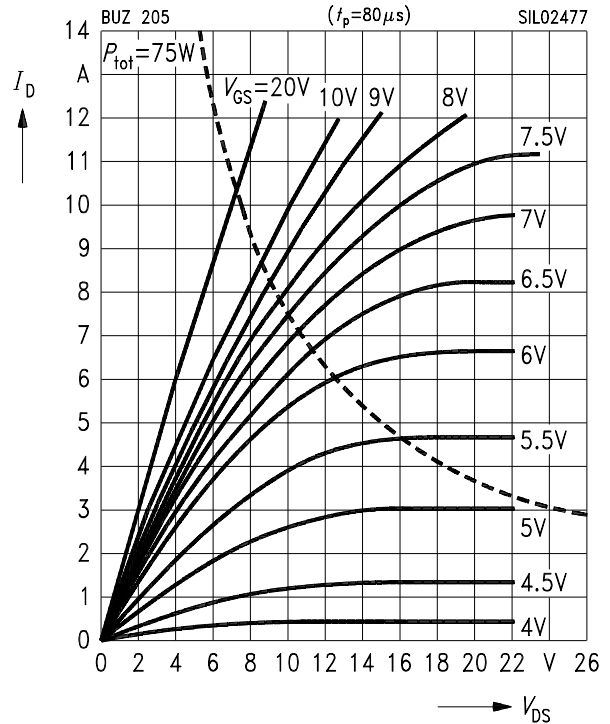

### Safe operating area

$$I_D = f(V_{DS})$$


parameter:  $D = 0.01$ ,  $T_C = 25^\circ\text{C}$

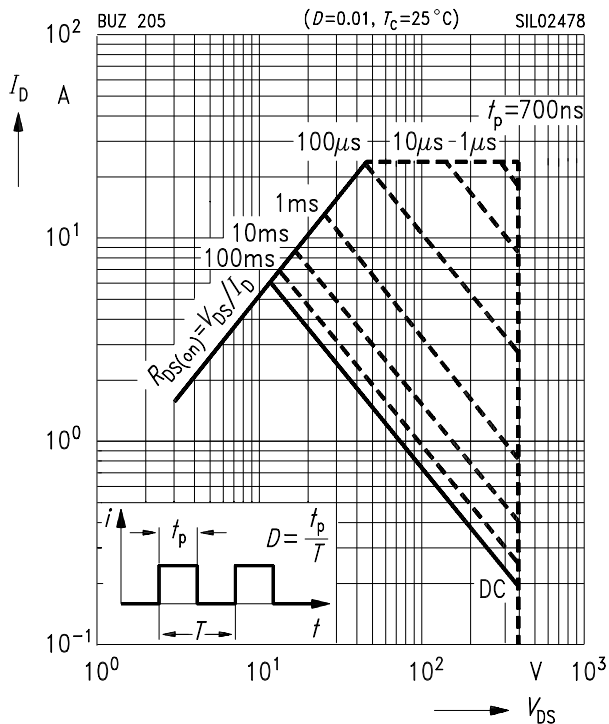

### Typ. transfer characteristics


$$I_D = f(V_{GS})$$

parameter:  $t_p = 80 \mu\text{s}$ ,  $V_{DS} = 25\text{V}$

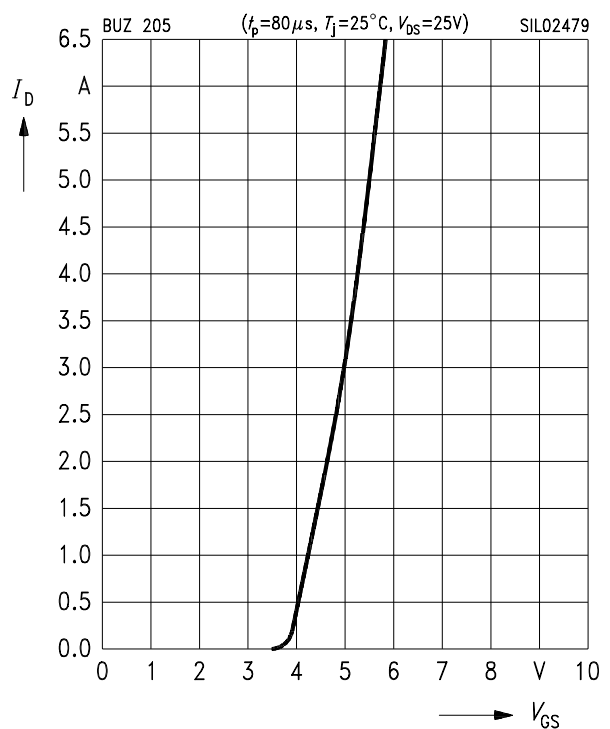


**Typ. drain-source on-resistance**

$R_{DS(on)} = f(I_D)$   
parameter:  $V_{GS}$

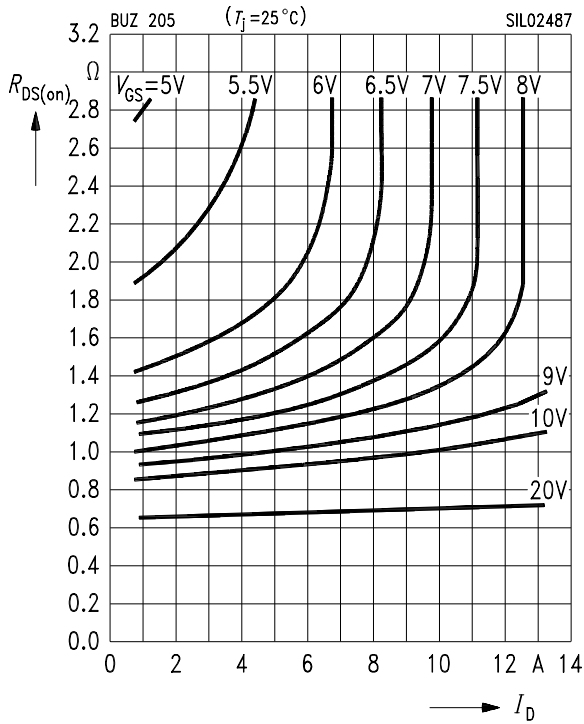


**Drain-source on-resistance**

$R_{DS(on)} = f(T_j)$   
parameter:  $I_D = 4.0\text{ A}$ ,  $V_{GS} = 10\text{ V}$ , (spread)

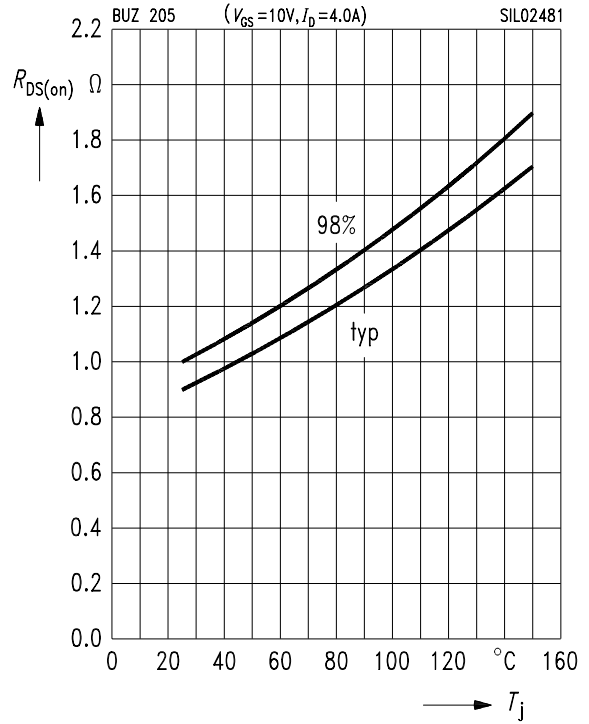


**Typ. forward transconductance**

$g_{fs} = f(I_D)$   
parameter:  $t_p = 80\ \mu\text{s}$

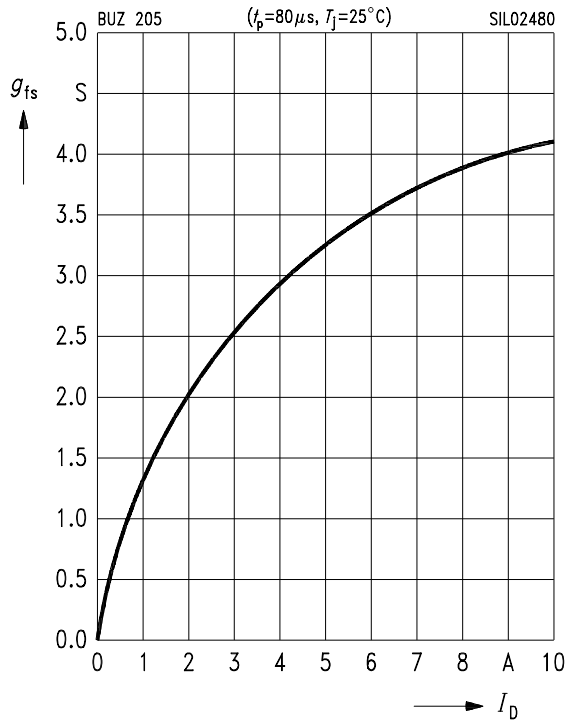

**Gate threshold voltage**


$V_{GS(th)} = f(T_j)$   
parameter:  $V_{GS} = V_{DS}$ ,  $I_D = 1\text{ mA}$ , (spread)

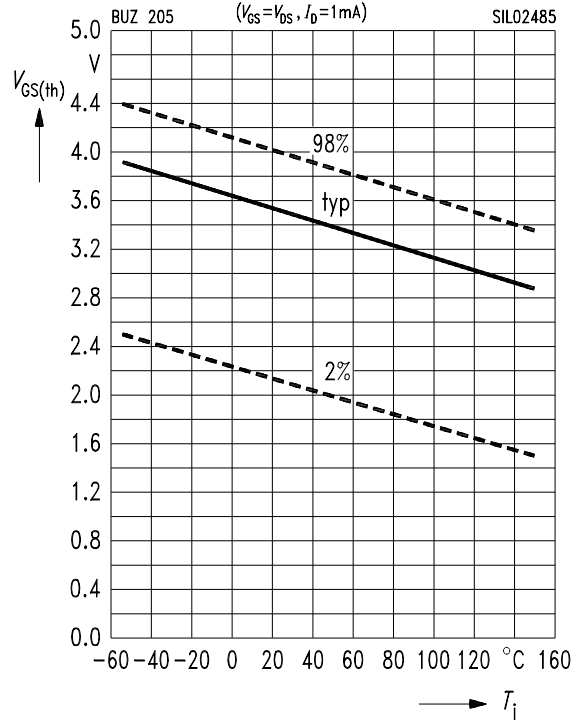

**Typ. capacitances**

$C = f(V_{DS})$


parameter:  $V_{GS} = 0\text{ V}, f = 1\text{ MHz}$

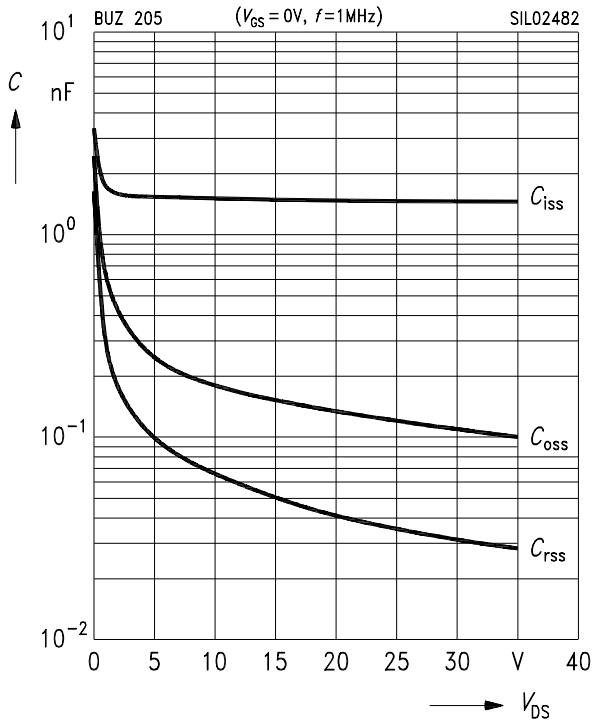

**Drain current**

$I_D = f(T_C)$


parameter:  $V_{GS} \geq 10\text{ V}$

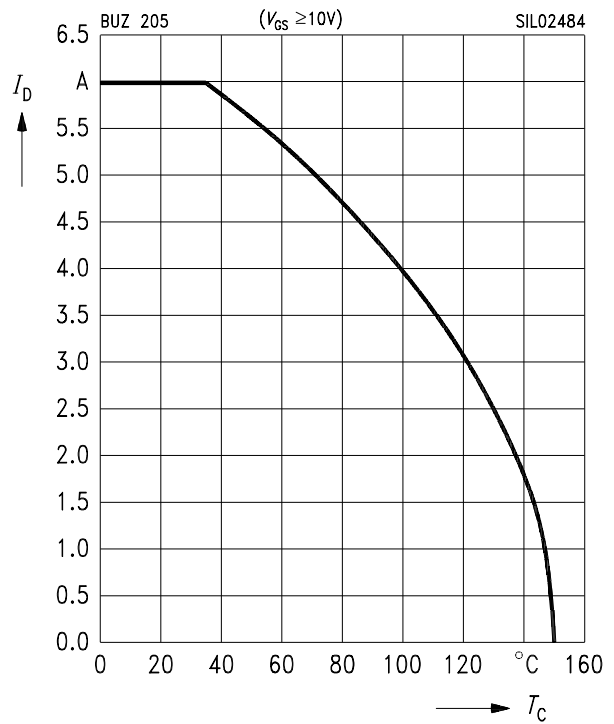

**Forward characteristics of reverse diode**

$I_F = f(V_{SD})$


parameter:  $t_p = 80\ \mu\text{s}, T_j$

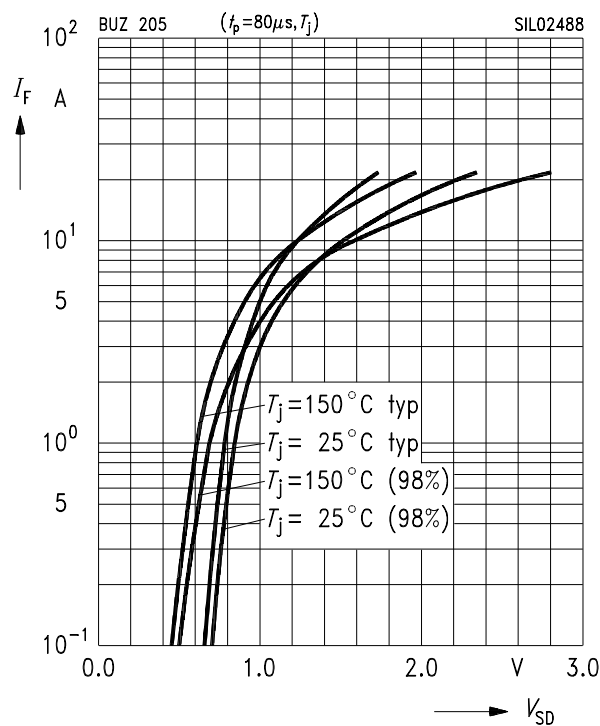

**Transient thermal impedance**

$Z_{thJC} = f(t_p)$

parameter:  $D = t_p / T$

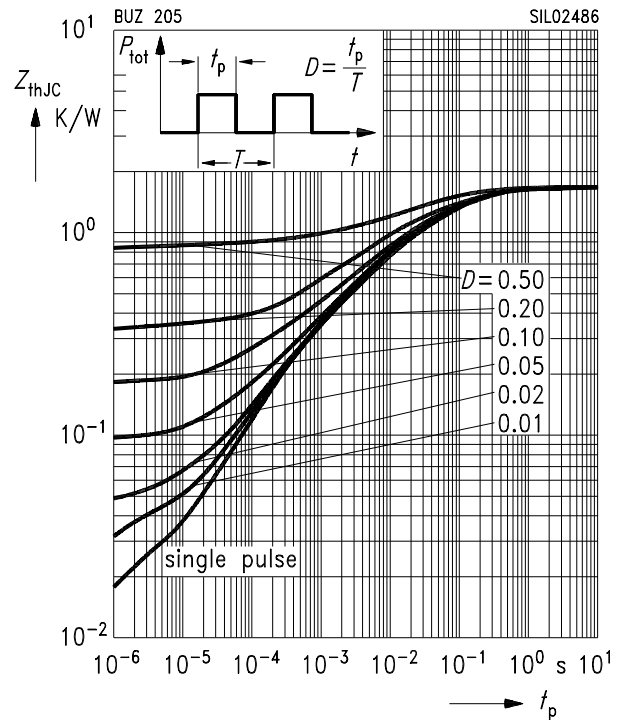



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

[LittleDiode.com](http://LittleDiode.com)

Looking forward to providing you with the best possible service.