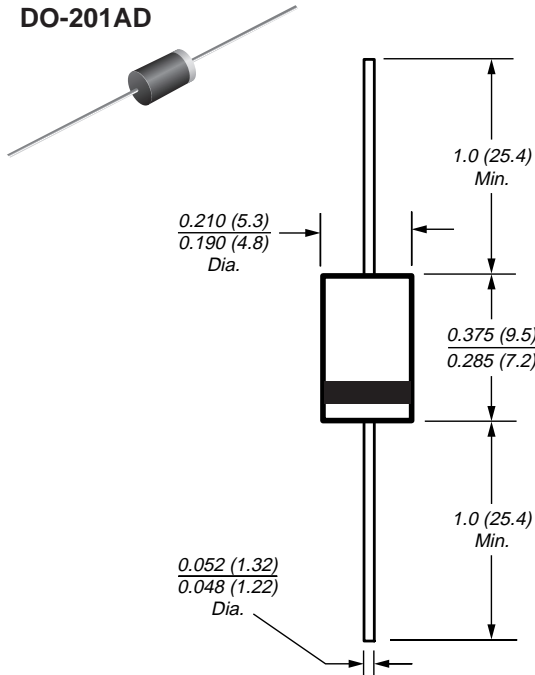


General Purpose Rectifiers

Reverse Voltage
200 to 1300V
Forward Current 3.0A

DO-201AD


Dimensions in inches and (millimeters)

Features

- Plastic package has Underwriters Laboratories Flammability Classification 94V-0
- High surge current capability
- Typical I_R less than $0.1 \mu A$
- Construction utilizes void-free molded plastic technique
- 3.0 Ampere operation at $T_A = 55^\circ C$ with no thermal runaway
- High temperature soldering guaranteed: $250^\circ C/10$ seconds, $0.375"$ (9.5 mm) lead length 5 lbs. (2.3 kg) tension

Mechanical Data

Case: JEDEC DO-201AD, molded plastic body

Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026

Polarity: Color band denotes cathode end

Mounting Position: Any

Weight: 0.04 oz., 1.12 g

Maximum Ratings & Thermal Characteristics Ratings at $25^\circ C$ ambient temperature unless otherwise specified.

Parameter	Symbol	BY251P	BY252P	BY253P	BY254P	BY255P	Unit
Maximum repetitive peak reverse voltage	V_{RRM}	200	400	600	800	1300	V
Maximum RMS voltage	V_{RMS}	140	280	420	560	910	V
Maximum DC blocking voltage	V_{DC}	200	400	600	800	1300	V
Maximum average forward rectified current 10mm lead length at $T_A = 55^\circ C$	$I_{F(AV)}$	3.0					A
Peak forward surge current 10ms single half sine-wave superimposed on rated load (JEDEC Method)	I_{FSM}	150					A
Maximum full load reverse current, full cycle average 10mm lead length at $T_A = 55^\circ C$	$I_{R(AV)}$	100					μA
Typical thermal resistance ⁽¹⁾	$R_{\theta JA}$ $R_{\theta JL}$	20 10					$^\circ C/W$
Operating junction and storage temperature range	T_J, T_{STG}	-65 to +150					$^\circ C$

Electrical Characteristics Ratings at $25^\circ C$ ambient temperature unless otherwise specified.

Maximum instantaneous forward voltage at 3.0A	V_F	1.1					V
Maximum reverse current at rated DC blocking voltage $T_A = 25^\circ C$	I_R	5.0					μA
Typical reverse recovery time $I_F = 0.5A, I_R = 1.0V, I_{rr} = 0.25A$	t_{rr}	3.0					μs
Typical junction capacitance at 4.0V, 1MHz	C_J	40					pF

Note: (1) Thermal resistance from junction to ambient and from junction to lead at $0.375"$ (9.5mm) lead length, P.C.B. mounted

BY251P thru BY255P



Vishay Semiconductors
formerly General Semiconductor

Ratings and Characteristic Curves (T_A = 25°C unless otherwise noted)

Fig 1 - Forward Current Derating Curve

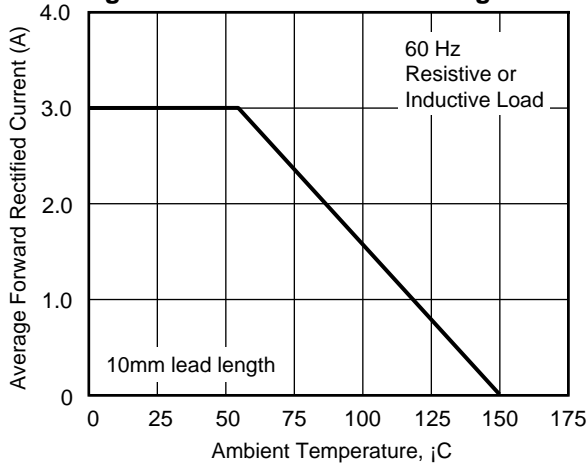


Fig 2 - Maximum Non-repetitive Peak Forward Surge Current

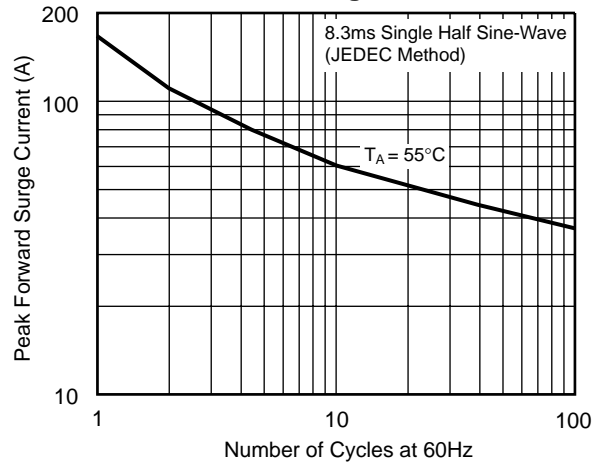


Fig 3 - Typical Instantaneous Forward Characteristics

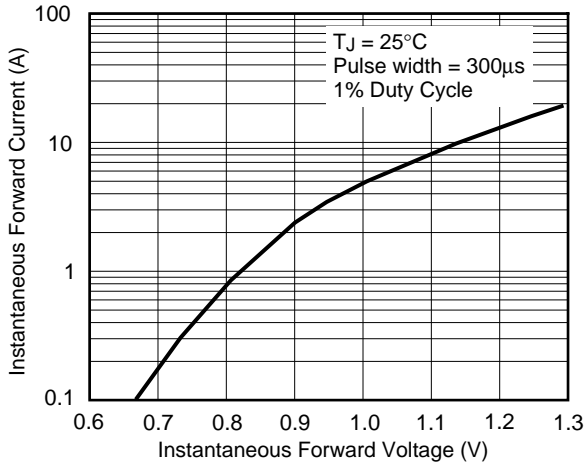


Fig 2 - Maximum Non-repetitive Peak Forward Surge Current


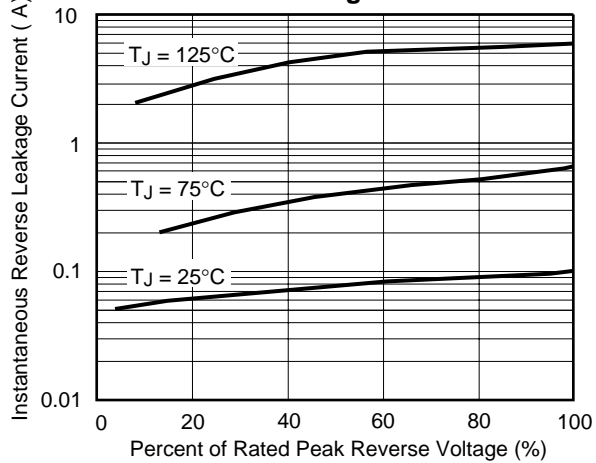


Fig 5 - Typical Junction Capacitance



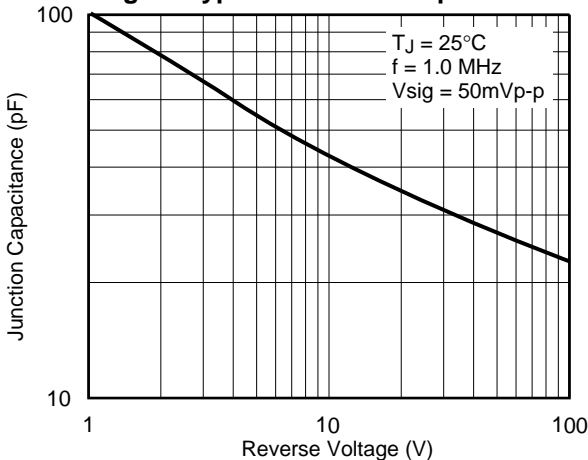

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.