



PACKAGE DIMENSIONS

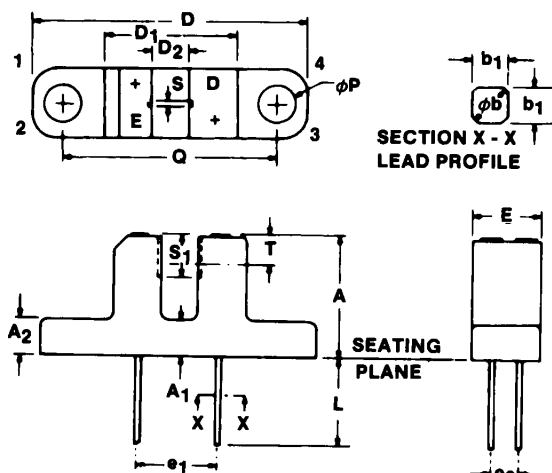

SYMBOL	MILLIMETERS		INCHES		NOTES
	MIN.	MAX.	MIN.	MAX.	
A	10.7	11.0	.422	.433	
A ₁	3.0	3.2	.119	.125	
A ₂	3.0	3.2	.119	.125	
Ⓞb	.600	.750	.024	.030	2
b ₁	.50 NOM.		.020 NOM.		2
D	24.3	24.7	.957	.972	
D ₁	11.0	12.0	.457	.472	
D ₂	3.0	3.3	.119	.129	
e ₁	6.9	7.5	.272	.295	
e ₂	2.3	2.8	.091	.110	
E	.615	6.35	.243	.249	
L	6.00		.315		
Ⓞp	3.2	3.4	.126	.133	
Q	18.9	19.2	.745	.755	
S	.85	1.0	.034	.039	
S ₁	3.45	3.75	.136	.147	
T	2.6 NOM.		.103 NOM.		3

- NOTES:
1. INCH DIMENSIONS ARE DERIVED FROM MILLIMETERS.
 2. FOUR LEADS. LEAD CROSS SECTION IS CONTROLLED BETWEEN 1.27mm (.050") FROM SEATING PLANE AND THE END OF THE LEADS.
 3. THE SENSING AREA IS DEFINED BY THE "S" DIMENSION AND BY DIMENSION "T" ±0.75mm (±.030 INCH).

PACKAGE OUTLINE



DESCRIPTION

The CNY29 is a gallium arsenide infrared emitting diode coupled with a silicon photodarlington in a plastic housing. The gap in the housing provides a means of interrupting the signal with tape, cards, shaft encoders, or other opaque material, switching the output from an "ON" to an "OFF" state.

FEATURES

- Opaque housing
- Low cost
- .035" apertures
- European "Pro Electron" registered



SLOTTED OPTICAL SWITCH

ABSOLUTE MAXIMUM RATINGS ($T_A = 25^\circ\text{C}$ Unless Otherwise Specified)

Storage Temperature	-55°C to +85°C
Operating Temperature	-55°C to +85°C
Soldering:	
Lead Temperature (Iron)	240°C for 5 sec. ^(3,4,5)
Lead Temperature (Flow)	260°C for 10 sec. ^(3,4)

INPUT DIODE

Continuous Forward Current	60 mA
Reverse Voltage	3.0 Volts
Power Dissipation	100 mW ⁽¹⁾

OUTPUT DARLINGTON

Collector-Emitter Voltage	25 Volts
Emitter-Collector Voltage	7 Volts
Power Dissipation	150 mW ⁽²⁾

ELECTRICAL CHARACTERISTICS ($T_A = 25^\circ\text{C}$ Unless Otherwise Specified)

PARAMETER	SYMBOL	MIN.	TYP.	MAX.	UNITS	TEST CONDITIONS
INPUT DIODE						
Forward Voltage	V_F	—		1.7	V	$I_F = 10 \text{ mA}$
Reverse Leakage Current	I_R	—		10	μA	$V_R = 2 \text{ V}$
OUTPUT DARLINGTON						
Emitter-Collector Breakdown	BV_{ECO}	7.0		—	V	$I_E = 100 \mu\text{A}, E_e = 0$
Collector-Emitter Breakdown	BV_{CEO}	25		—	V	$I_C = 10 \text{ mA}, E_e = 0$
Collector-Emitter Leakage	I_{CEO}	—		100	nA	$V_{CE} = 10 \text{ V}, E_e = 0$
COUPLED						
On-State Collector Current	$I_{C(ON)}$	2.5		—	mA	$I_F = 20 \text{ mA}, V_{CE} = 10 \text{ V}$
Saturation Voltage	$V_{CE(SAT)}$	—		1.2	V	$I_F = 20 \text{ mA}, I_C = 0.5 \text{ mA}$
Turn-On Time	t_{on}		150		μs	$I_C = 2.0 \text{ mA}, V_{CC} = 10 \text{ V}, R_t = 750\Omega$
Turn-Off Time	t_{off}		150		μs	$I_C = 2.0 \text{ mA}, V_{CC} = 10 \text{ V}, R_t = 750\Omega$

NOTES

- Derate power dissipation linearly 1.67 mW/°C above 25°C.
- Derate power dissipation linearly 2.50 mW/°C above 25°C.
- RMA flux is recommended.
- Methanol or Isopropyl alcohols are recommended as cleaning agents.
- Soldering iron tip $\frac{1}{16}$ " (1.6 mm) from housing.

TYPICAL CHARACTERISTICS

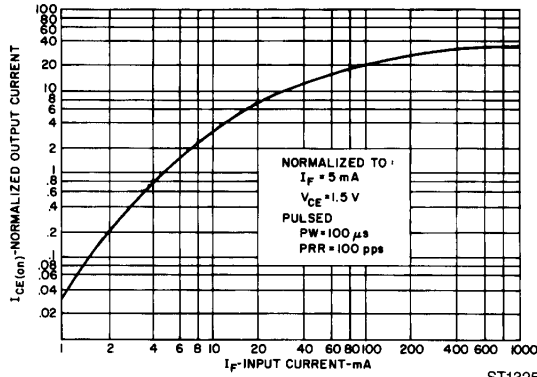


Fig. 1. Output Current vs. Input Current

ST1325

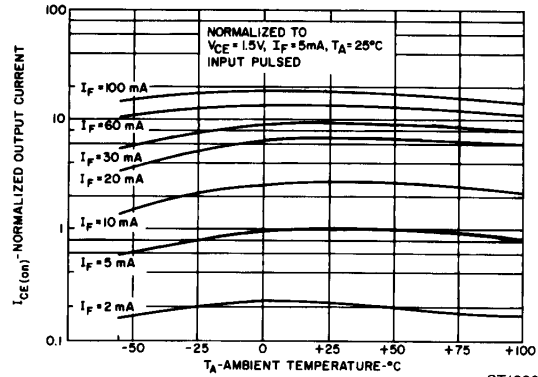


Fig. 2. Output Current vs. Temperature

ST1330

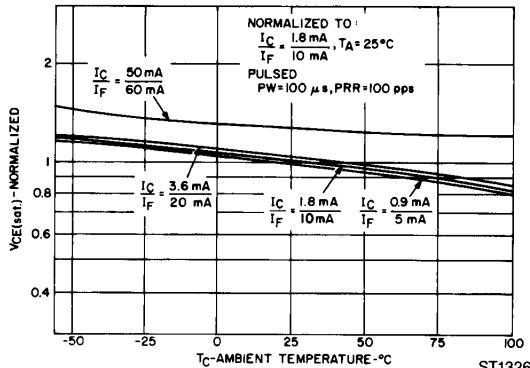


Fig. 3. $V_{CE(sat)}$ vs. Temperature

ST1326

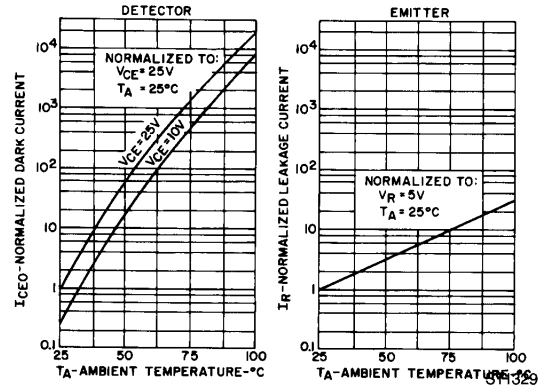


Fig. 4. Leakage Current vs. Temperature

ST1329

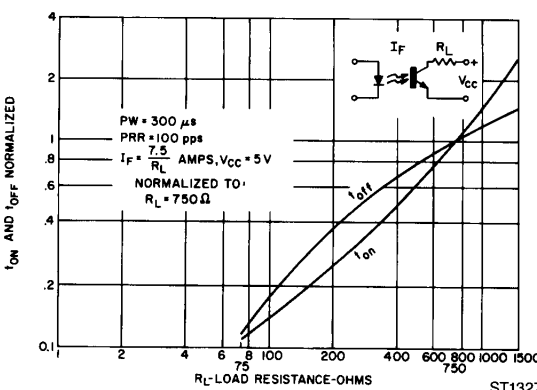


Fig. 5. Switching Speed vs. R_L

ST1327

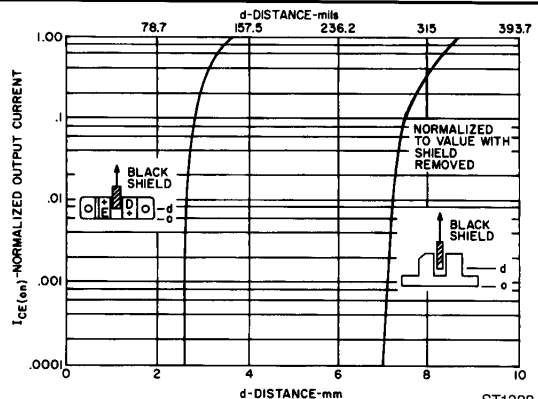


Fig. 6. Output Current vs. Distance

ST1328



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.