

SONY**CX20017****Dual 16 bit, 44 kHz, Multiplexed D/A****Description**

The CX20017 is a 16 bit D/A converter IC for PCM audio using an integration system. Analog signals can be regenerated from 16 bit digital signals by adding an integrator, an analog switch, and a low-pass filter outside the IC.

The following circuits are included as additional functions:

- Two channels for integral current output and discharge signal output.
- Level shift circuit for direct interface with TTLs and MOS LSIs.
- Analog switch drive circuits, etc.

Functions

- 16 bit D/A converter.
- Clock buffer.
- TTL-ECL interface circuit.
- Discharge drive circuit.
- Analog switch drive circuit.

Construction

Silicon monolithic integrated circuit.

Absolute Maximum Ratings (Ta=25°C)


• Power supply voltage:	VCC to VEE	12	V
• Circuit current:	ICC	20	mA
	IEE	-120	mA
• Operating temperature:	Topr	-10 to +75	°C
• Storage temperature:	Tstg	-50 to +150	°C
• Allowable power dissipation:	PD	2.1	W

Recommended Operating Conditions

VCC	5 ± 0.25	V
VEE	-5 ± 0.25	V

Package Outline

Unit: mm

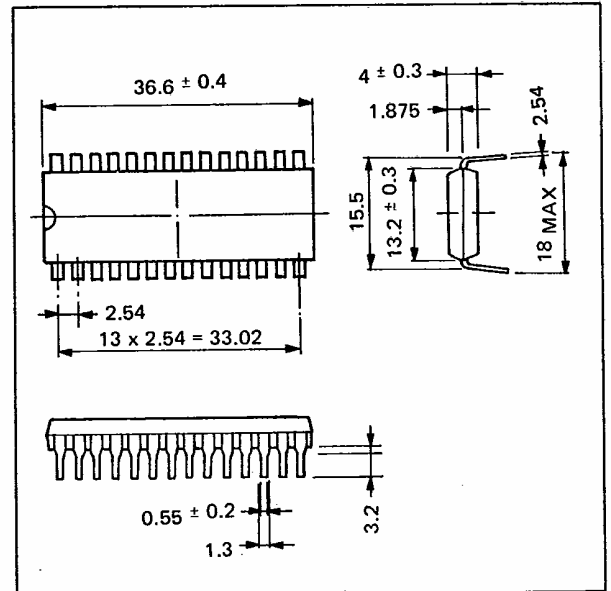

SONY reserves the right to change products and specifications without notice.

This information does not convey any license under patent rights of SONY corporation or others.

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.