



Rectifier Diode Avalanche Diode

$V_{RRM} = 1200-1800 \text{ V}$
 $I_{F(RMS)} = 7 \text{ A}$
 $I_{F(AV)M} = 2.3 \text{ A}$

V_{RSM} V	$V_{(BR)min}$ ① V	V_{RRM} V	Standard Type	Avalanche Types
1300	1300	1200	DS 1-12D	DSA 1-12D
1700	1750	1600		DSA 1-16D
1900	1950	1800		DSA 1-18D

① Only for Avalanche Diodes



A = Anode C = Cathode

Symbol	Test Conditions	Maximum Ratings	
I_{FRMS}	$T_{VJ} = T_{VJM}$	7	A
$I_{F(AV)M}$	$T_{amb} = 45^{\circ}\text{C}; R_{thJA} = 38 \text{ K/W}; 180^{\circ} \text{ sine}$	2.3	A
	$T_{amb} = 45^{\circ}\text{C}; R_{thJA} = 80 \text{ K/W}; 180^{\circ} \text{ sine}$	1.3	A
P_{RSM}	DSA types, $T_{VJ} = T_{VJM}, t_p = 10 \mu\text{s}$	1.6	kW
I_{FSM}	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0; t = 10 \text{ ms (50 Hz), sine}$	110	A
	$t = 8.3 \text{ ms (60 Hz), sine}$	118	A
	$T_{VJ} = T_{VJM}; V_R = 0; t = 10 \text{ ms (50 Hz), sine}$	100	A
	$t = 8.3 \text{ ms (60 Hz), sine}$	104	A
I^2t	$T_{VJ} = 45^{\circ}\text{C}; V_R = 0; t = 10 \text{ ms (50 Hz), sine}$	60	A ² s
	$t = 8.3 \text{ ms (60 Hz), sine}$	58	A ² s
	$T_{VJ} = T_{VJM}; V_R = 0; t = 10 \text{ ms (50 Hz), sine}$	50	A ² s
	$t = 8.3 \text{ ms (60 Hz), sine}$	45	A ² s
T_{VJ}		-40...+150	°C
T_{VJM}		150	°C
T_{stg}		-40...+150	°C
Weight		0.8	g

Features

- Plastic standard package
- Planar glassivated chips


Applications

- Low power rectifiers
- Field supply for DC motors
- Power supplies
- High voltage rectifiers

Advantages

- Space and weight savings
- Simple PCB mounting
- Improved temperature and power cycling
- Reduced protection circuits

Dimensions in mm (1 mm = 0.0394")

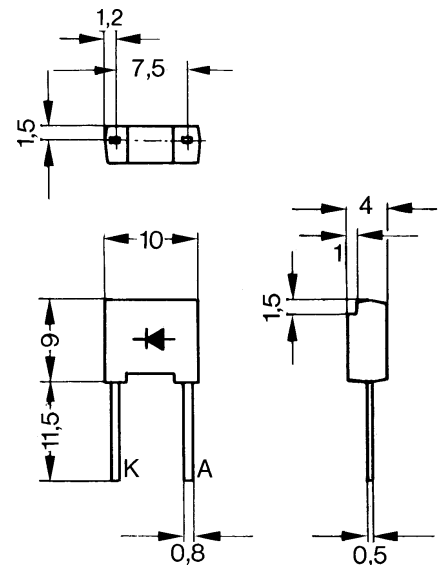

Symbol	Test Conditions	Characteristic Values	
I_R	$T_{VJ} = T_{VJM}; V_R = V_{RRM}$	≤ 0.7	mA
V_F	$I_F = 7 \text{ A}; T_{VJ} = 25^{\circ}\text{C}$	≤ 1.3	V
V_{T0}	For power-loss calculations only	0.8	V
r_T	$T_{VJ} = T_{VJM}$	67	mΩ
R_{thJA}	Forced air cooling with 1.5 m/s, $T_{amb} = 45^{\circ}\text{C}$	38	K/W
	Soldered on to PC board, $T_{amb} = 45^{\circ}\text{C}$	80	K/W
d_s	Creepage distance on surface	8.5	mm
d_A	Strike distance through air	6.7	mm
a	Max. allowable acceleration	100	m/s ²

Data according to IEC 60747

IXYS reserves the right to change limits, test conditions and dimensions



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.