

# F-Series Surface Mount Mixer

## 0.5 - 500 MHz

# FMRS-1


### Features

- \* LO Power +7 dBm
- \* Up to +1 dBm RF
- \* Surface Mount

### Specifications @ 25°C

Frequency Range		
RF		00.5 - 500 MHz
LO		0.5 - 500 MHz
IF		DC - 500 MHz
Conversion Loss (dB)	Typical	Maximum
1 - 250 MHz	5.5	7
0.5 - 500 MHz	6.2	8.5
Isolation (dB)	Typical	Minimum
LO to RF		
5 - 250 MHz	33	25
250 - 500 MHz	27	20
LO to IF		
0.5 - 5 MHz	55	45
5 - 250 MHz	30	23
250 - 500 MHz	24	19

### SM-1

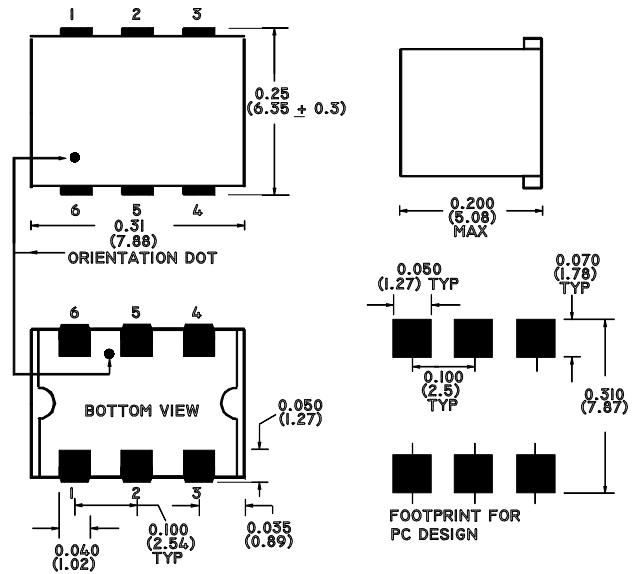

### Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+ 1 dBm

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature ( 10 Seconds )	260°C

Function	Pin No.
LO	1
RF	4
IF	5
Ground	2,3,6
Case Ground	-
Unconnected	-



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

**[LittleDiode.com](http://LittleDiode.com)**

Looking forward to providing you with the best possible service.