

FAIRCHILD

A Schlumberger Company

FRP800 Series T-03-17
Ultra-fast POWERplanar™
Rectifiers 8 A, 50-200 V


Power And Discrete Division

Description

Designed for use in switching power supplies, inverters and as free-wheeling diodes, these state-of-the-art devices have the following features:

- Ultrafast 35 ns Recovery Time
- Soft Recovery ($S > 0.5$)
- Low $I_{R(REC)}$
- 150°C Operating Junction Temperature
- Popular TO-220AC Package
- Low V_{FM}

TO-220AC



FRP805
 FRP810
 FRP815
 FRP820

2

Maximum Ratings

Symbol	Rating	FRP805	FRP810	FRP815	FRP820	Unit
V_{RRM}	Peak Repetitive Reverse Voltage	50	100	150	180	V
V_{RSM}	Non-repetitive Peak Reverse Voltage	50	100	150	200	
V_R	DC Blocking Voltage	50	100	150	180	
$I_{F(AV)}$	Average Rectified Forward Current, $T_C = 130^\circ\text{C}$, Rated V_R	8	8	8	8	A
I_{FRM}	Peak Repetitive Forward Current Rated V_R , 50% Duty Cycle, Square Wave, 20 kHz, $T_C = 130^\circ\text{C}$	16	16	16	16	A
I_{FSM}	Non-repetitive Peak Surge Current per Diode, Surge Applied at Rate Load Conditions Halfwave, Single Phase, 60 Hz	100	100	100	100	A
T_J, T_{stg}	Operating Junction Temperature and Storage Temperature	-55 to +150	-55 to +150	-55 to +150	-55 to +150	$^\circ\text{C}$

Maximum Thermal Characteristics

$R_{\theta JC}$	Maximum Thermal Resistance, Junction to Case	2.5	2.5	2.5	2.5	$^\circ\text{C/W}$
$R_{\theta JA}$	Maximum Thermal Resistance, Junction to Ambient	60	60	60	60	

Notes

For information concerning connection diagram and package outline, refer to Section 7.

FRP800 Series

T-03-17

Symbol	Rating	FRP805	FRP810	FRP815	FRP820	Unit
Electrical Characteristics						
V_{FM}^1	Maximum Instantaneous Forward Voltage					V
	$I_F = 8.0 \text{ A}, T_C = 150^\circ\text{C}$	0.80	0.80	0.80	0.80	
	$I_F = 8.0 \text{ A}, T_C = 25^\circ\text{C}$	0.95	0.95	0.95	0.95	
I_{RRM}^1	Maximum Instantaneous Repetitive Reverse Current					mA μA
	Rated DC Voltage, $T_C = 125^\circ\text{C}$	5.0	5.0	5.0	5.0	
	Rated DC Voltage, $T_C = 25^\circ\text{C}$	10	10	10	10	
t_{rr}	Maximum Reverse Recovery Time					ns
	$I_F = 1.0 \text{ A}, dI_F/dt = 50 \text{ A}/\mu\text{s}$	35	35	35	35	
	$I_F = 8 \text{ A}, dI_F/dt = 100 \text{ A}/\mu\text{s}$	50	50	50	50	
$I_{R(REC)}^2$	Maximum Reverse Recovery Current					A
	$I_F = 8 \text{ A}, dI_F/dt = 100 \text{ A}/\mu\text{s}, V_R = V_{RRM}$	2.5	2.5	2.5	2.5	

Notes

1. Pulse Test: Pulse Width = 300 μs . Duty Cycle $\leq 2.0\%$
2. See Figure 10 for test conditions.

Performance Curves

Figure 1 Maximum Forward Voltage Drop


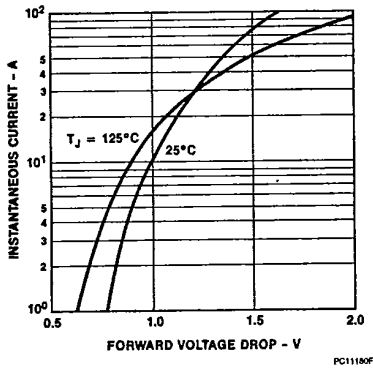



Figure 2 Maximum Power Dissipation

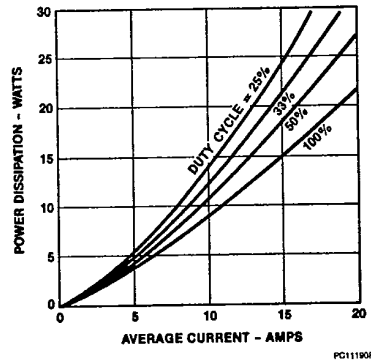

T.03.17


Performance Curves (Cont.)

Figure 3 Transient Thermal Resistance

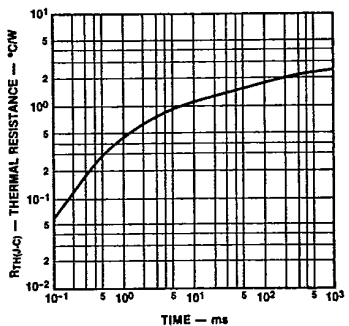


PC11200F

Figure 4 Typical Reverse Leakage Current

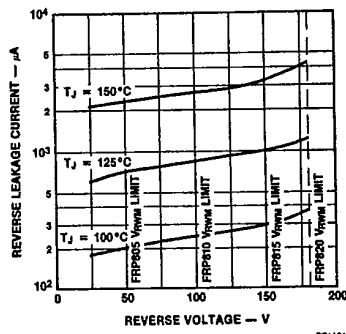


PC11200F

Figure 5 Power Derating

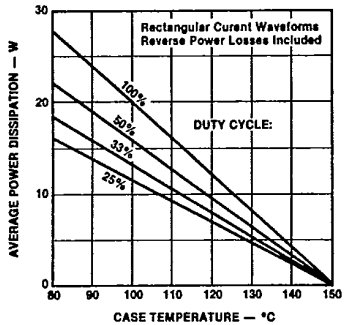


PC11200F

Figure 6 Reverse Recovery Charge

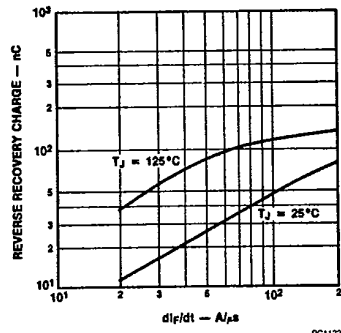

PC11200F

Figure 7 Reverse Recovery Time

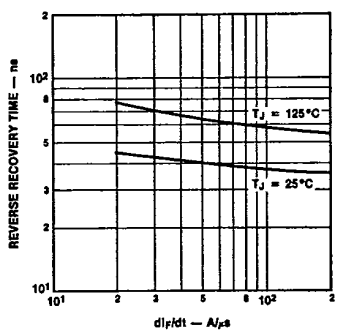


PC11240F

2


Performance Curves (Cont.)

Figure 8 Reverse Recovery Current

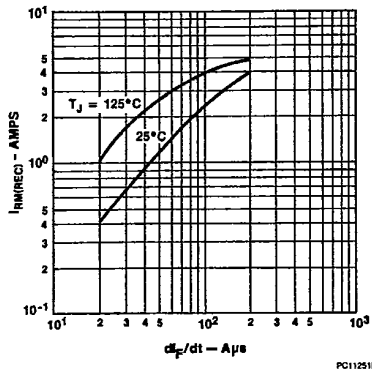


PC11251F

Figure 9 Reverse Recovery Softness

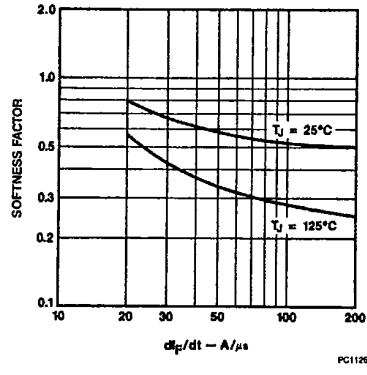

PC11261F

Figure 10 Reverse Recovery Test Waveform

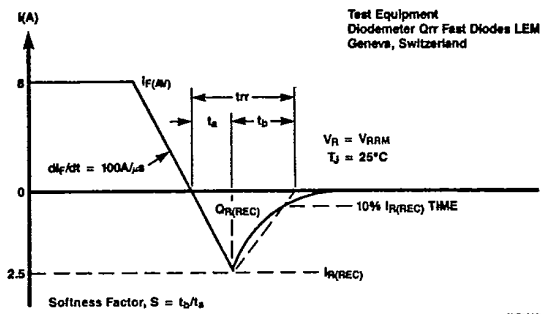

WF00020F

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.