
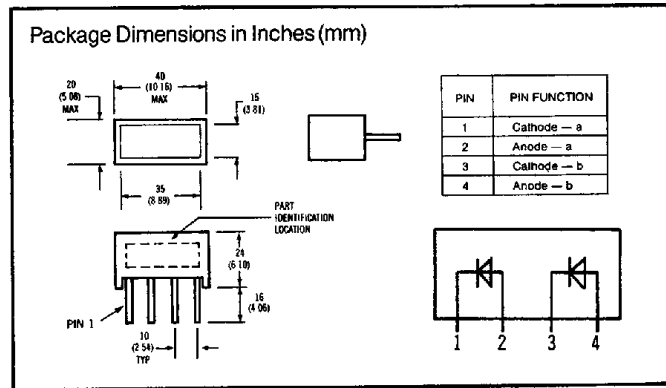


SIEMENS

SUPER-RED OLB 2300 ^{F-41-31}
YELLOW YLB 2400
GREEN GLB 2500
LIGHT BARS

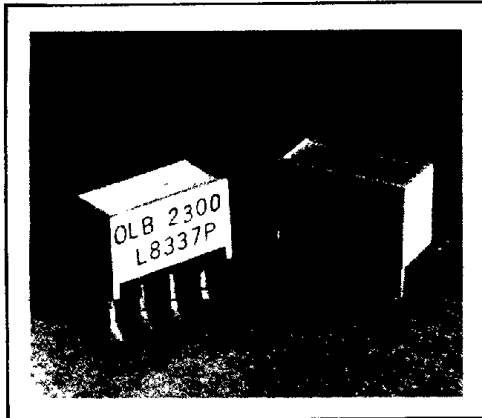

Num. Displays
Bar Graphs
Light Bars

FEATURES

- Small Rectangular Package
- Uniform Light Emitting Area
- Excellent ON/OFF Contrast
- Choice of Three Colors
- Categorized for Light Output
- Yellow and Green Categorized for Dominant Wavelength
- Panel or Legend Mountable
- Can be Mounted on P.C. Boards or SIP/DFP Sockets
- X-Y Stackable
- Suitable for Multiplexing
- IC Compatible

APPLICATIONS

These devices are ideally suited for:

- Message Annunciators
- Positions/Status Indicators
- Telecommunications Indicators
- Bar Graphs

DESCRIPTION

The OLB 2300/YLB 2400/GLB 2500 series light bars are rectangular displays designed for applications requiring a large light emitting area. They are configured in a single in-line package and contain a single light emitting area. The OLB 2300 and YLB 2400 devices utilize two LED chips which are made from GaAsP on a transparent GaP substrate. The GLB 2500 device utilizes two chips made from GaP on a transparent GaP substrate.

Maximum Ratings

| | OLB 2300 & GLB 2500 | YLB 2400 |
|---|---------------------|----------|
| Average Power Dissipation per LED chip | 135mW | 85mW |
| Peak Forward Current per LED chip | 90mA | 60mA |
| Ta = 50°C (max pulse width = 2ms) | | |
| Average Forward Current per LED | 25mA | 20mA |
| Pulsed conditions (Ta = 50°C) | | |
| DC Forward Current Per LED (Ta = 50°C) | 30mA | 25mA |
| Reverse Voltage per LED chip | 6V | |
| Operating Temperature | -40°C to +85°C | |
| Storage Temperature | -40°C to +85°C | |
| Lead Soldering Temperature, 1/16 inch below seating plane | 260°C for 3 sec | |
| Junction Temperature | 100°C | |

Electrical/Optical Characteristics (@ 25°C)

| Parameters | Min. | Typ. | Max. | Units | Test Conditions |
|---------------------|------|------|------|-------|-----------------|
| Luminous Intensity | | | | | |
| OLB2300 | 4.5 | 10 | | mcd | 20mA DC |
| YLB2400 | 4 | 6 | | mcd | 20mA DC |
| GLB2500 | 3.7 | 10 | | mcd | 20mA DC |
| Peak Wavelength | | | | nm | |
| OLB2300 | | 635 | | nm | |
| YLB2400 | | 583 | | nm | |
| GLB2500 | | 565 | | nm | |
| Dominant Wavelength | | | | nm | |
| OLB2300 | | 626 | | nm | |
| YLB2400 | | 585 | | nm | |
| GLB2500 | | 572 | | nm | |
| Forward Voltage | | | | V | |
| OLB2300 | | 1.9 | 2.6 | V | If = 20mA |
| YLB2400 | | 2 | 2.6 | V | If = 20mA |
| GLB2500 | | 2.1 | 2.6 | V | If = 20mA |
| Reverse Voltage | | | | V | |
| OLB2300 | 6 | 15 | | V | IR = 100µA |
| YLB2400 | 6 | 15 | | V | IR = 100µA |
| GLB2500 | 6 | 15 | | V | IR = 100µA |



LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.