


GP08A THRU GP08J

GLASS PASSIVATED JUNCTION RECTIFIER

Reverse Voltage - 50 to 600 Volts Forward Current - 0.8 Ampere

PATENTED*

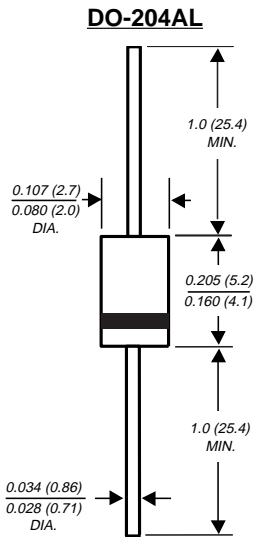

NOTE: Lead diameter is $\frac{0.026 (0.66)}{0.023 (0.58)}$ for suffix "E" part numbers

Dimensions in inches and (millimeters)

* Glass-plastic encapsulation technique is covered by Patent No.3,996,602 and brazed-lead assembly by Patent No.3,930,306

SUPERRECTIFIER®

FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ High temperature metallurgically bonded construction
- ◆ Glass passivated cavity-free junction
- ◆ Capable of meeting environmental standards of MIL-S-19500
- ◆ 0.8 Ampere operation at $T_A=55^\circ\text{C}$ with no thermal runaway
- ◆ Typical I_R less than $0.1\mu\text{A}$
- ◆ High temperature soldering guaranteed: $350^\circ\text{C}/10$ seconds, $0.375"$ (9.5mm) lead length, 5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: JEDEC DO-204AL molded plastic over glass body
Terminals: Plated axial leads, solderable per MIL-STD-750, Method 2026
Polarity: Color band denotes cathode end
Mounting Position: Any
Weight: 0.012 ounce, 0.3 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

| | SYMBOLS | GP08A | GP08B | GP08D | GP08G | GP08J | UNITS |
|--|-----------------|--|-------|-------|-------|-------|---------------------------|
| Maximum repetitive peak reverse voltage | V_{RRM} | 50 | 100 | 200 | 400 | 600 | Volts |
| Maximum RMS voltage | V_{RMS} | 35 | 70 | 140 | 280 | 420 | Volts |
| Maximum DC blocking voltage | V_{DC} | 50 | 100 | 200 | 400 | 600 | Volts |
| Maximum average forward rectified current 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$ | $I_{(AV)}$ | 0.8 | | | | | Amp |
| Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method) at $T_A=55^\circ\text{C}$ | I_{FSM} | 25.0 | | | | | Amps |
| Maximum instantaneous forward voltage at 0.8A | V_F | 1.3 | | | | | Volts |
| Maximum full load reverse current full cycle average 0.375" (9.5mm) lead length at $T_A=55^\circ\text{C}$ | $I_{R(AV)}$ | 30.0 | | | | | μA |
| Maximum DC reverse current at rated DC blocking voltage | I_R | $T_A=25^\circ\text{C}$: 5.0 $T_A=125^\circ\text{C}$: 50.0 | | | | | μA |
| Typical reverse recovery time (NOTE 1) | t_{rr} | 2.0 | | | | | μs |
| Typical junction capacitance (NOTE 2) | C_J | 8.0 | | | | | pF |
| Typical thermal resistance (NOTE 3) | $R_{\theta JA}$ | 55.0 | | | | | $^\circ\text{C}/\text{W}$ |
| Operating junction and storage temperature range | T_J, T_{STG} | -65 to +175 | | | | | $^\circ\text{C}$ |

NOTES:

- (1) Measure on $I_F=0.5\text{A}$, $I_R=1.0\text{A}$, $I_{rr}=0.25\text{A}$
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts
- (3) Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

RATINGS AND CHARACTERISTIC CURVES GP08A THRU GP08J

FIG. 1 - FORWARD CURRENT DERATING CURVE

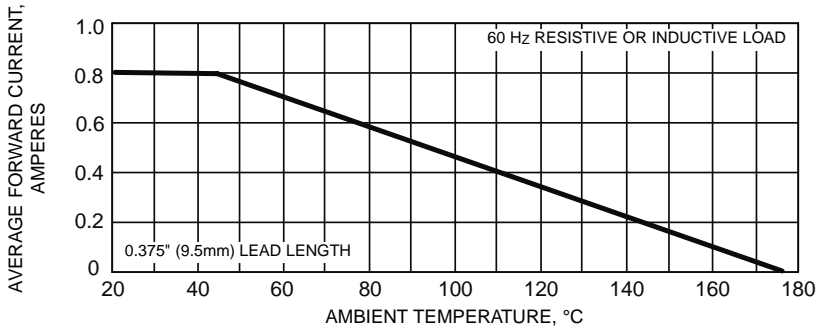


FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

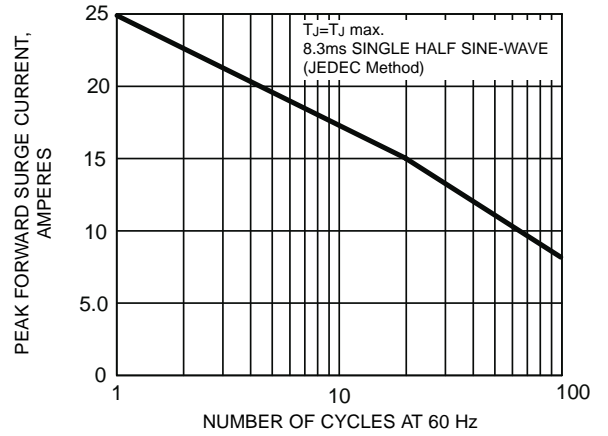


FIG. 3 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

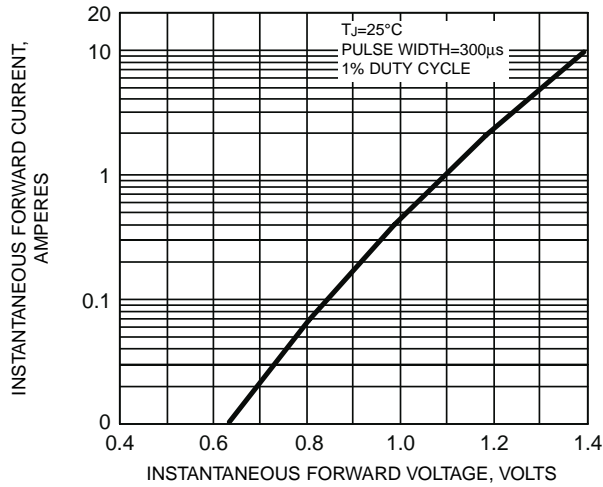


FIG. 4 - TYPICAL REVERSE CHARACTERISTICS

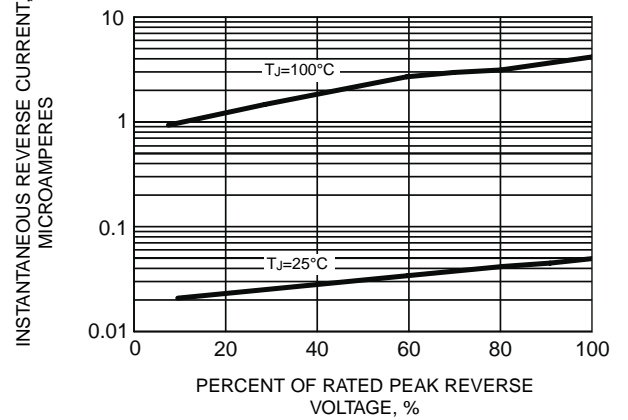


FIG. 5 - TYPICAL JUNCTION CAPACITANCE


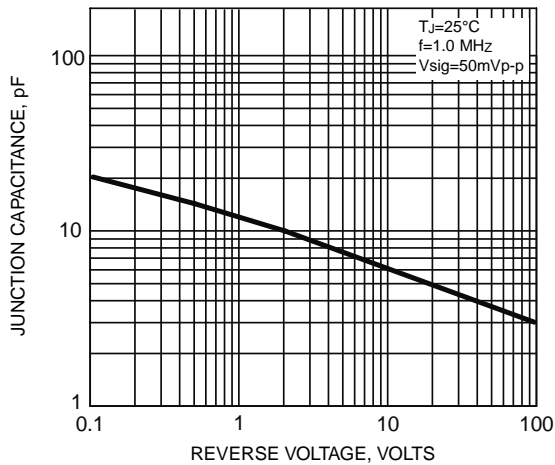


FIG. 6 - TYPICAL TRANSIENT THERMAL IMPEDANCE



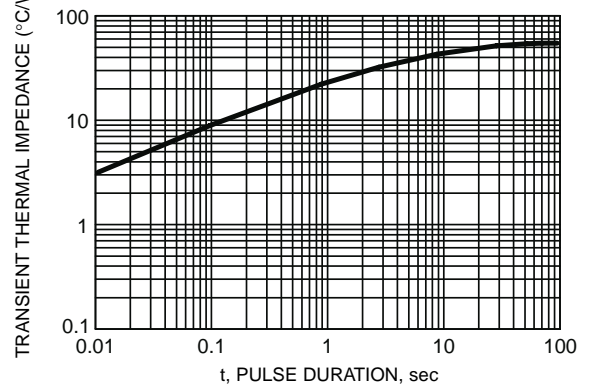

LittleDiode supplies new, hard to find or obsolete electronic components and semiconductors all over the world.

With over two million different components listed you are sure to find the part you need.

Feel free to visit us today at our online store:

LittleDiode.com

Looking forward to providing you with the best possible service.